

The Study of Winter Wheat Biomass Estimation Model Based on Hyperspectral Remote Sensing

Xiaowei Teng^{1,2,3,4,5}, Yansheng Dong^{1,2,3,4(✉)}, and Lumin Meng⁵

¹ Beijing Research Center for Information Technology in Agriculture, Beijing 100097, China
tengxw1990@163.com

² National Engineering Research Center for Information Technology in Agriculture,
Beijing 100097, China
dongys@nercita.org.cn

³ Key Laboratory of Agri-informatics, Ministry of Agriculture, Beijing 100097, China

⁴ Beijing Engineering Research Center of Agricultural Internet of Things, Beijing 100097, China

⁵ College of Geomatics, Xi'an University of Science and Technology, Xi'an 710054, China
1193824953@qq.com

Abstract. Biomass plays an important role in crop growth and yield formation. The study of biomass has been expanded to remote sensing sphere, which provides more ways to the obtainment of crop biomass. To carry out the study of winter wheat biomass estimation model, the field experiments were conducted at Rougu test area and Wugong test area, Shanxi Province in the cropping season 2013–2014. The biomass estimation model was based on the Time-Integrated Value of NDVI (TINDVI) and Leaf Water Content Index (LWCI), which was used to predict the winter wheat biomass. And the model was validated with the ground measured biomass. The results showed that the determination coefficient (R^2) and root mean square error (RMSE) between the measured and the estimated biomass were 0.7949 and 2.689 t/ha, respectively. The estimated biomass was exactly similar to the field measured biomass, therefore this model had a good application prospect.

Keywords: Winter wheat · Biomass · Hyperspectral remote sensing · TINDVI · LWCI

1 Introduction

The information of crop growing and health condition is essential to the optimization of crop production [1]. Biomass is an important indicator of crop condition monitoring [2]. The quantity of biomass affects the grain yield directly [3]. Many methods can be used to monitor crop biomass, including the estimation of remote sensing information, the prediction of crop model based on remote sensing and so on.

In recent years, a large number of scholars build numerous regression models of biomass estimation with the correlativity between remote sensing information and measured biomass, which have proved that the agronomy parameters just like Biomass

and Leaf N could be evaluated. He Cheng used three kinds of data, the Thematic Mapper data, the 30 meters Digital Elevation Model data and field observation data, to get the functional relation which was possibly applied between vegetation biomass and remote sensing image information [4]. Liu Ming used ten spectral vegetation indices to estimate the LAI and biomass, and the consequences indicated that the correlations between ten vegetation indices and LAI, aboveground biomass were significant, thus using vegetation indexes to inverse LAI and aboveground biomass was feasible [5]. Gao Shuai designed the microwave and optical remote sensing integrated vegetation indexes with the RADARSAT-2 and HJ-1 data, and the results showed that compared with original methods, these vegetation indexes had a better evaluating performance with the structure parameters just like maize LAI, height and biomass [6]. Calera et al. monitored the growth of corn and barley by applied remote sensing data, and the results showed that the value of TINDVI was linearly related to dry biomass [7]. With the purpose of establishing a spatial-temporal model for future TINDVI, Andreas Westergaard-Nielsen combined TINDVI and observed temperatures with a downscaled regional climate model (HIRHAM5) [8]. Hunt mentioned a leaf water content index (LWCI), which was calculated by Landsat near infrared band reflectance and shortwave infrared band reflectance, and proved that the leaf water content index had a good correlation with the relative water content [9]. Daeha Kim mentioned a biomass estimation model, which was based on the studies of Calera and Hunt [10].

Research of remote sensing technology for biomass estimation has been undertaken by many predecessors, and they have made corresponding progress, which has made a significant contribution. However, most of the estimation models are not universal, and are only suitable for local area, which goes against the popularization of these models. Daeha Kim mentioned a biomass model based on the value of NDVI and crop information data, but the model was not been validated by the field measured biomass. The paper adopts the biomass model of Daeha Kim, and to estimate the biomass collected at Rougu test area and Wugong test area with the hyperspectral remote sensing, hoping that the model can be applied in different areas.

2 Site Description

Field experiments were implemented in the Rougu test region and Wugong test region, Shanxi Province, China (Fig. 1). The test sites are located in central of Shanxi GuanZhong Plain, which is a typical arid and semi-arid region. The average temperature of summer is 26.1°C, and the average temperature of winter is -1.2°C. The average rainfall of the test sites is 635.1 mm. The main crops of the two areas are winter wheat and summer maize. Most of the winter wheat is sowed in the middle of October, and is harvested in early June. Five times field experiments were carried out and the measured agronomy parameters (Table 1) were obtained which included wheat canopy spectra, aboveground biomass and yield. The wheat canopy spectra was measured by the America ASD FieldSpec FR 2500 field spectral radiometer. The aboveground biomass and yield were measured by wheat samples obtained from each plot.

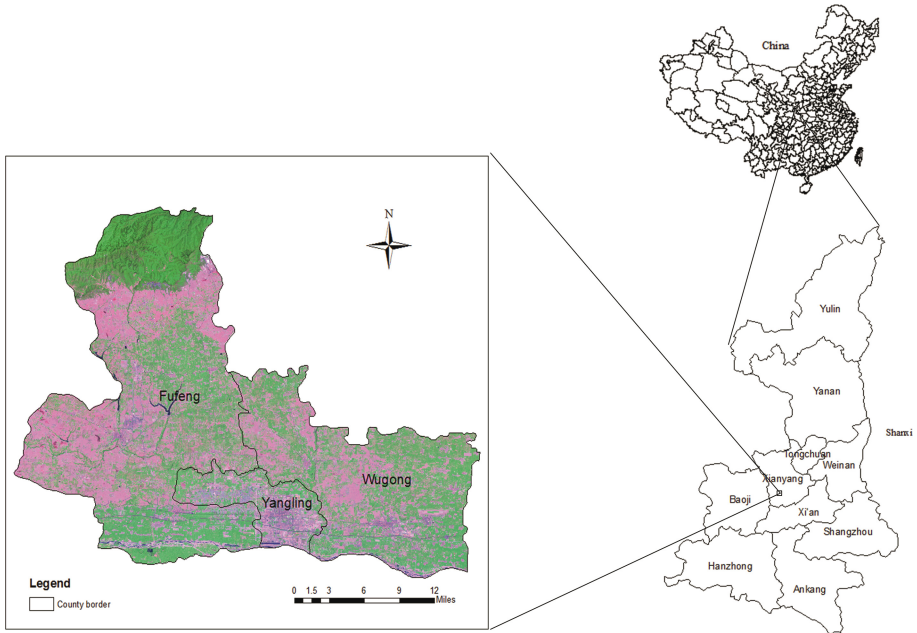


Fig. 1. The study area

Table 1. The testing time and growth period of winter wheat in the cropping season 2013–2014

Testing time	Mar 05–06	Mar 28–29	Apr 27	May 16–17	Jun 10
Growth period	Returning green stage	Jointing stage	Heading period	Pustulation period	Mature period

3 Methods

3.1 Model Description

Combining the previous researches [7, 9], Daeha Kim [10] invented the biomass model which was based on TM, ETM and OLI images, and involved the growth of TINDVI and the influence of water stress. The core principle of this model is that it translates the value of TINDVI into biomass under comprehensively considering the water stress coefficient. The equation for calculating biomass production is as follows:

$$B_{ASD} = m \times W \times TINDVI \tag{1}$$

Where m is conversion coefficient from the value of TINDVI to biomass. W is the water pressure coefficient or water pressure factor. B_{ASD} is biomass estimated from hyperspectral remote sensing. NDVI is the Normal Differential Vegetation Index,

which is computed from reflectances of red band and near infrared band [11]. TINDVI is the Time Integrated Value of NDVI. And it is calculated as:

$$TINDVI = \int_{t_0}^{t_1} (NDVI - NDVI_{soil}) dt \quad (2)$$

$$NDVI_{ASD} = \frac{NIR - RED}{NIR + RED} = \frac{R_{890} - R_{670}}{R_{890} + R_{670}} \quad (3)$$

Where t_0 is the start time of returning green stage, and t_1 is the time when biomass is estimated. $NDVI_{soil}$ is NDVI of bare soil. RED and NIR are red band reflectances and near infrared band reflectances, respectively. R_{890} and R_{670} are the reflectances of 890th band and 670th band, respectively.

For dry leaves, the reflectance of shortwave infrared band is almost equal to the reflectance of near infrared band [12–14]. For green leaves, near infrared band has the maximum reflectance of the six Thematic Mapper band, whereas the shortwave infrared band reflectance is reduced because of absorption by water [14, 15]. So that the difference between the shortwave infrared band reflectance and the near infrared band reflectance for the green leaves should be equivalent to the water absorbance in the green leaves [9]. Absorbance is usually calculated by $-\log(1 - a)$, where a is the absorbance [16]. So that the biomass model regards the LWCI as the water pressure coefficient, and the water pressure coefficient [9] is defined by NIR and SWIR as:

$$W = LWCI = \frac{-\log [1 - (NIR - SWIR)]}{-\log [1 - (NIR - SWIR)_{FT}]} \quad (4)$$

Where SWIR is the reflectance of shortwave infrared band. This study uses the 890th and 1610th band reflectances of hyperspectral remote sensing instead of NIR and SWIR. The subscript means that the reflectances of these leaves are in the state without water stress.

The biomass conversion coefficient is associated with the region and the cultivar of winter wheat, which is determined by the value of TINDVI and the conservative biomass at mature. The equation of biomass conversion coefficient m is as follows:

$$\hat{m} = \frac{B_h}{E[W \times TINDVI]} \quad (5)$$

Where B_h is the conservative biomass at mature, and $E[W \times TINDVI]$ is the average of $W \times TINDVI$ in the region.

3.2 Model Verification

The R^2 and RMSE were applied to evaluate the biomass estimation results. The more the R^2 close to 1, the more the consistency well. And the more the RMSE close to 0, the more the error small. RMSE is calculated based on Eq. (6).

$$RMSE = \sqrt{\frac{\sum_{i=1}^n (E_i - M_i)^2}{n}} \tag{6}$$

4 Results and Discussions

The estimated winter wheat biomass in the cropping season 2013–2014 was validated with the field measured biomass. In the analysis, the R^2 between estimated biomass and measured biomass in the period of Mar 05–06, Mar 28–29, Apr 27 and May 16–17 were 0.2836, 0.2042, 0.3412 and 0.1976, respectively (Fig. 2). The estimated biomass precision was slightly lower in single period. The maximum and minimum correlation coefficients were 0.3412 and 0.1976, respectively. The biomass estimation precisions were in the range of acceptable precision.

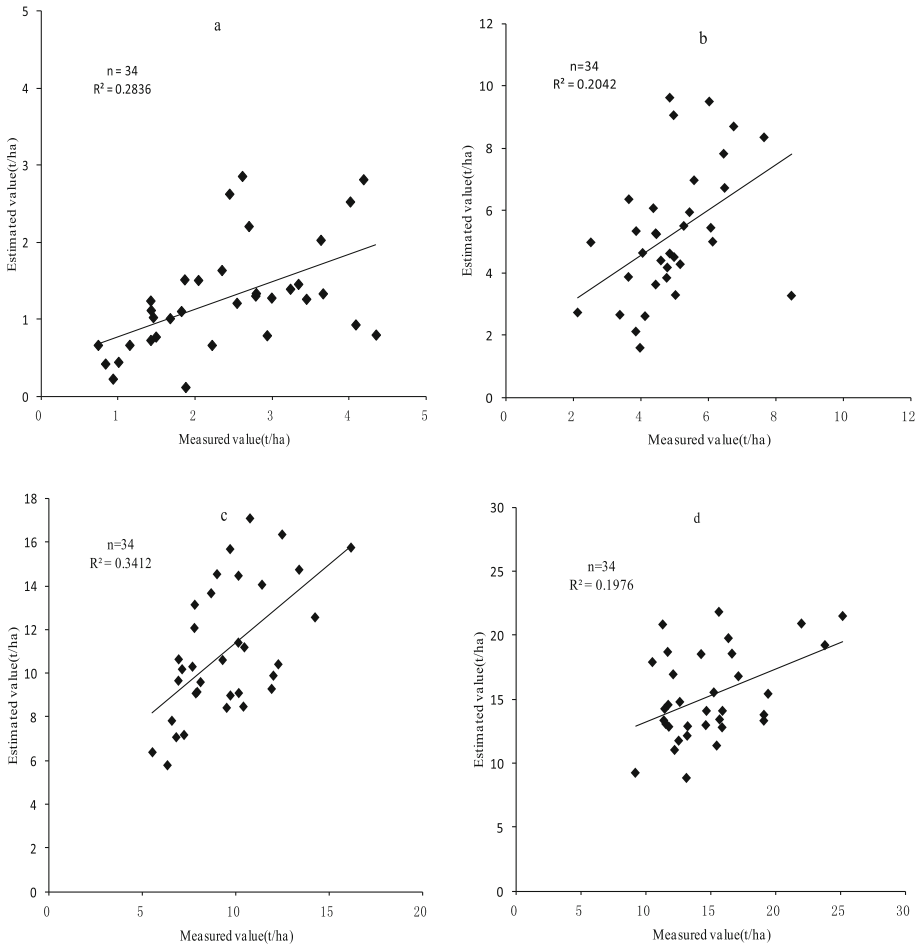


Fig. 2. The relationship between estimated biomass and measured biomass in the period of Mar 05–06 (a), Mar 28–29 (b), Apr 27 (c) and May 16–17 (d)

The R^2 and RMSE between the estimated and measured biomass in the whole period of winter wheat were 0.7949 and 2.689 t/ha, respectively (Fig. 3). The whole period of winter wheat estimated biomass had a higher correlation with the measured biomass.

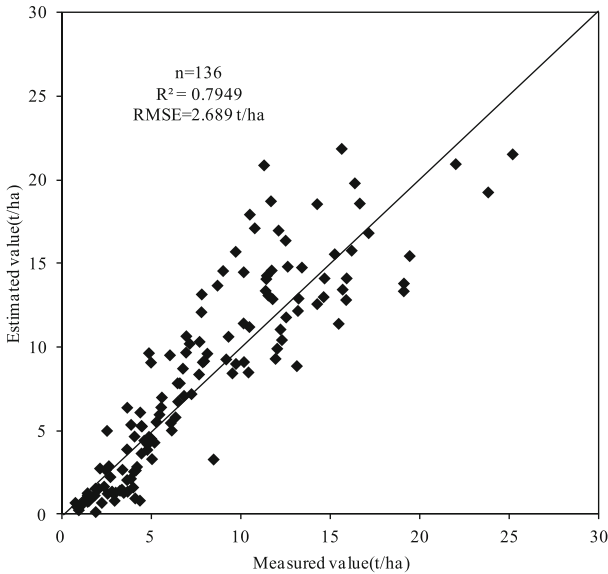


Fig. 3. The relational graph between estimated biomass and measured biomass in the whole period of winter wheat

Thus, the correlations between estimated biomass and measured biomass suggested that this biomass estimation model was viable. In this study, the TINDVI and LWCI were applied to estimate the biomass of winter wheat, which has more advantages than the biomass regression models. Because it can be applied to different areas. Moreover, it combined the former studies by considering both the TINDVI growth and the effect of water stress on biomass growth [10]. But this model had little consideration on rainfall data and irrigation data. Only four biomass tests were carried out in the cropping season 2013–2014, which lead to a deviation from the NDVI real situation curve. So that the each times single predicted precisions were slightly lower. This model is a new biomass model, thus the further research is required to verify and perfect the model.

5 Conclusion

This study carried out winter wheat biomass estimation based on a new biomass model through hyperspectral remote sensing, and it was verified by the field experimental data from Rougu test area and Wugong test area. The estimated wheat biomass had a higher correlation with the field measured biomass. Certainly, more field experiments should be carried out. In order to furtherly verify and perfect the biomass model, the meteorological data and field management data should also be considered. Finally, the model

should be applied to remote sensing images. This paper may be valuable in guiding further study about crop biomass estimation.

Acknowledgments. The work is supported by the National Science Foundation (NNSF) of China (41401476).

References

1. Kross, A., Mcnairn, H., Lapen, D., Sunohara, M., Champagne, C.: Assessment of RapidEye vegetation indices for estimation of leaf area index and biomass in corn and soybean crops. *Int. J. Appl. Earth Obs. Geoinf.* **34**, 235–248 (2015)
2. Du, X., Meng, J.H., Wu, B.F.: Overview on monitoring crop biomass with remote sensing. *Spectro. Spectral Anal.* **11**, 3098–3102 (2010)
3. Ma, Q.R., Li, S.Z., Zhao, H.Q., Yang, G.X., Wu, D.Y., Dong, W.H.: A study on accumulation and increment distribution of biomass of summer maize in Zhengzhou. *Chin. J. Agrometeorology* **28**(4), 430–432 (2007)
4. He, C., Feng, Z.K., Han, X., Sun, M.Y., Gong, Y.X., Gao, Y., Dong, B.: The inversion processing of vegetation biomass along Yongding river based on multispectral information. *Spectrosc. Spectral Anal.* **32**(12), 3353–3357 (2012)
5. Liu, M., Feng, R., Ji, R.P., Wu, J.W., Wang, H.B., Yu, W.Y.: Estimation of leaf area index and aboveground biomass of spring maize by MODIS-NDVI. *Chin. Agric. Sci. Bull.* **31**(6), 80–87 (2015)
6. Gao, S., Niu, Z., Huang, N., Hou, X.: Estimating the leaf area index, height and biomass of maize using HJ-1 and RADARSAT-2. *Int. J. Appl. Earth Obs. Geoinf.* **24**, 1–8 (2013)
7. Calera, A., González-Piqueras, J., Melia, J.: Monitoring barley and corn growth from remote sensing data at field scale. *Int. J. Remote Sens.* **25**(1), 97–109 (2004)
8. Westergaard-Nielsen, A., Bjørnsson, A.B., Jepsen, M.R., Stendel, M., Hansen, B.U., Elberling, B.: Greenlandic sheep farming controlled by vegetation response today and at the end of the 21st Century. *Sci. Total Environ.* **512**, 672–681 (2015)
9. Hunt, E.R., Rock, B.N., Nobel, P.S.: Measurement of leaf relative water content by infrared reflectance. *Remote Sens. Environ.* **22**(3), 429–435 (1987)
10. Kim, D., Kaluarachchi, J.: Validating FAO AquaCrop using landsat images and regional crop information. *Agric. Water Manage.* **149**, 143–155 (2015)
11. Rouse, J.W., Haas, R.H., Schell, J.A., Deering, D.W., Harlan, J.C.: Monitoring the vernal advancement and retrogradation (greenwave effect) of natural vegetation. Texas A & M University, Remote Sensing Center (1974)
12. Thomas, J.R., Namken, L.N., Oerther, G.F., Brown, R.G.: Estimating leaf water content by reflectance measurements. *Agron. J.* **63**(6), 845–847 (1971)
13. Rock, B.N., Williams, D.L., Vogelmann, J.E.: In Machine Processing of Remotely Sensed Data Symposium, pp. 71–81. Purdue University, West Lafayette (1985)
14. Knippling, E.B.: Physical and physiological basis for the reflectance of visible and near-infrared radiation from vegetation. *Remote Sens. Environ.* **1**(3), 155–159 (1970)
15. Tucker, C.J.: Remote Sensing of Leaf Water Content in the Near Infrared. US National Aeronautics and Space Administration, Goddard Space Flight Center, Greenbelt, Md. NASA-TM-80291 (1979)
16. Nobel, P.S., Jordan, P.W.: Transpiration stream of desert species: resistances and capacitances for a C3, a C4, and a CAM plant. *J. Exp. Bot.* **34**(10), 1379–1391 (1983)