

## GRI: focusing on the evolving violent universe

Jürgen Knödseder · Peter von Ballmoos ·  
Filippo Frontera · Angela Bazzano · Finn Christensen ·  
Margarida Hernanz · Cornelia Wunderer

Received: 30 November 2007 / Accepted: 17 July 2008 / Published online: 6 September 2008  
© Springer Science + Business Media B.V. 2008

**Abstract** The gamma-ray imager (GRI) is a novel mission concept that will provide an unprecedented sensitivity leap in the soft gamma-ray domain by

---

All authors are on behalf of a large international collaboration

The GRI mission has been proposed as an international collaboration between (in alphabetical order) Belgium (CSR), China (IHEP, Tsinghua Univ.), Denmark (DNSC, Southern Univ.), France (CESR, APC, ILL, CSNSM, IAP, LAM), Germany (MPE), Ireland (UCD School of Physics), Italy (INAF/IASF Rome, Bologna, Milano, Palermo; INAF/OA Brera, Roma; UNIFE, CNR/IMEM), Poland (NCAC), Portugal (Combra Univ., Evora Univ.), Russia (SINP, MSU, Ioffe Inst.), Spain (IEEC-CSIC-IFAE, CNM-IMB), the Netherlands (SRON, Utrecht Univ.), Turkey (Sabanci Univ.), United Kingdom (Univ. of Southampton, MSSL, RAL, Edinburgh Univ.), and the United States of America (SSL UC Berkeley, Argonne National Lab., MSFC, GSFC, US NRL).

J. Knödseder (✉) · P. von Ballmoos  
Centre d'Étude Spatiale des Rayonnements, UPS/CNRS, B.P. 44346,  
9, avenue du Colonel-Roche, 31028 Toulouse, France  
e-mail: knodlseder@cesr.fr

F. Frontera  
Dipartimento di Fisica, University of Ferrara, Via Saragat, 1, 44100 Ferrara, Italy

A. Bazzano  
INAF-IASF/Rome, Via Fosso del cavaliere 100, 00133 Rome, Italy

F. Christensen  
Danish National Space Center, Juliane Maries Vej 30, 2100 Copenhagen, Denmark

M. Hernanz  
Institut de Ciències de l'Espai (CSIC-IEEC), Campus Universitat Autònoma de Barcelona,  
Facultat de Ciències, Torre C5-parell-2a planta, 08193 Bellaterra (Barcelona), Spain

C. Wunderer  
Space Science Laboratory, UC Berkeley, 7 Gauss Way, Berkeley, CA 94720-7450, USA

using for the first time a focusing lens built of Laue diffracting crystals. The lens will cover an energy band from 200–1,300 keV with an effective area reaching 600 cm<sup>2</sup>. It will be complemented by a single reflection multilayer coated mirror, extending the GRI energy band into the hard X-ray regime, down to ~10 keV. The concentrated photons will be collected by a position sensitive pixelised CZT stack detector. We estimate continuum sensitivities of better than 10<sup>-7</sup> ph cm<sup>-2</sup>s<sup>-1</sup>keV<sup>-1</sup> for a 100 ks exposure; the narrow line sensitivity will be better than 3 × 10<sup>-6</sup> ph cm<sup>-2</sup>s<sup>-1</sup> for the same integration time. As focusing instrument, GRI will have an angular resolution of better than 30 arcsec within a field of view of roughly 5 arcmin—an unprecedented achievement in the gamma-ray domain. Owing to the large focal length of 100 m of the lens and the mirror, the optics and detector will be placed on two separate spacecrafts flying in formation in a high elliptical orbit. R&D work to enable the lens focusing technology and to develop the required focal plane detector is currently underway, financed by ASI, CNES, ESA, and the Spanish Ministry of Education and Science. The GRI mission has been proposed as class M mission for ESAs Cosmic Vision 2015–2025 program. GRI will allow studies of particle acceleration processes and explosion physics in unprecedented detail, providing essential clues on the innermost nature of the most violent and most energetic processes in the universe.

**Keywords** Gamma-ray astronomy · Mission concepts · Crystal lens telescope · Multilayer-coated mirror telescope · Cosmic Vision 2015–2025

## 1 Introduction

Following four years of successful operations, INTEGRAL has significantly changed our vision of the gamma-ray sky [10]. The telescopes aboard the satellite have revealed hundreds of sources of different types, new classes of objects, extraordinary and puzzling views of antimatter annihilation in our galaxy, and fingerprints of recent nucleosynthesis processes. With the wide fields of view of the IBIS and SPI telescopes, INTEGRAL is an exploratory-type mission [11] that allows extensive surveys of the hard X-ray and soft gamma-ray sky, providing a census of the source populations and first-ever all-sky maps in this interesting energy range. The good health of the instruments allows continuing the exploration during the upcoming years, enabling INTEGRAL to provide the most complete and detailed survey ever, which will be a landmark for the discipline throughout the next decades.

Based on the INTEGRAL discoveries and achievements, there is now a growing need to perform more focused studies of the observed phenomena. High-sensitivity investigations of point sources, such as compact objects, pulsars, and active galactic nuclei, should help to uncover their yet poorly understood emission mechanisms. A deep survey of the galactic bulge region with

sufficiently high-angular resolution should shed light on the still mysterious source of positrons. And a sensitivity leap in the domain of gamma-ray lines should allow the detection of nucleosynthesis products in individual supernova events, providing direct insights into the physics of the exploding stars.

Technological advances in the past years in the domain of gamma-ray focusing using Laue diffraction have paved the way towards a new gamma-ray mission that can fulfil these requirements. Laboratory work and balloon campaigns have provided the proof-of-principle for using Laue lenses as focusing devices in gamma-ray telescopes [1, 7–9], and concept studies by CNES and ESA have demonstrated that such an instrument is technically feasible and affordable [3, 6]. Complemented by a hard X-ray telescope based on a single-reflection multilayer coated concentrator, a broad-band energy coverage can be achieved that allows detailed studies of astrophysical sources at unprecedented sensitivity and angular resolution, from  $\sim 10$  keV up to at least 1 MeV.

Bringing our scientific requirements into the context of these technological achievements, we started a common effort to define the scenario for a future gamma-ray mission that we baptised the *gamma-ray imager* (GRI). Figure 1 shows an artists view of the GRI mission deployed in space. The image is based on the GRI mission concept study conducted by Thales Alenia Space in the context of the GRI Cosmic Vision proposal. The GRI mission fits well into the framework of ESA's Cosmic Vision 2015–2025 planning, and it will provide a perfect successor for INTEGRAL in that it will considerably deepen the study of the phenomena unveiled by the observatory.

The exploration of the soft gamma-ray band is complementary to the progress that is presently being made in very high-energy (VHE) gamma-rays by ground based Cherenkov telescopes (such as HESS, MAGIC or VERITAS). The new window opened in the VHE domain resulted so far in more than 50 new sources, mainly belonging to the pulsar wind nebulae, supernova remnant, blazar and microquasar source classes. In addition, AGILE and GLAST will soon provide new vistas of the high-energy gamma-ray sky in the GeV domain. Understanding high-energy emission processes relies heavily on a broad spectral coverage, and combining GRI observations with those achieved at GeV and TeV energies will provide unique constraints on the underlying physics.

## 2 GRI science

Many fundamental questions of modern astrophysics are related to the extremes of our universe: extreme energies that drive powerful stellar explosions and accelerate particles to macroscopic energies, extreme densities that modify the laws of physics around the most compact objects known, and extreme fields that influence the matter in a way that is unexplorable on Earth. The gamma-



**Fig. 1** The GRI mission deployed in space. GRI is composed of two spacecrafts flying in formation at a distance of 100 m. The optics spacecraft (*front*) carries the Laue crystal lens and the multilayer coated single reflection mirror payloads that concentrate incoming hard X-rays and soft gamma-rays onto a focal spot situated 100 m behind the spacecraft. The detector spacecraft (*back*), carrying the detector payload, is placed at the location of the focal spot to collect the concentrated photons

ray imager (GRI) will explore these extremes via focused observations in the hard X-ray and soft gamma-ray bands. For the first time ever in this domain, focusing technologies will be employed to concentrate high-energy photons onto a small focal spot. Focusing will bring the long awaited sensitivity leap, lifting the veil of the extreme universe.

**Cosmic explosions** At the endpoint of stellar evolution, gravity ultimately dominates over energy releases through nuclear fusion, in the case of a massive star leading to a violent explosion. Observing gamma-ray line signatures from radioactive trace isotopes synthesized during such explosions is a powerful means to probe the physical conditions and mechanisms that drive these events. While the collapse of less massive stars into white dwarf remnants is not accompanied by any explosion, the remnants strong gravitational field still has the potential for catastrophic events. Mass accretion onto white dwarfs in a close binary system can lead to thermonuclear explosions at the stars surface, and gamma-ray observations of radioactive trace isotopes synthesized during these explosions tell us about the mixing and convection processes that regulate these events. Eventually, the white dwarf may also be disrupted

catastrophically in a thermonuclear explosion, leading to a bright Type Ia supernova event that can be observed out to considerable distances across the universe. Again, gamma-ray observations of radioactive species that are synthesized in these events will allow us to better understand how these explosions work.


**Cosmic accelerators** The remnants of stellar explosions are powerful sites of particle acceleration. Rapidly rotating magnetized neutron stars left over by the core collapse of massive stars manifest themselves as pulsars that directly accelerate particles by their huge electric fields. Where and how this acceleration process operates is still unclear and will be revealed by gamma-ray observations. In particular, gamma-ray timing and polarization measurements provide unique tools to assess the geometry and location of the particle acceleration site. Shock waves generated by the expanding supernova remnants accelerate particles in a slow but continuous process to extreme energies, and are thought to produce the bulk of cosmic radiation contained in the galaxy. Soft gamma-ray observations of supernova remnants probe the low-energy part of the acceleration process, and are able to unveil the injection mechanism of particles into the shock front. Compact stellar remnants in binary systems, such as neutron stars or black holes, are another important acceleration site, where a fraction of the matter that is accreted by the strong gravitational field is accelerated into collimated relativistic jets. Active galactic nuclei with their super massive black holes are scaled-up versions of the same nature. Gamma-rays probe the innermost regions of the accreting systems that are not accessible in other wavebands, providing the closest view to the acceleration engine. Time variability and polarization studies provide important insights into the physical processes and the geometry that govern the acceleration site. And the observation of characteristic nuclear and/or annihilation line features may help to settle the question about the nature of the accelerated plasma. Positron production potentially occurs in a variety of cosmic explosion and acceleration sites, and the observation of the characteristic 511 keV annihilation line signature and the accompanying three-photon continuum provides a powerful tool to probe plasma composition, temperature, density and ionisation degree. The positron annihilation signature is readily observed from the galactic bulge region yet the origin of the positrons remains mysterious. By searching for such signatures in a variety of objects, GRI not only will constrain their physical conditions, but may also provide the key to the understanding of the galactic positron origin. Last but not least, annihilation of light dark matter has been proposed as possible origin of the galactic positrons. Although highly speculative, the importance of identifying the nature of dark matter justifies the search for observational signatures in all wavelength domains. The gamma-ray domain is here unique, in the sense that it allows the observation of the annihilation of the lightest charged leptons that should be at the endpoint of any annihilation process. By the observation of nearby dwarf galaxies that are rich in dark matter, GRI can provide important constraints on the viability of the light dark matter scenario.

The main science questions that GRI will address and that drive the mission design are:

- **How do supernovae explode?** GRI will measure gamma-ray line and continuum light curves and line shapes of radioactive decay products in thermonuclear explosions. This will unveil the Type Ia supernova explosion mechanisms and provides the key to understand the variety of the SN Ia phenomena. Furthermore, the GRI observations will provide a calibration of the SN Ia luminosities as required for accurate measurements of the cosmic acceleration.
- **What is the origin of the soft gamma-ray background radiation?** GRI will determine the spectral properties of accretion and jet dominated AGN (continuum shapes, cut-off energies). The characterisation of AGN high-energy spectra will constrain their contributions to the cosmic background radiation, and will probe their radiation physics.
- **What links jet ejection to accretion in black hole and neutron star systems?** GRI will measure spectral properties during state transitions, determine the polarization of the emission, and search for annihilation signatures. These measurements will reveal how the state transitions are triggered. Furthermore they will constrain the system geometries, and determine the nature of the emitting hot plasma.
- **How are particles accelerated to extreme energies in the strongest magnetic fields?** GRI will perform phase resolved spectroscopy of pulsars and determine the polarization of the high-energy emission, constraining thus the geometry of pulsar magnetosphere. Moreover, GRI will measure the spectral properties of magnetars, determining their acceleration physics and probing QED effects in the strongest known magnetic fields.

In addition to these main objectives, GRI will also detect radioactive decay products in nearby novae or young supernova remnants, constraining their nucleosynthesis and stellar physics. Positron–electron annihilation signatures constitute an important diagnostics tool of particle populations that GRI will search for in a variety of objects such as galactic compact objects, pulsars, supernovae and supernova remnants. Particle acceleration phenomena can further be studied in supernova remnants, galaxy clusters, and gamma-ray bursts. And GRI also has the potential to constrain or even detect the products of dark matter annihilation and/or decay.

Figure 2 shows four science simulations for GRI. The upper left panel shows the observed spectrum for thermonuclear supernovae (SN Ia) at distances of 10 and 20 Mpc for an observing time of 1 Ms. A delayed detonation model has been assumed and the spectra have been simulated for 90 days after the explosion where the gamma-ray line intensities are at maximum. The most important lines arise from the radioactive decay of  $^{56}\text{Ni}$  and  $^{56}\text{Co}$ , and from electron–positron annihilation, and all of them can be clearly distinguished by GRI. GRI will measure such spectra for about 5 events per year.

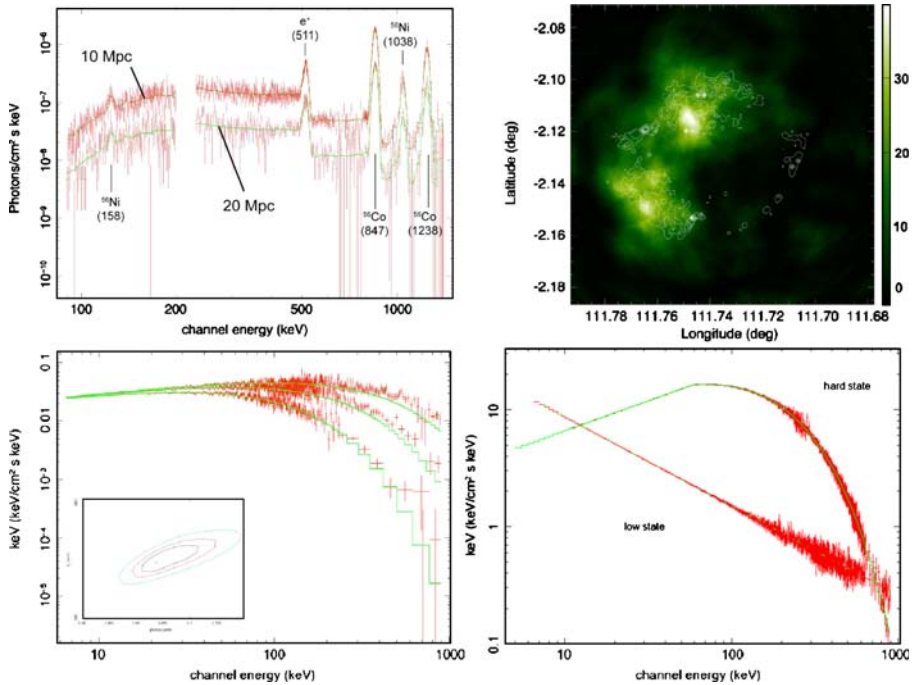

**Fig. 2** GRI science simulations: *upper left* type Ia supernova spectra obtained for events at 10 Mpc and at 20 Mpc, respectively. *Upper right* image of the (assumed) spatial distribution of  $^{44}\text{Ti}$  in the Cas A supernova remnant. *Lower left* AGN spectra for different cut-off energies. *Lower right* binary spectrum

The upper right panel shows the image that GRI will obtain for a 1 Ms observation of the Cas A supernova remnant in the 68 keV decay line of  $^{44}\text{Ti}$ . The observation has been simulated by assuming that the  $^{44}\text{Ti}$  is distributed similar to Si, as mapped by Chandra observations (white contours). The simulated deconvolution demonstrates that GRI's multilayer mirror is capable of localising the radioactive material in the supernova remnant, providing important insights into the dynamics and symmetry of the explosion that took place 320 years ago!


The lower left panel shows Seyfert spectra with different cut-off energies for a flux of 3 mCrab in the 2–10 keV energy range. The simulation clearly demonstrates the GRI capability to measure the high energy cut-off up to highest energies with unprecedented accuracy in a 100 ks observation, crucial to determine the contribution of these objects to the extragalactic diffuse background.

The lower right shows a 100 ks exposure of a black-hole system in the two canonical states (soft and hard). The soft state spectra has been based on GRO J1655-40 while the hard state spectrum is that of GRO J0422+32. GRI will be able measure these spectra with unprecedented details to above 1 MeV.

### 3 GRI mission

#### 3.1 Mission profile

The GRI mission is composed of two spacecrafts that will be launched by a single Soyuz-Fregate-2B launch from Kourou. The optics spacecraft (OSC) carries a multilayer coated single-reflection mirror and a Laue crystal lens that focus incoming gamma-rays onto a focal spot situated at a distance of 100 m. The detector spacecraft (DSC) carries a position sensitive detector, and will be placed in the focal spot to collect the concentrated gamma-rays. Figure 3 illustrates the GRI mission profile. Both satellites will be launched stacked in a circular 300 km parking orbit (a similar to the configuration that has been proposed and validated for the Simbol-X and XEUS missions). The heavier OSC will be placed at the bottom, and will be supported by the Soyuz-Fregate standard adapter (1194-SF). The lighter DSC will be placed on top of the OSC. For this purpose the OSC is equipped with a support cone with a DSC interface diameter of 937 mm. With an overall mass budget of 2,340 kg, and including the necessary S/C adapter, the GRI total launch mass (including margins)

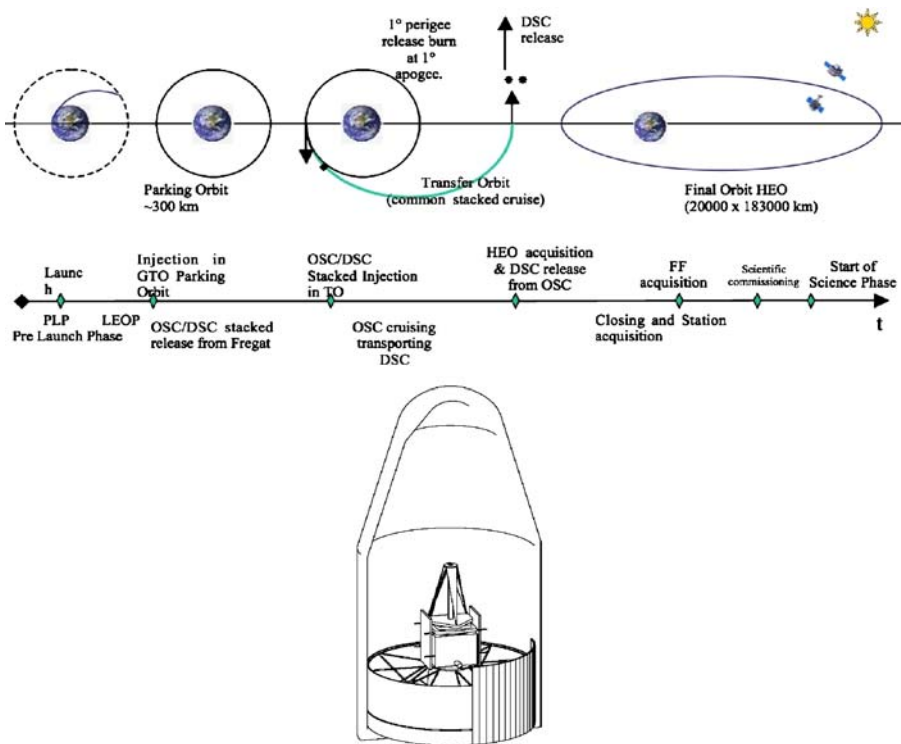

**Fig. 3** GRI mission profile (*left*) and launch configuration (*right*)



amounts to 2,327 kg, leaving a performance margin of 13 kg with respect to the launcher performances.

Using the OSC propulsion system, the satellites are then injected stacked into a transfer orbit to reach a final highly eccentric orbit (HEO). A HEO operational orbit with perigee between 15,000 and 20,000 km provides the best conditions for mission maintenance, formation flying control, ground station link as well as scientific efficiency. The apogee of the orbit will be at 183,000 km, leading to a revolution period of 4 days (the orbit is identical to that proposed and validated for the Simbol-X mission). Once in final orbit, both satellites will be separated, acquire the Sun, and put into formation. After a scientific commissioning phase, a science phase of 3 + 1 years will follow.


### 3.2 Optics spacecraft

For the optics spacecraft (OSC) we propose a specific satellite development that aims in the maximization of the surface area usable for the collection of gamma-rays, while satisfying the launch and operational constraints of the GRI mission. A specific OSC design study in the context of the Cosmic Vision proposal has been performed by TAS-I Turin. While the OSC requires a dedicated solution, the S/C can be equipped with standard equipment at sub-system level, with advantages in terms of cost and reliability. The OSC preliminary design concept is based on XEUS heritage for the wheel geometry and truss support structure. It consists of a thrust cone, four equipment radius, four stiffening radius, eight sets of reinforcement rods and an external cylindrically drum to close the load flux (cf. Fig. 4). The thrust cone reaches from the launcher interface ring through the OSC to the DSC interface ring, allowing for the launch of both S/C in a stacked configuration. The four equipment radius host the main S/C sub-systems.

In order to have the electrical power generation compatible with the constraints of the OSC geometry, a system based on solar photovoltaic cells mounted on the OSC drum has been considered. The cells have been sized for a Sun aspect angles of  $\pm 20^\circ$ . To allow also larger solar aspect angles, required for the survey of supernovae, a specific mode has been considered where all systems are powered from battery with autonomy of 2–3 h. In this case, the solar aspect angle can be extended to  $\pm 80^\circ$ .

### 3.3 Detector spacecraft

For the detector spacecraft (DSC) we propose the utilization of the TAS-F PROTEUS satellite, a multi-purpose platform developed for the so-called mini satellites family that is flight proven with the successful launch of the JASON-1 and COROT satellites. The use of the qualified PROTEUS platform for GRI leads to reduced risks, cost minimization, and simplifies the qualification and AIT sequence. The robust and reliable PROTEUS structure is composed of an aluminium rod assembly forming a cube (1 m long) stiffened by sandwich

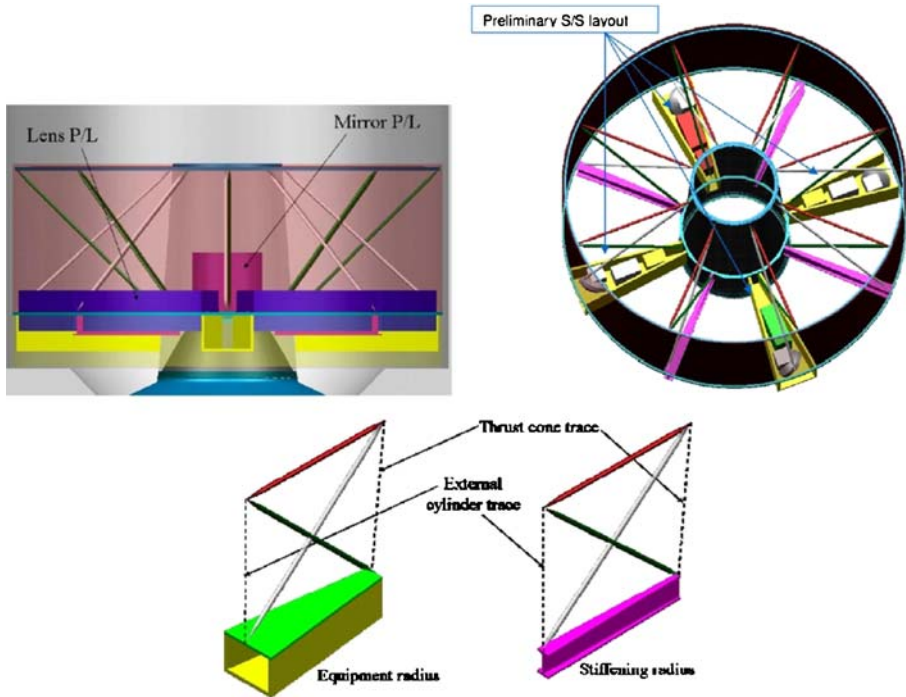


**Fig. 4** Overview over the OSC design. *From left to right* OSC configuration, preliminary sub-systems layout, and radius

panels. It acts as primary structure and guarantees the transfer of main loads from payload to launcher through a fully machined aluminium frame. The PROTEUS structure was qualified on former programs for payloads up to 300 kg and is thus fully compliant with the payload mass of 120 kg. The payload telemetry of 120 kbps is compatible with the PROTEUS standard capability (Fig. 5).

### 3.4 Formation flying metrology

The GRI telescope is split into two satellites: the OSC carrying the lens and the mirror and the DSC maintains actively an accurate formation flight (position and orientation) with respect to the OSC at the focal length of 100 m. For the observation, the formation flight maintains an inertial pointing towards the source, requiring an absolute accuracy of 10 arcsec. The OSC is in charge of controlling its attitude using Reaction Wheels, which are unloaded by the chemical propulsion system. The precision of the star trackers will allow to determine the effective OSC pointing to an accuracy of 3 arcsec.

The GRI formation flying control is based on the relative position measurement performed by the metrology devices. On the basis of the measured relative OSC/DSC position, the dedicated software of the DSC onboard

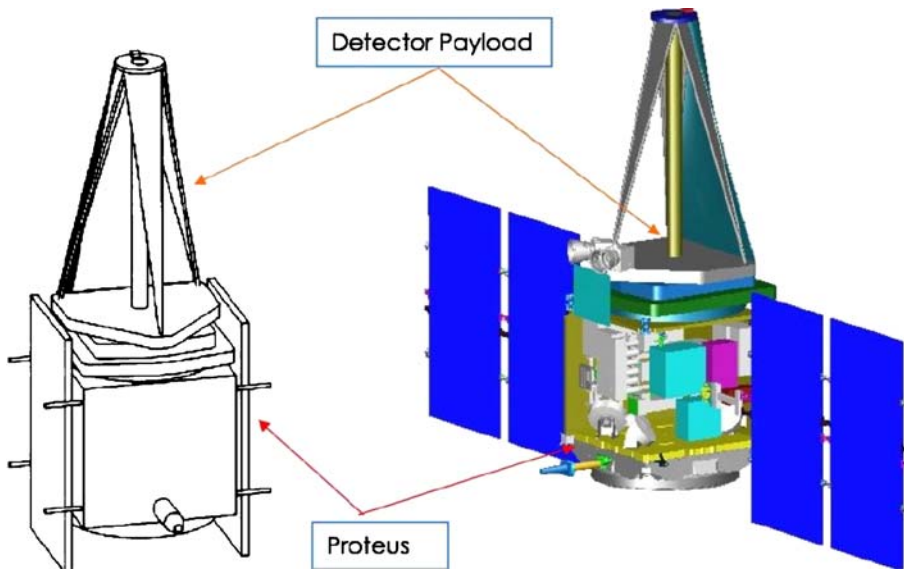

**Fig. 5** DSC with integrated payload

computer elaborates the alignment and attitude errors to be compensated by the means of cold gas thrusters.

Reorientation to a new science target is performed by slewing the OSC and translating and slewing the DSC in order to maintain its focal position.

Two types of metrology systems are foreseen: RF metrology and optical metrology. Both systems have been developed by THALES-ALENIA Space—the relatively weak requirements of the GRI mission leave generous performance margins on these systems.

## 4 GRI payloads

The GRI payload is composed of a Laue crystal lens, a multilayer-coated single-reflection mirror and a focal plane detector. The lens and the mirror are placed on the OSC while the focal plane detector is placed on the detector spacecraft DSC.

### 4.1 Laue lens payload


The Laue lens payload consists of a broad-band gamma-ray lens based on the principle of Laue diffraction of photons in mosaic crystals. Each crystal can be considered as a little mirror which deviates gamma-rays through Bragg reflection from the incident beam onto a focal spot. Although the Bragg relation  $2d \sin \theta = nhc/E$  implies that only a single energy  $E$  (and its multiples)

can be diffracted by a given crystal, the mosaic spread  $\Delta\theta$  that occurs in each crystal leads to an energy spread  $\Delta E \propto (\Delta\theta) E^2$  ( $d$  is the crystal lattice spacing,  $\theta$  the Bragg angle,  $n$  the diffraction order,  $h$  the Planck constant,  $c$  the speed of light and  $E$  the energy of the incident photon).

Placing the crystals on concentric rings around an optical axis, and the careful selection of the inclination angle on each of the rings, allows then to build a broad-band gamma-ray lens that has continuous energy coverage over a specified band. Since large energies  $E_1$  imply smaller diffraction angles  $\theta$ , crystals diffracting large energies are located on the inner rings of the lens. Conversely, smaller energies  $E_2$  imply larger diffraction angles and consequently the corresponding crystals are located on the outer rings.

The lens payload consists of a set of eight petals, each of which is interfacing at three points with the OSC (one point on the thrust cone, one on an equipment radius and one on a stiffening radius). This concept (illustrated in Fig. 6) is inspired from the XEUS MSC design, and allows a good lens payload modularity, with advantages in terms of feasibility, testability and production. Each petal has an opening angle of  $36.4^\circ$  and a length of 121 cm, and is composed of a SiC frame and support structure. Each petal will be divided into 22 sub-sectors that hold the crystal modules. Two options for the assembly of crystals on these modules are currently under study in dedicated industrial studies (CNES funded: contractor TAS-F Cannes; ESA funded: contractor TAS-I Milano).

**Fig. 6** Overview over the lens payload

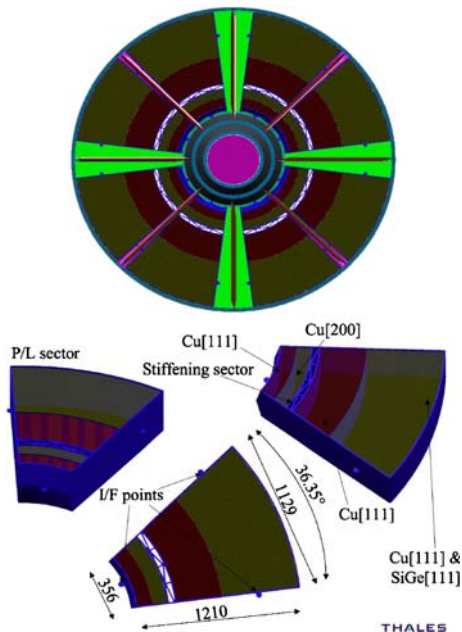

## 4.2 Multilayer coated mirror

The payload consists of a multilayer coated single reflection mirror that acts as a concentrator for hard X-rays comprised in the energy band from 10 to 300 keV. We propose to use the high performance Si-pore optics developed by ESA within the XEUS mission concept to realize a light-weight mirror substrate [2]. Onto this substrate, depth graded multilayer coatings will be applied which act as broad band Bragg reflectors [5]. The basic principle of the mirror is very analogous to the principle used for the Laue lens payload, making use of the Bragg relation. Instead of using crystalline planes, however, the mirror employs depth graded multilayer coatings.


The mirror design is based on nested pore optics similar to that proposed for XEUS. With respect to the XEUS mission, however, the GRI mirror is significantly simplified. Firstly, instead of an approximated Wolter geometry only a single reflection is used, leading to a simple concentrator with relaxed alignment constraints. Secondly, the mirror dimensions are much smaller than those foreseen for XEUS, leading to a simplified petal design providing less obscuration and simplified mounting. Thirdly, the imaging capabilities are relaxed to 10 arcsec instead of the XEUS goal of 2 arcsec, relaxing further the precision requirements for the optics.

The mirror module consists of 86 petal units. Each of these X-ray optical units (XOUs) needs to be aligned independently and is mounted together by special CeSiC brackets allowing for this alignment. Due to the fixed spacing of the Si wafers the inner shells need to be longer to make an effective use of the aperture. It is thus required to align several XOUs to the required precision along the optical axis. This petal structure is schematically shown in Fig. 7.

## 4.3 Detector

As baseline for the GRI focal plane detector, we propose a pixel CZT detector operating at room temperature that combines high detection efficiency, good spatial and good spectral resolution [4]. Instead of CZT crystals the usage of CdTe crystals could be envisioned for more effective signal compensation or improved spectroscopic performance, e.g. by the use of p-i-n contacts.

**Fig. 7** Schematic representation of the mirror payload

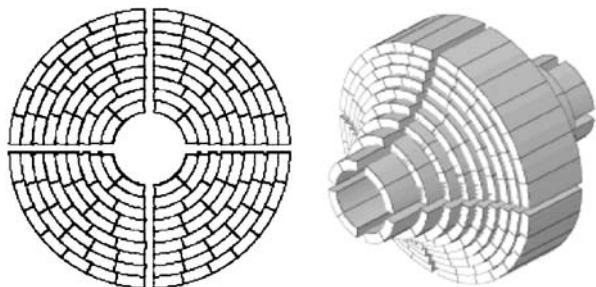


Alternatively, a cooled high-purity Ge strip detector could provide an improved spectral resolution and better background rejection capabilities that potentially increase the scientific performances of GRI [12]. However, the Ge detector option implies active cooling and eventually detector annealing cycles that increase the complexity of the payload.

The GRI focal plane baseline detector is based on a position sensitive spectrometer made of 4 stacked CZT layers, surrounded by CZT side walls. The stack is composed of a 5 mm thick top layer, optimized for photoelectric absorption in the 10–250 keV band, and three bottom layers, each one 20 mm thick, to grant a total detection efficiency of better than 75% for photons below 1 MeV. In our preliminary design, the top layer is composed of 129 CZT crystals divided into 33024 pixels of  $0.8 \times 0.8 \text{ mm}^2$  in size. Each of the (identical) bottom layers is composed of 688 CZT crystals divided into 8,384 pixels of  $1.6 \times 1.6 \text{ mm}^2$  in size. The crystals of the bottom layers are placed vertically, so that the interaction path for the photons amounts to 20 mm within a single crystal. In contrast to the top layer, that is biased in planar field configuration, the crystals of the bottom layers are biased in planar transverse field (PTF) configuration, resulting in small charge collection lengths of 1.6 mm, granting a good spectral resolution. The detector stack is directly exposed to the source photons focused by the lens and mirror optics, while the side wall detectors are used to collect scattered photons from the primary beam in order to maximize the full energy absorption efficiency. In our preliminary design, the side walls are made of 1344 CZT crystals divided into 4,032 pixels of  $6.4 \times 6.4 \text{ mm}^2$  in size. The side wall has a thickness of 10 mm, and the crystals are again biased in PTF configuration. The entire detector is surrounded by a segmented veto shield made of 44 BGO modules (thickness 10 mm), which are read out through optically coupled new generation photomultiplier tubes (PMTs). On top of the detector, a baffle made of a sandwich of materials with decreasing Z (e.g. W, Sn, Cu) will allow an efficient reduction of the diffuse cosmic background for energies up to 100 keV.

Figure 8 shows the preliminary design of the GRI detector payload. The high detector segmentation will allow on the one hand for precise localisation of the photon interaction locations and for Compton polarimetry, and on the other hand for effective background rejection exploiting Compton kinematics event reconstruction techniques. Our preliminary detector design consists of 62208 individual CZT pixels and 44 PMTs.

Each CZT pixel, grouped in homogeneous families according to position, will be read out individually using a low-power charge pre-amplifier coupled through a multiplexing unit to a flash ADC. This functionality should be integrated into dedicated multichannel ASICs. The ASIC outputs will be collected in the instrument control unit (ICU) where a FPGA based digital processing unit provides the event characterisation (total energy deposit, interaction position, time tagging and coincidence analysis for Compton kinematics reconstructions and polarimetry analysis). The onboard event processing will lead to a significant data reduction that allows to minimize the telemetry downlink rate.


**Fig. 8** Schematic representation of the detector payload

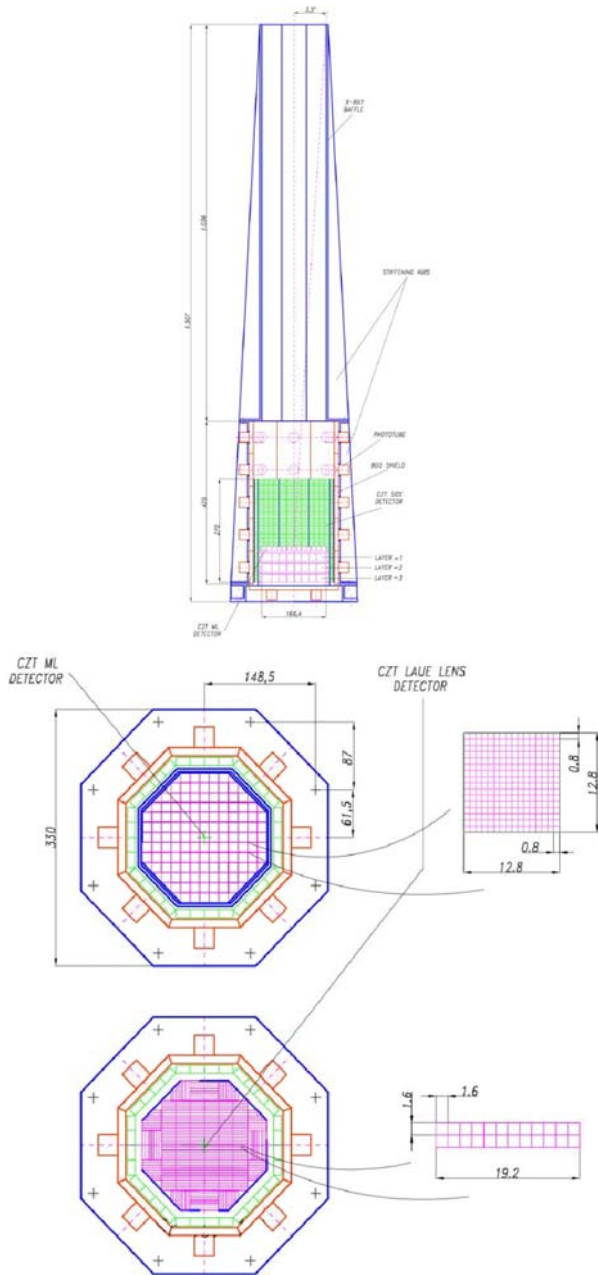

#### 4.4 Performance assessment

The lens and mirror payload performances have been evaluated by dedicated simulation software based on ray tracing techniques. The critical performance

**Fig. 9** Expected GRI performances. *Blue lines* indicate the performances of the multilayer coated mirror, *red lines* give the performances of the Laue lens, and *green lines* indicate the mission requirements. *Top-left* effective area as function of energy. *Top-right* assumed instrumental background rate as function of energy. *Bottom-left*  $3\sigma$  continuum detection sensitivity for an exposure time of 100 ks and  $\Delta E/E = 1/2$ . *Bottom-right*  $3\sigma$  narrow line detection sensitivity for an exposure time of 100 ks and  $\Delta E/E = 3\%$

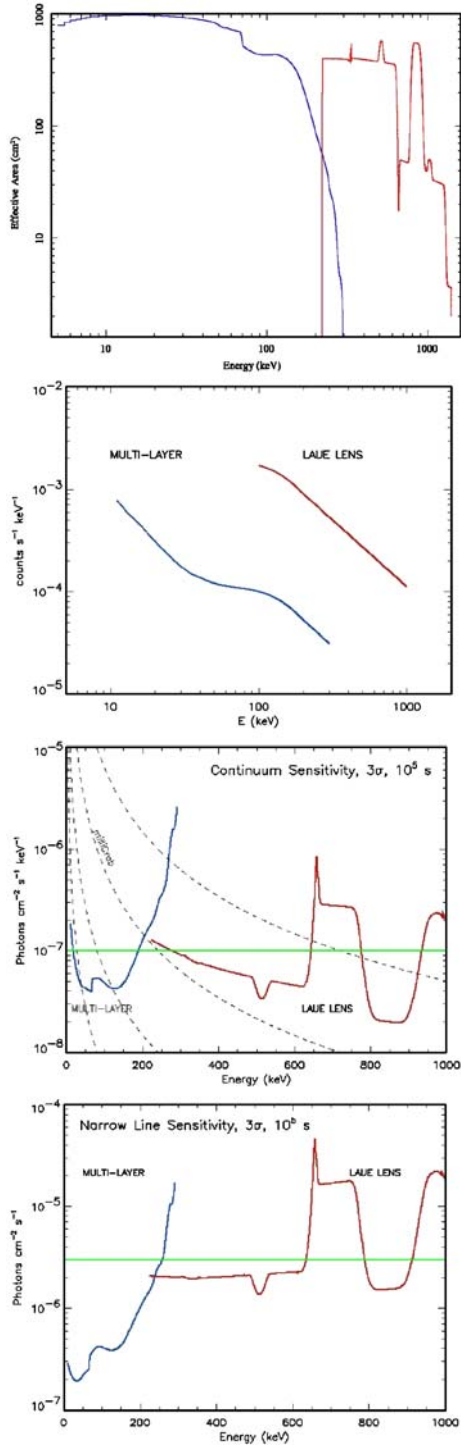



parameters for these payloads are the expected effective area and focal spot characteristics as function of energy. For the detector payload, the most critical properties are the instrumental background and detection efficiency (which is limiting the sensitivity) and the spectral resolution (which is limiting the energy resolution). The instrumental background rates for GRI have been estimated using the measured background for the IBIS/ISGRI detector, reduced by a factor of 4 as result of a better shielding and a lighter spacecraft mass (this shielding improvement is justified by the improvement achieved on INTEGRAL/SPI with the active BGO shield). The relevant background rates depend on the focal spot size on the detector. For a mirror HPD of 10 arcsec a focal spot size of  $0.2 \text{ cm}^2$  is expected, resulting in an active detector volume of  $0.1 \text{ cm}^3$ . For a lens HPD of 30 arcsec a focal spot size of  $3.2 \text{ cm}^2$  is expected, resulting in an active detector volume of  $21 \text{ cm}^3$ . The expected GRI performances are summarized in Fig. 9.

## 5 Conclusions

The gamma-ray band presents a unique astronomical window that allows the study of the most energetic and most violent phenomena in our universe. With ESA's INTEGRAL observatory, an unprecedented global survey of the soft gamma-ray sky is currently performed, revealing hundreds of sources of different kinds, new classes of objects, extraordinary views of antimatter annihilation in our galaxy, and fingerprints of recent nucleosynthesis processes. While INTEGRAL provides the longly awaited global overview over the soft gamma-ray sky, there is a growing need to perform deeper, more focused investigations of gamma-ray sources, comparable to the step that has been taken in X-rays by going from the EINSTEIN satellite to the more focused XMM-Newton observatory.

Technological advances in the past years in the domain of gamma-ray focusing using Laue diffraction techniques have paved the way towards a future gamma-ray mission, that will outreach past missions by large factors in sensitivity and angular resolution. Complemented by a hard X-ray telescope based on a single-reflection multilayer coated concentrator, a broad-band energy coverage can be achieved that allows detailed studies of astrophysical sources at unprecedented sensitivity and angular resolution, from  $\sim 10 \text{ keV}$  up to at least  $1 \text{ MeV}$ . We have developed a mission concept, named the *gamma-ray imager*, that combines both technologies in a promising new observatory. Industry studies, conducted primarily by Thales Alenia Space and COSINE, have demonstrated the feasibility of the GRI concept. GRI is composed of two spacecrafts that will be launched by a single Soyuz Fregate-2B launch from Kourou. The optics spacecraft (OSC) carries the multilayer coated single-reflection mirror and the Laue crystal lens that focus incoming gamma-rays onto a focal spot situated at a distance of 100 m. The detector spacecraft (DSC) carries the position sensitive detector, and will be placed in the focal spot to collect the concentrated gamma-rays. The estimated continuum sensitivity

is better than  $10^{-7}$  ph cm $^{-2}$ s $^{-1}$ keV $^{-1}$  for a 100 ks exposure; the narrow line sensitivity will be better than  $3 \times 10^{-6}$  ph cm $^{-2}$ s $^{-1}$  for the same integration time. These sensitivities may be compared to those achieved today by INTEGRAL for the same exposure times:  $3 \times 10^{-6}$  ph cm $^{-2}$ s $^{-1}$ keV $^{-1}$  at 100 keV (ISGRI) and  $1 \times 10^{-4}$  ph cm $^{-2}$ s $^{-1}$  at 847 keV (SPI). With these unprecedented performances, a factor of more than 30 better than existing mission, GRI will allow to study particle acceleration processes and explosion physics in unprecedented depth, providing essential clues on the intimate nature of the most violent and most energetic processes in the universe.

## References

1. Barrière, N., von Ballmoos, P., Bastie, P., et al.: Second generation crystals for Laue lens applications. *Proc. SPIE* **6266**, 70–78 (2006)
2. Beijersbergen, M., Kraft, S., Bavdaz, M., et al.: Development of X-ray pore optics: novel high-resolution silicon millipore optics for XEUS and ultralow mass glass micropore optics for imaging and timing. *Proc. SPIE* **5539**, 104–115 (2004)
3. Brown, C.: GRL Technology Reference Study Final Report. ESA SCI-A/2005/058/GRL/CB (2005)
4. Caroli, E., Auricchio, N., Bertuccio, G., et al.: A focal plane detector design for a wide band Laue-lens telescope. *Proc. SPIE* **6266**, 67–78 (2006)
5. Christensen, F.E., Jensen, C.P., Madsen, K.K., et al.: Novel multilayer designs for future hard X-ray missions. *Proc. SPIE* **6266**, 28–40 (2006)
6. Duchon, P.: MAX: formation flying for nuclear astrophysics. *Exp. Astron.* **20**, 483–495 (2005)
7. Frontera, F., Pisa, A., Carassiti, V., et al.: Gamma-ray lens development status for a European gamma-ray imager. *Proc. SPIE* **6266**, 64–75 (2006)
8. Halloin, H., von Ballmoos, P., Evrard, J., et al.: CLAIRE gamma-ray lens: flight and long-distance test results. *Proc. SPIE* **5168**, 471–481 (2004)
9. von Ballmoos, P., Halloin, H., Paul, J., et al.: The MAX Mission: focusing on high-sensitivity gamma-ray spectroscopy. In: *Proc. 5th INTEGRAL Workshop, Munich 16–20 February 2004*, ESA SP-552, pp. 747–753 (2004)
10. Winkler, C.: Scientific highlights from INTEGRAL. *New Astron. Rev.* **50**, 530–533 (2006)
11. Winkler, C., Courvoisier, T.J.-L., DiCocco, G., et al.: The INTEGRAL mission. *A&A* **411**, L1 (2003)
12. Wunderer, C.B., Weidenspointner, G., Zoglauer, A., et al.: Germanium (Compton) focal plane detectors for gamma-ray lenses. *Proc. SPIE* **6266**, 66–77 (2006)