

## Erratum to: Wear Debris Mobility, Aligned Surface Roughness, and the Low Wear Behavior of Filled Polytetrafluoroethylene

Kathryn L. Harris<sup>1</sup> · John F. Curry<sup>2</sup> · Angela A. Pitenis<sup>3</sup> · Kyle G. Rowe<sup>3</sup> · Mark A. Sidebottom<sup>2</sup> · W. Gregory Sawyer<sup>1,3</sup> · Brandon A. Krick<sup>2</sup>

Published online: 9 October 2015  
© Springer Science+Business Media New York 2015

**Erratum to: Tribol Lett (2015) 60:2**  
**DOI 10.1007/s11249-015-0581-7**

Owing to an unfortunate error during the production process, the original article was published with an incorrect version of Fig. 4, which is corrected with this erratum. The original publication has also been updated.

The corrected Fig. 4 and its caption are given below:

---

The online version of the original article can be found under doi:[10.1007/s11249-015-0581-7](https://doi.org/10.1007/s11249-015-0581-7).


---

✉ Brandon A. Krick  
bakrick@lehigh.edu

<sup>1</sup> Department of Materials Science and Engineering, University of Florida, Gainesville, FL 32611, USA

<sup>2</sup> Department of Mechanical Engineering and Mechanics, Lehigh University, Bethlehem, PA 18015, USA

<sup>3</sup> Department of Mechanical and Aerospace Engineering, University of Florida, Gainesville, FL 32611, USA

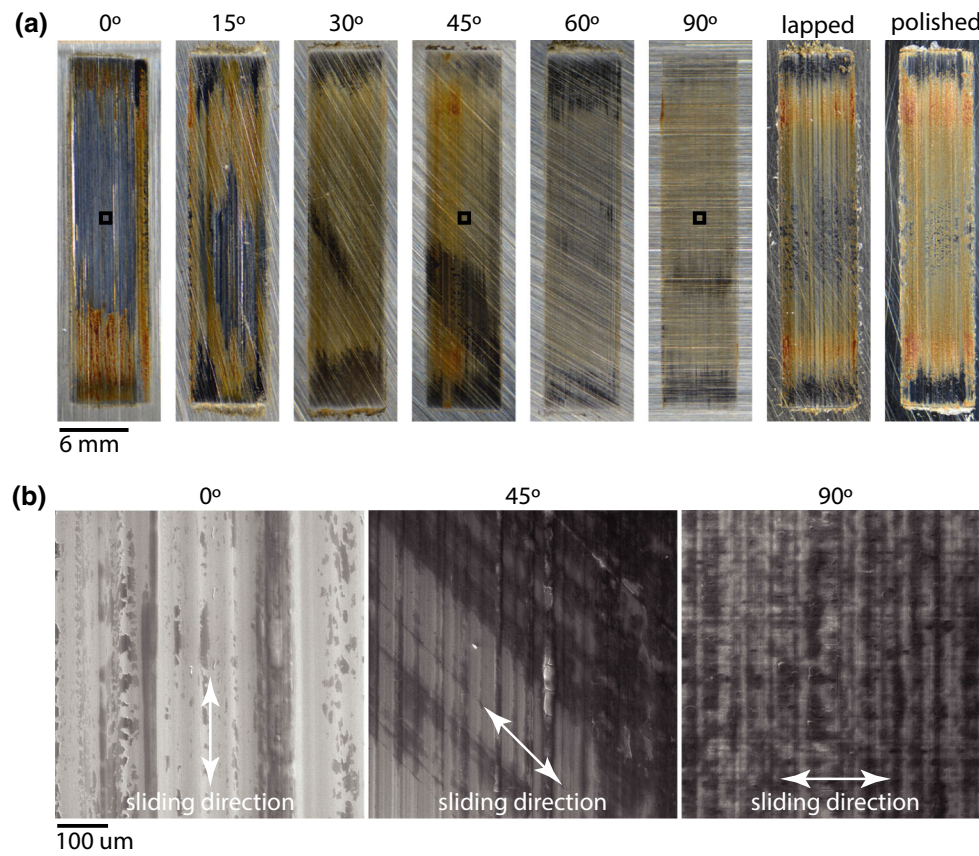

**Fig. 4** Transfer films. **a** Optical images of transfer films for each countersample. **b** Scanning electron micrographs of the 0°, 45° and 90° wear tracks. The transfer films are visibly more continuous and uniform as the roughness angle approaches 90°