



Correction to: Printed flexible bifunctional electrochemical urea-pH sensor based on multiwalled carbon nanotube/polyaniline electronic ink

Qiwen Bao¹ · Zhengchun Yang¹ · Yanfei Song¹ · Meiyong Fan¹ · Peng Pan¹ · Jun Liu¹ · Zhenyu Liao^{2,3} · Jun Wei^{1,4}

Published online: 22 February 2019

© Springer Science+Business Media, LLC, part of Springer Nature 2019

Correction to:

Journal of Materials Science: Materials in Electronics
<https://doi.org/10.1007/s10854-018-0447-5>

The correct results of Fig. 7a, b and c is showed as follows.

In the original version of this article, Fig. 7a, b and c was unfortunately displayed incorrectly.

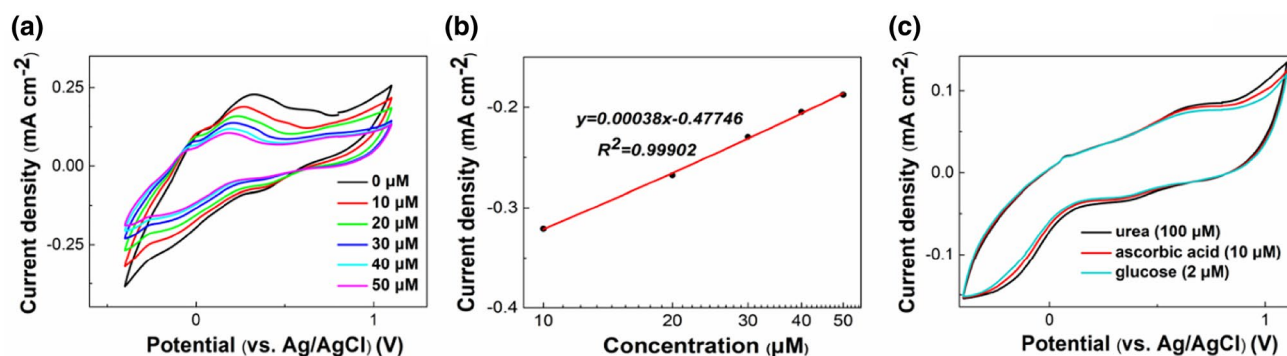


Fig. 7 a I - V responses of MWCNT/PANi-composite-modified SPCE at urea concentration range of 10–50 μM and scan rate of 50 mV s^{-1} . b Corresponding calibration curve. c I - V

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

The original article can be found online at <https://doi.org/10.1007/s10854-018-0447-5>.

✉ Peng Pan
panpeny@163.com

✉ Jun Liu
cloudlj@163.com

✉ Zhenyu Liao
liaozy08@163.com

² Pony Testing International Group, Tianjin 300110, China

³ Tianjin Food Safety Inspection Technology Institute, Tianjin 300308, China

⁴ Singapore Institute of Manufacturing Technology, Agency for Science, Technology and Research (A*STAR), 71 Nanyang Drive, Singapore 638075, Singapore

¹ School of Electrical and Electronic Engineering, Tianjin Key Laboratory of Film Electronic & Communication Devices, Advanced Materials and Printed Electronics Center, Tianjin University of Technology, Tianjin 300384, China