## Erratum: 'A copper HyBrID laser of 120W average output power and 2.2% efficiency'

D. R. JONES, A. MAITLAND and C. E. LITTLE, *Optical and Quantum Electronics* **25** (1993) 261.

On page 268, Figure 5 should appear as:

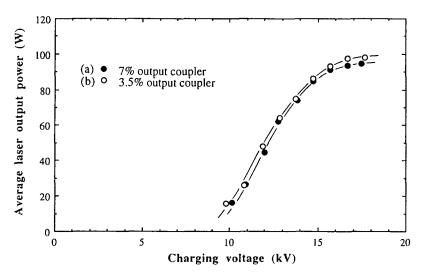


Figure 5 The dependence of laser output power on charging voltage for configuration (a), a 7% reflecting output coupler, and configuration (b), a 3.5% reflecting output coupler. The window reflection losses at each end were about 7% (neglecting interference effects). Laser operating parameters were as described for Fig. 3.