

- [11] Kruse D, Wen J T, Radke R J. A sensor-based dual-arm tele-robotic system. *IEEE Transactions on Automation Science and Engineering*, 2015, **12**, 4–18.
- [12] Hacıoglu Y, Arslan Y Z, Yagiz N. MIMO fuzzy sliding mode controlled dual arm robot in load transportation. *Journal of the Franklin Institute*, 2011, **348**, 1886–1902.
- [13] Sun D, Mills J K. Adaptive synchronized control for coordination of multirobot assembly tasks. *IEEE Transactions on Robotics and Automation*, 2002, **18**, 498–510.
- [14] Florin A, Silvia A. Synchronizing robot motions in cooperative tasks. *Control Engineering and Applied Informatics*, 2011, **13**, 43–48.
- [15] Likar N, Nemec B, Zlajpah L. Virtual mechanism approach for dual-arm manipulation. *Robotica*, 2013, 1–16.
- [16] Wimböck T, Ott C. *Dual-Arm Manipulation*, Springer, Verlag Berlin Heidelberg, 2012, **76**, 353–366
- [17] Heck D, Kostić D, Denasi A, Nijmeijer H. Internal and external force-based impedance control for cooperative manipulation. *European Control Conference*, Zürich, Switzerland, 2013, 2299–2304.
- [18] Lee J, Chang P H, Jamisola R S. Relative impedance control for dual-arm robots performing asymmetric bimanual tasks. *IEEE Transactions on Industrial Electronics*, 2014, **61**, 3786–3796.
- [19] Nakanishi J, Cory R, Mistry M, Peters J, Schaal S. Operational space control: A theoretical and empirical comparison. *The International Journal of Robotics Research*, 2008, **27**, 737–757.
- [20] Tao J M, Luh J Y S. Coordination of two redundant robots. *IEEE International Conference on Robotics and Automation*, Scottsdale, Amercia, 1989, **1**, 425–430.
- [21] Denavit J, Hartenberg R S. A kinematic notation for lower-pair mechanisms based on matrices. *Journal of Applied Mechanics*, 1965, **22**, 215–221.
- [22] Fitzgerald C. Developing Baxter: A new industrial robot with common sense for U.S. manufacturing. *IEEE International Conference on Technologies for Practical Robot Applications*, Woburn, America, 2013, 1–6.

Erratum to: “Design and Experiment on a Biomimetic Robotic Fish Inspired by Freshwater Stingray” [*Journal of Bionic Engineering*, 2015, 12, 204–216]

In Fig. 10 (page 211) of the above paper, the label of the vertical axes “ $F_x(\text{mN})$ ” of all three figures is incorrect. The correct label is “ $V(\text{cm}\cdot\text{s}^{-1})$ ”, and Fig. 10 should be replaced by the following one.

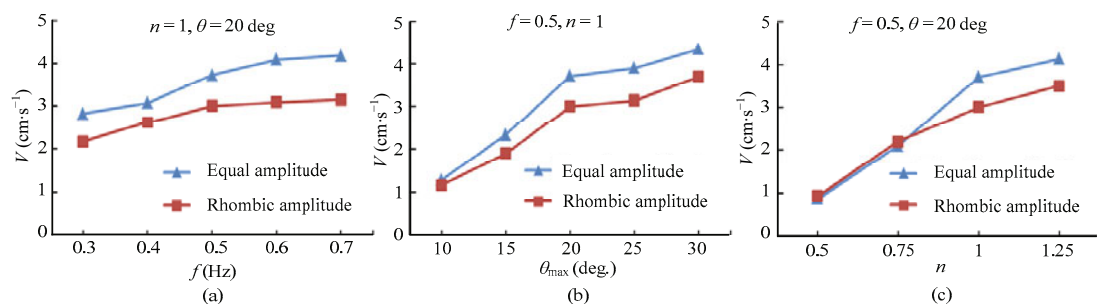


Fig. 10 Swimming velocities as functions of frequency (a), maximum angular deflection (b), and wave number (c).