


Erratum to: High-performance, continuous-wave quantum-cascade lasers operating up to 85°C at $\lambda \sim 8.8 \mu\text{m}$

J.S. Yu · S. Slivken · A. Evans · M. Razeghi

Published online: 13 July 2010
© Springer-Verlag 2010

Erratum to: Appl Phys A (2008) 93: 405–408
DOI 10.1007/s00339-008-4783-9

Due to a processing error the presentation of Fig. 2 was incorrect. The corrected Fig. 2 is given here:

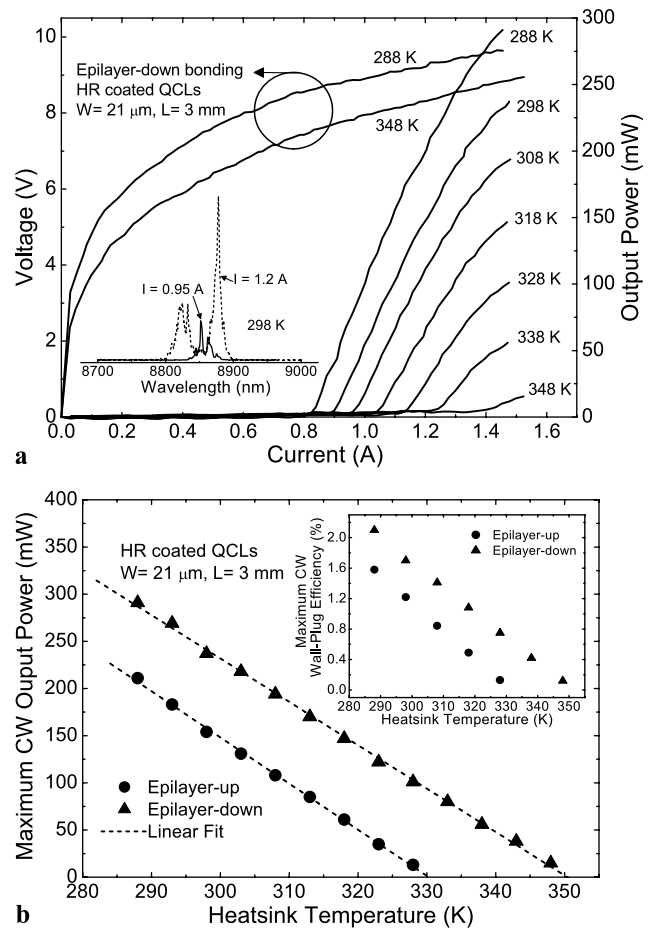

The online version of the original article can be found under doi:10.1007/s00339-008-4783-9.

J.S. Yu · S. Slivken · A. Evans · M. Razeghi (✉)
Center for Quantum Devices, Department of Electrical Engineering and Computer Science, Northwestern University, Evanston, IL 60208, USA
e-mail: razeghi@ece.northwestern.edu

J.S. Yu
Department of Electronic Engineering, Kyung Hee University, Yongin 446-701, South Korea

Fig. 2 (a) Temperature-dependent CW L - I - V curves of the HR-coated 20- μm -wide and 3-mm-long laser with epilayer-down bonding and (b) maximum CW output power versus heat-sink temperature for HR-coated 20- μm -wide and 3-mm-long epilayer-up and epilayer-down bonded lasers