



# Correction to: Modification of basalt fiber with Ni and carbon black formed synergistic microstructure for enhanced electromagnetic wave absorption

Tiantian Si<sup>1,2</sup>, Shuai Xie<sup>1,2,\*</sup>, Zhijiang Ji<sup>1,2,\*</sup> , Chao Ma<sup>1,2</sup>, Zihao Wu<sup>1,2</sup>, Junyu Wu<sup>1,2</sup>, and Jing Wang<sup>1,2</sup>

<sup>1</sup>China Building Materials Academy, Beijing 100024, People's Republic of China

<sup>2</sup>State Key Laboratory of Green Building Materials, Beijing 100024, People's Republic of China

**Published online:**

4 July 2023

© Springer Science+Business Media, LLC, part of Springer Nature 2023

**Correction to:**

**J Mater Sci: Mater Electron (2023) 34:1035**  
**[https://doi.org/10.1007/s10854-023-10468](https://doi.org/10.1007/s10854-023-10468-w)**

**-w**


The original version of the manuscript was published with errors in Fig. 7b. The correct Fig. 7 and figure legend is shown below:

---

The original article can be found online at <https://doi.org/10.1007/s10854-023-10468-w>.

Address correspondence to E-mail: [jzj1618@126.com](mailto:jzj1618@126.com)

<https://doi.org/10.1007/s10854-023-10910-z>

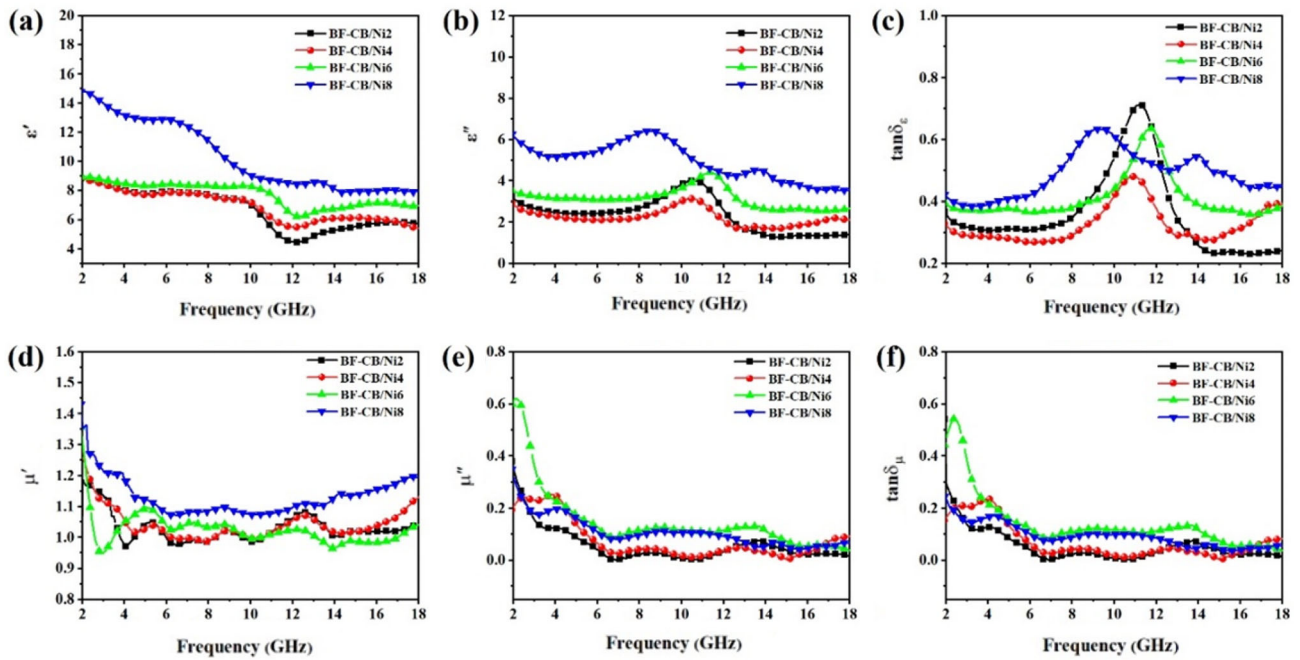

**Fig. 7** Frequency dependence of complex permittivity (a, b), dielectric loss tangent (c), complex permeability (d, e) and magnetic loss tangent (f) of BF-CB/Ni<sub>2</sub>, BF-CB/Ni<sub>4</sub>, BF-CB/Ni<sub>6</sub>, BF-CB/Ni<sub>8</sub>

This has been corrected by publishing this correction article.

**Publisher's Note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.