



Correction to: Economic Analysis Between Diesel and SOFC Electricity via Fusion-Biomass Hybrid Model

Hoseok Nam¹ · Ryuta Kasada² · Satoshi Konishi³

Published online: 31 October 2020
© Springer Science+Business Media, LLC, part of Springer Nature 2020

Correction to:
Journal of Fusion Energy (2018) 37:333–345
<https://doi.org/10.1007/s10894-018-0192-z>

In Fig. 1, the in/outlet temperature changes between the nuclear fusion reactor and the gasifier should refer to Takeda et al. [1]. We further thank Dr. Takeda for fruitful discussions.

The original article can be found online at <https://doi.org/10.1007/s10894-018-0192-z>.


✉ Hoseok Nam
namhs0107@gmail.com

¹ Graduate School of Energy Science, Kyoto University, Uji, Kyoto 611-0011, Japan

² Institute of Material Research, Tohoku University, Sendai, Miyagi 980-8577, Japan

³ Institute of Advanced Energy, Kyoto University, Uji, Kyoto 611-0011, Japan

Fig. 1 Fusion-biomass hybrid model

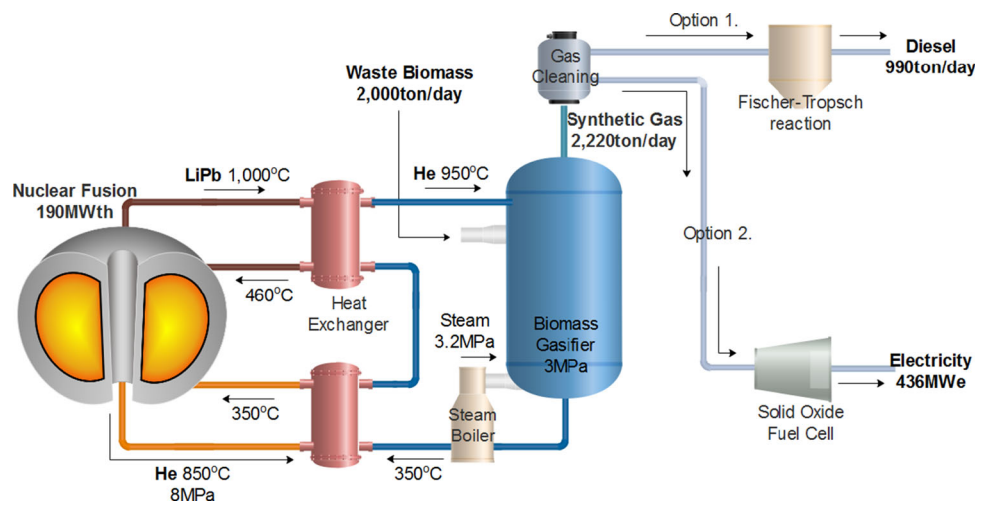

Reference

1. S. Takeda, S. Sakurai, R. Kasada, S. Konishi, Environmental life cycle assessment of high temperature nuclear fission and fusion biomass gasification plants, in *Proceedings of International*

Congress on Advances in Nuclear Power Plants (ICAPP) (Fukui & Kyoto, 2017)

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.