



# Towards augmented and mixed reality on future mobile networks

Luís Fernando de Souza Cardoso<sup>1,2,3</sup> · Bruno Yuji Lino Kimura<sup>2</sup> · Ezequiel Roberto Zorzal<sup>2,4</sup>

Received: 24 November 2022 / Revised: 22 March 2023 / Accepted: 6 April 2023 /

Published online: 12 June 2023

© The Author(s) 2023

## Abstract

Augmented and Mixed Reality (AR/MR) technologies enhance the human perception of the world by combining virtual and real environments. With the increase of mobile devices and the advent of 5G, this technology has the potential to become part of people's life. This article aims to evaluate the impact of 5G and beyond mobile networks in the future of AR/MR. To attend to this objective, we surveyed four digital libraries to identify articles and reviews concerning AR/MR use based on mobile networks. The results describe the state-of-the-art of mobile AR/MR applications and the benefits and challenges of the technology. Finally, after the review, we propose a roadmap concerning AR/MR hardware and software development to run applications supported by future mobile networks.

**Keywords** Augmented reality · Mixed reality · Mobile extended reality · 5G · 6G

## 1 Introduction

Technology has enabled people to stay connected and has become essential to human life. As a result, mobile devices such as smartphones, tablets, and wearable devices have increased their computational power, and companies are exploring new ways to connect users by providing new interfaces and experiences [37, 44].

---

✉ Luís Fernando de Souza Cardoso  
luis.cardoso@tu-ilmenau.de

Bruno Yuji Lino Kimura  
bruno.kimura@unifesp.br

Ezequiel Roberto Zorzal  
ezorzal@unifesp.br

<sup>1</sup> Technischen Universität Ilmenau, Ilmenau, Germany

<sup>2</sup> Universidade Federal de São Paulo, São José dos Campos, Brazil

<sup>3</sup> Universidade Virtual do Estado de São Paulo, São José dos Campos, Brazil

<sup>4</sup> INESC-ID Lisboa, Lisboa, Portugal

Among the many new ways of communication, Augmented and Mixed Reality (AR/MR) has been widely discussed and developed due to its benefits in many different fields, such as industrial support [178], healthcare assistance [174], teaching and training [97], smart cities [164], or marketing and sales [78].

New AR/MR applications have been mainly developed to run on mobile devices (smartphones and tablets) or head-mounted displays (HMDs) [25]. These devices are used for their mobility. Furthermore, although many developments consist of a local process without external information, a tendency in applications that require connectivity has been reported by [116]. Therefore, AR/MR technology is expected to be one of the most relevant applications in the next generation of mobile networks [154].

While using a mobile connection, many AR/MR applications face the challenge of transmitting 3D data and videos for mobile devices and HMDs [12, 85]. Furthermore, unlike video players, latency in AR/MR is crucial to promoting user immersion and reducing MR sickness [27].

The development of 5G networks have changed how people interact with technology. Many authors have discussed using AR/MR over 5G networks and beyond, which can significantly enhance the user experience by enabling seamless and high-quality interaction with digital content in real-time. However, as 5G is still not available worldwide, previous surveys have not had the opportunity to evaluate mobile network limitations in commercial use. Additionally, no research studies have proposed the limits AR/MR can achieve by using 5G and what will be feasible in future networks.

In order to tackle the challenges presented by mobile AR/MR, this paper aims to identify where AR/MR has been studied and developed in 5G networks. The results will be compared with the current worldwide availability of 5G networks, allowing for an evaluation of the results achieved on commercially available networks. Additionally, this paper will address the issues with the current mobile network for AR/MR, explore how 5G networks can contribute to AR/MR dissemination, and highlight the use cases that have been developed using AR/MR and 5G. Finally, based on the identified limitations of 5G, this work proposes a technological roadmap for AR/MR in the 5G era and beyond. These objectives will be achieved through a survey of the state of the art in AR/MR in future mobile networks.

The rest of this paper is structured as follows. Section 2 defines AR/MR and 5G networks. Section 3 presents previous publications arguing for AR/MR in 5G networks. Section 4 presents the research methodology. Section 5 compiles all data obtained from the research and discusses the results. Finally, Section 6 presents some final considerations and proposes the future of MR in 5G networks.

## 2 Definition and background

Here we present the main AR/MR and 5G Networks definitions.

### 2.1 Augmented and mixed reality (AR/MR)

Before defining AR/MR, it is necessary to introduce Extended Reality (XR), an umbrella term encompassing AR, VR, and MR technologies [65]. These technologies extend our reality by blending virtual and real environments, creating a fully immersive experience. In AR, digital information and virtual objects are overlaid in the real world [13]. This overlapping is achieved through an estimation process that uses markers, visual cues trained beforehand to be recognized later in the camera stream [76], or characteristic points from the scenario,

referred to as markerless tracking [48]. Users can use technology through AR headsets or handheld devices while interacting with and seeing what is happening in front of them.

On the other hand, MR takes the best qualities of AR to create immersive environments where virtual and real objects coexist and can interact with each other in real-time. MR requires an MR headset, such as Microsoft HoloLens, and more processing power than VR or AR.

In contrast to AR and MR, a VR experience fully immerses users in a simulated digital environment [169]. Users must wear a VR headset to view a virtual environment. In VR, most sensory information is computer-generated. Figure 1 shows the XR taxonomy used in this paper.


AR/MR technologies offer a wide range of benefits in various fields, including education, healthcare, and entertainment [20]. One of the key benefits of these technologies is their ability to enhance learning and training experiences. For example, medical students can use AR/MR to visualize and manipulate 3D models of organs and structures in real-time, which can enhance their understanding of complex anatomical structures [15, 90]. Similarly, AR/MR can train employees in various industries, such as manufacturing and logistics, by providing them with realistic simulations and training scenarios [97, 168, 177].

Another benefit of the technology is its potential to improve customer experiences and design. AR/MR can be used to create interactive and personalized experiences for customers, such as virtual try-on experiences for fashion products, or virtual tours of real estate properties [122] or realize collaborative activities of design [21].

Ensuring a consistent overlap of objects is one of the main challenges of MR. MR systems must estimate the virtual object's position and orientation (pose) in real-time [14, 88].

Markers are one of the most common methods used to estimate object poses. They are identified by cameras and compared with previously defined patterns [76]. However, markers are not always the best solution due to MR usage requirements. Markerless methods can be applied in such situations, which can consist of sensor-based and positioning techniques or vision-based methods.

Sensor-based and positioning techniques are generally more straightforward and less computationally expensive than vision-based methods [132]. Some of the most common sensors used for tracking include inertial and magnetic sensors [130]. However, such techniques provide a coarse pose estimation and are not recommended for solutions that require high accuracy [132].

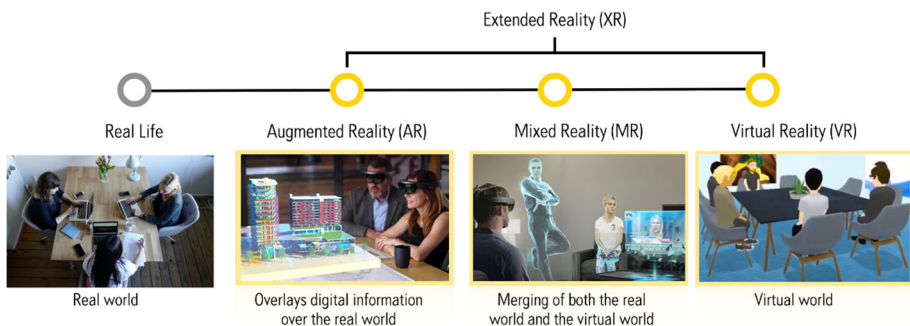

**Fig. 1** Extended Reality refers to all real-and-virtual environments generated by computer technology and wearables (figures adapted from [34, 63, 99], and [156])

Vision-based techniques are generally more complex and less mature than sensor-based techniques and marker-based tracking [88]. Natural Feature Tracking (NFT) and Simultaneous Localization and Mapping (SLAM) are some of the most commonly adopted markerless tracking methods. In NFT, characteristic points from the image are detected in real-time by the MR system, and the poses of virtual objects are calculated from such points [48]. In the SLAM method, a probabilistic feature-based map is constructed to estimate a real-time camera pose and a position of interested features [40]. In MR systems, SLAM is usually implemented via Parallel Tracking and Mapping (PTAM), where tracking and mapping occur separately, allowing the execution of both tasks in different processing cores [77].

## 2.2 5G Mobile networks

Fifth-generation mobile networks (5G) propose changing from an operator- and service-centric concept to a user-centric concept [45]. Some requirements of 5G are: 1000 times higher mobile data volume per area; 10 to 100 times higher number of connected devices; 10 to 100 times higher user data rate; 10 times longer battery life for low-power massive machine communication; and five times reduced end-to-end latency [108].

Different architectures were proposed to achieve the network requirements, such as Multi-tier architecture, Centralized-radio access network (C-RAN), and Cognitive Radio Network (CRN) [47, 53, 109]. Figure 2 illustrates a general 5G network architecture.

### 2.2.1 A multi-tier architecture

The Multi-tier architecture is a hybrid network composed of a macro cell in the upper layer and smaller cells working under macro cells' supervision in the lower layer [1]. The macro cell encompasses all types of smaller cells of different sizes, such as Femtocell (which ranging from 10 to 20 meters for a few users); Picocell (a range of 200 meters and capacity from 20 to 40 users); Microcell (with up to 2 kilometers range for more than 100 users); and Macrocell (with a range up to 35 kilometers and capacity for many users) [109].

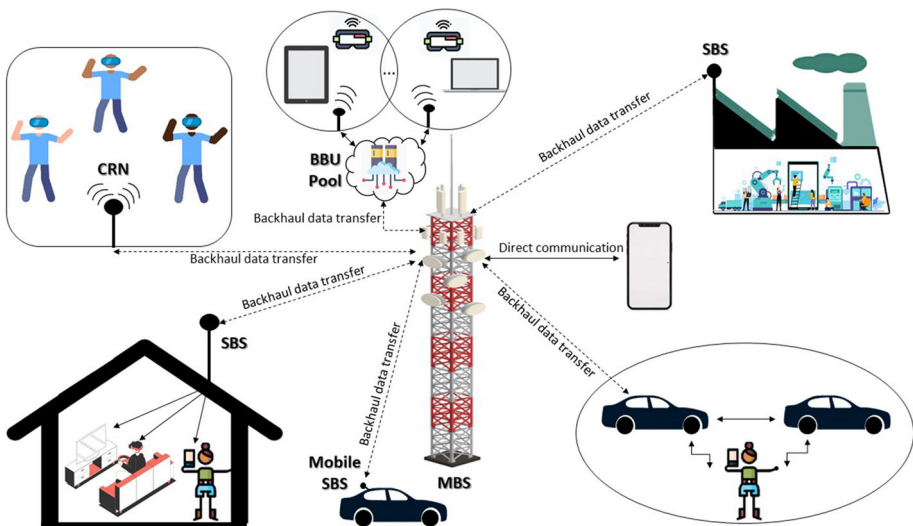


Fig. 2 General 5G network architecture (adapted from [28, 46, 53, 109], and [47]).

The service in the proposed hybrid network is delivered by macro base stations (MBS) and small base stations (SBS). Both are connected via backhauls [158].

The MBS has several antennas spread across the macro cell that connects to the base station through an optical fiber. These antennas are used to identify users belonging to each cell. Aiming to communicate with the MBS and SBS, antennas can be deployed on buildings' rooftops and vehicles of the transportation system, for instance.

Users with their equipment to access the network, called UE (User Equipment), can communicate via SBS or WiFi, or mmWave, reducing the load over the MBS [46].

In this architecture, detecting and recovering defective cells in the network is extremely important, especially in dense architectures with multiple layers. For this purpose, three self-reconfiguration architectures are proposed [160]:

- **Centralized:** a dedicated server is responsible for detecting defective cells by collecting user behavior data. If an abnormal event is noticed in a cell, the server can reconfigure it through the information collected about the system. However, such a configuration requires a high level of communication on the network and high computational cost, which limits its scalability.
- **Distributed:** each SBS is responsible for detecting failures in smaller cells in its neighborhood through the analysis of the signals received and information collected about users when passing through the domain of one cell to another (i.e., handover). If any of these nearby cells fail, SBS increases transmission power and hence the access cover for the users of the faulty cell.
- **Local Cooperative:** an architecture based on distributed triggering and cooperative detection. Each SBS is responsible for collecting information about users, and if an abnormality is detected, a control message is sent to the dedicated server, i.e., a distributed trigger. Once activated, the server makes a decision based on the information received by all SBS, i.e., a cooperative detection. Thus, we have an approach that does not require communication between smaller cells and offers high accuracy and low latency in its execution.

## 2.2.2 Centralized-radio access network (C-RAN) architecture

The current architecture of the radio access network (RAN) consists of MBS formed by antennas, a radio unit (Remote Radio Head - RRH), and a Baseband Unit (BBU), which can be located up to 40 kilometers away from the RRH [28].

The centralized radio access network (C-RAN) is an architecture that breaks this paradigm by proposing that a dedicated BBU no longer serves each RRH. Instead, the RRHs are served by a cluster of BBUs in a cloud system.

When virtualizing network mechanisms, the BBUs' operations can be centralized while their functionalities can be virtualized in central servers [28, 95].

## 2.2.3 Cognitive Radio Network (CRN) architecture

Ad-hoc wireless networks are composed of self-organized devices and deployed without human support. Although these networks can support different wireless transmission technologies, their operations are mostly limited from 900MHz to 2,4GHz [4]. The operating bands are increasingly congested with the growth in the number of devices, especially in large urban centers. However, other frequency bands licensed to operators, in the 400 to 700 MHz range, are underused for transmission [4, 61].

A Cognitive Radio Network (CRN) is formed by a set of cognitive radio nodes called secondary users (SU), which exploit the frequency spectrum opportunistically, seeking its best use. SU can analyze several different channels, looking for those not allocated by primary users (PU). Thus, when available, the channels can be used by other services, optimizing the availability of frequency bands and reducing interference among other users [135].

A possible CRN-based architecture for 5G networks would be establishing a relationship in which smaller cells would act as SU. Thus, they would communicate with the macro cell using a licensed frequency band while providing service to the UE through opportunistic access, interfering to a minimum in the activities of the macro cell [109].

### 3 Related works

Aiming to identify reviews concerning AR/MR application on 5G networks, a search in ACM, IEEE Xplore, Scopus, and Science Direct libraries was accomplished in December 2022 using the same search string proposed in the research methodology (Section 4). The results of this search, along with their primary conclusions, are presented in Table 1. It is important to note that a comparison between these findings and those presented in the current paper can be made, as shown in the final row of the table.

The related work from [106] reviewed the state of the art in VR and AR technologies and how the 5G network supports virtual applications demands. The authors also present expectations for the future of AR applications and challenges for 5G.

In [116], the AR/MR is discussed in mobile networks before 5G, and the authors highlight that the limited networking and computing capability hinder the technology's practical application. Then, the authors compared possible network architectures in 5G and how the AR/MR can be benefited from each one. Finally, the paper discusses the challenges of AR/MR on the 5G networks.

In [55], the problem of latency and its impacts on the quality of service (QoS) and quality of experience (QoE) for different technologies are discussed, which includes AR. The authors focus on the importance of 5G networks for future ultra-reliable, low-latency AR applications and the network's open issues and challenges.

Recent articles have discussed the potential benefits of 5G and beyond, with AR being one of the technologies that could reap the rewards of these networks. In one such article, [175], the authors describe an overview of 5G and an introduction to 6G. Unlike previous authors, they anticipate an increase in AR applications only with 6G networks due to higher data rates, lower latency, more efficient spectral efficiencies, increased energy efficiencies, and improved network capacities.

AR has been considered a core technology [94], bringing potential towards holographic communication together with 6G. In [157], the authors discuss the technology and how it can change communication as mobile networks become more reliable while pointing out the importance of new signal processing techniques to address security in the AR future world.

Another review concerning AR challenges in 5G is presented in [68]. The paper discusses edge computing for AR, its benefits, and challenges regarding offloading tasks. The authors also highlight the trade-off between high accuracy tracking and low latency; the latency tends to decrease as the accuracy increases.

In [140], the authors discuss mobile AR applications and the current and future network architectural options to support such applications. The authors also describe technical requirements such as communication, mobility and energy management, service offloading and migration, security, and privacy.

**Table 1** Comparison between related surveys and the current paper

Title	Publication Year	Discuss AR/MR before 5G	Discuss AR/MR possible architectures in 5G networks	Presents possible applications	Discuss existing applications running on 5G	Discuss AR/MR hardware opportunities for 5G and beyond	Discuss challenges of AR/MR on 5G	Discuss AR/MR applications beyond 5G	Reference
Virtual and augmented reality on the 5G highway	2017			X			X		[106]
Web AR: A Promising Future for Mobile Augmented Reality-State of the Art, Challenges, and Insights	2019	X	X				X		[116]
Tactile internet and its applications in 5G era: A comprehensive review	2019	X	X	X					[55]
On the 5G and beyond	2020						X	X	[175]
6G: A survey on technologies, scenarios, challenges, and the related issues	2020							X	[94]
Communications in the 6G Era	2020						X	X	[157]

Table 1 (continued)

Title	Publication Year	Discuss AR/MR before 5G	Discuss AR/MR possible architectures in 5G networks	Presents possible applications	Discuss existing applications running on 5G	Discuss AR/MR hardware opportunities for 5G and beyond	Discuss challenges of AR/MR on 5G	Discuss AR/MR applications beyond 5G	Reference
A Survey on Mobile Augmented Reality with 5G Mobile Edge Computing: Architectures, Applications, and Technical Aspects	2021	X	X	X	X		X		[68]
A Survey on Mobile Augmented Reality with 5G Mobile Edge Computing: Architectures, Applications, and Technical Aspects	2021		X			X	X		[140]
Wireless communication research challenges for Extended Reality (XR)	2022		X				X		[3]
Towards Augmented and Mixed Reality on future mobile networks	2023	X	X	X	X	X	X	X	This article



Finally, in [3], authors examine the data rate and the latency necessary to implement AR/MR applications using a mobile network. Their analysis concluded that public 5G networks could not support applications for wide areas or with high interactions. However, 6G and next-generation WiFi systems will allow AR/MR as an efficient communication tool.

Unlike the studies mentioned above, in this paper, we review from before 5G until new developments over 5G networks. The results propose a road map of the technology based on the network limitations and challenges, which was not presented before. Our analysis extends 5G, and we point out applications that will probably be feasible only in 6G networks. Additionally, we discuss some opportunities for future AR/MR devices beyond 5G.

## 4 Research methodology

This survey was conducted by three authors from two different institutions whose research domains are: Extended Reality, Computer Networks, and Distributed Systems. The methodology used to conduct this survey was based on the guidelines proposed by [23], which consists of three phases:

- **Planning:** in this phase, it is defined the research questions and the review protocol;
- **Conducting:** this phase consists of identifying previous related papers, selecting and evaluating the primary studies, and extracting the interest data;
- **Reporting:** finally, this phase defines the communication strategy to publish the results.

### 4.1 Search strategy

The strategy to define the search string consists in identifying what has been published concerning AR/MR and 5G and beyond networks and understanding the AR/MR systems that use mobile networks. Therefore a combination of the technologies' names was implemented to create the following search string:

```
("augmented reality" OR "mixed reality") AND ("mobile network"  
OR "6G" OR "5G" OR "4G" OR "LTE" OR "3G")
```

The search was accomplished in ACM, IEEE, Science Direct, and Scopus databases. First, we searched the string in the title, abstracts, and author's keywords. The results were filtered to select only manuscripts published in journals and written in English.

The first author realized the screening of the identified papers. After categorizing the papers as accepted or rejected, the second and third authors reevaluated the groups to validate the decision according to the criteria defined in this survey protocol.

The software StArt (State of the Art through Systematic Reviews) was employed to support this survey. StArt provides a protocol to conduct a survey [79] relevant results are reported in [59] and [155]

### 4.2 Research questions

The research questions and the motivation that this survey aims to answer are presented in Table 2.

**Table 2** Research questions and motivations

Research question	Motivation	Discussion	Section
Are the AR/MR applications, that require a mobile network, been developed in commercially available networks or testbeds?		As 5G is still not presented worldwide, this question helps to understand if there is a lack of development in countries where 5G is still not available. Also, this question is essential to highlight in the future if the testbeds achievements represent the same scenario as commercial networks.	Augmented and Mixed Reality developments using 5G
How can AR/MR benefit from 5G?		This question aims to understand if the mobile network can bring new developments tendencies to AR/MR. Also, it is possible to identify the purpose of the developments as well as their architecture.	Architectures for Augmented and Mixed Reality Augmented and Mixed Reality use cases using 5G
What are the challenges for AR/MR in 5G networks?		This question helps to identify what to expect from 5G and what will require future mobile networks.	Challenges to Augmented and Mixed Reality in the 5G era
What to expect from AR/MR in beyond 5G?		Once identified the challenges this question helps to identify the future of AR/MR using mobile networks and create a road map for the technology.	The future of Augmented and Mixed Reality beyond 5G

### 4.3 Inclusion and exclusion criteria

We considered only articles and surveys for this study and extended written in English and published in journals from previously cited databases until the end of 2022. We excluded manuscripts that do not consider AR/MR or do not consider AR/MR using a network. Moreover, non-academic publications such as commercial literature, reports, and posters were also excluded.


### 4.4 Selection procedure

After accomplishing the search strategy, 401 articles were found. However, 87 of those appeared in more than one database and were considered duplicate studies.

After eliminating duplicated manuscripts, a total of 314 publications were screened and assessed to determine if they addressed AR/MR and mobile networks. Among them, 109 manuscripts were identified as relevant for data extraction. Figure 3 outlines the selection process across the databases, highlighting the reasons for the rejection of manuscripts based on the inclusion and exclusion criteria.

### 4.5 Data extraction

Once the papers were selected, the next step was reading the entire work to extract the information that answered the questions of the present study. The following collected data from the articles were extracted:

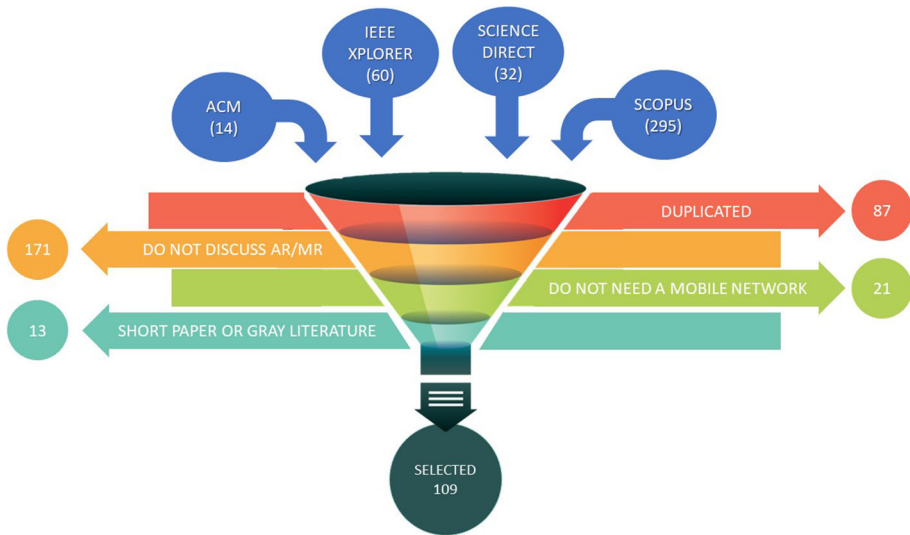

**Fig. 3** Selection procedure to define primary studies

- Title;
- Publication Year;
- Published Journal;
- Research category (article or survey);
- Country of work of the first author;
- Authors' affiliation;
- Application context (mobile network before 5G, using 5G or beyond 5G);
- Network Infrastructure;
- Challenges or limitations of the application in the mobile network;
- Advantages in the use of the mobile network compared with previous generations;
- For the applications that used 5G and beyond networks, If the development used a commercial network or a testbed/simulator.

Finally, a digital form to record the information of the 109 primary studies was prepared. This phase also adopted the stArt tool to compile all the information. The results were validated for the other two authors according to their main research backgrounds.

## 5 Bibliometric results

Firstly, we separated the selected manuscripts into three groups. A group of papers concerning applications running until 4G network, publications arguing about AR/MR in 5G, and research of AR/MR in 6G. Figure 4 shows the distribution of each group per publication year. As it is possible to note, the interest in AR/MR applications on mobile networks increased significantly from 2019, when the first 5G networks became commercially available.

Secondly, we identified the publication's source. Figure 5 shows where the selected papers were published. Among the selected articles, 14 journals had more than one

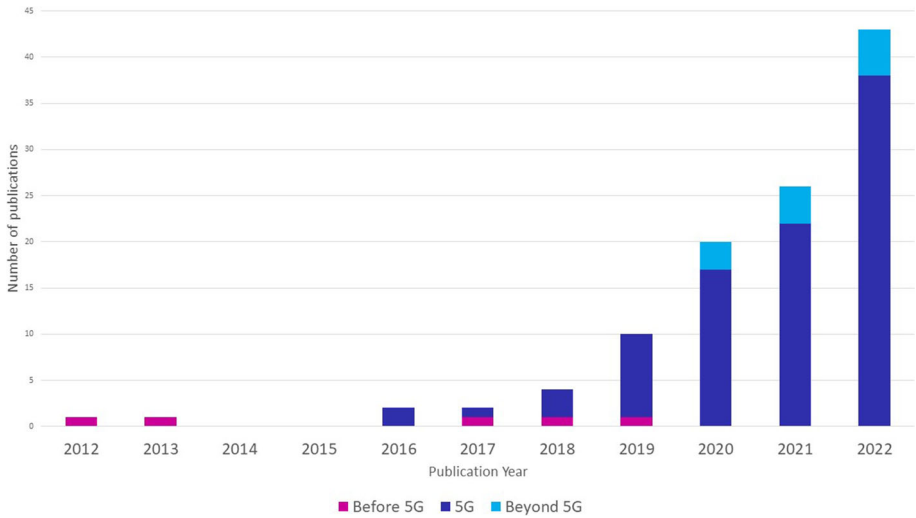


Fig. 4 Identified publications per year

published paper. The top three journals by the number of published papers were IEEE Access (11 papers), IEEE Internet of Things Journal (9 papers), and IEEE Transactions on Broadcasting (6 papers).

Finally, we analyzed authors’ affiliation Fig. 6 shows institutions that had more than one article selected, and the links represent that these institutions worked in partnership for publications.

Although most authors’ affiliations are research and education centers, the telecommunication and healthcare industries also appear as industrial segments researching AR/MR in mobile networks. Figure 7 shows the industrial domains of the authors and co-authors.



Fig. 5 Journal where articles were selected

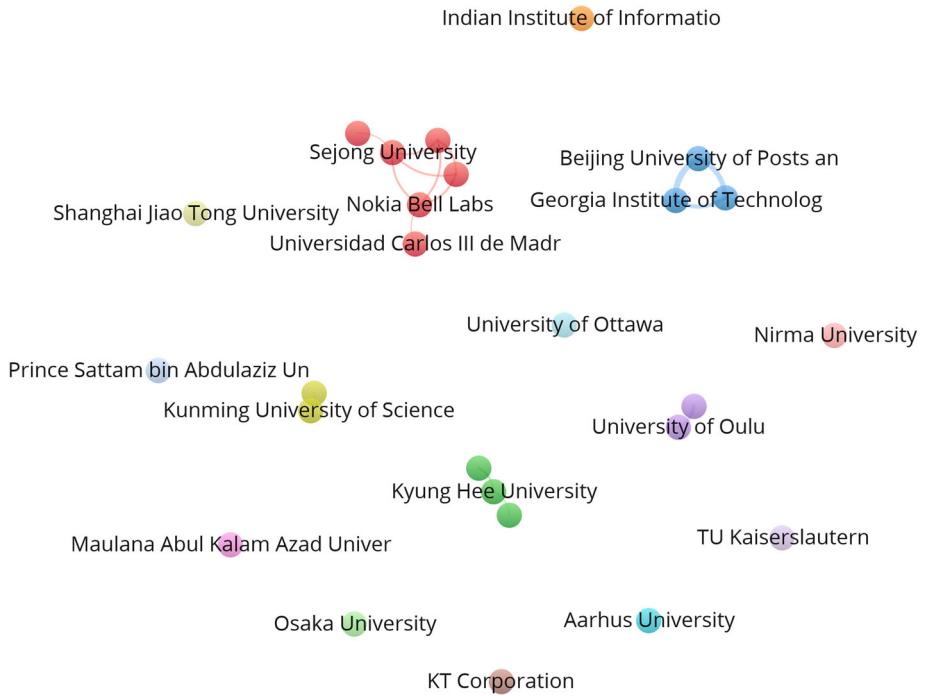


Fig. 6 Authors' affiliations and institutions co-authorship

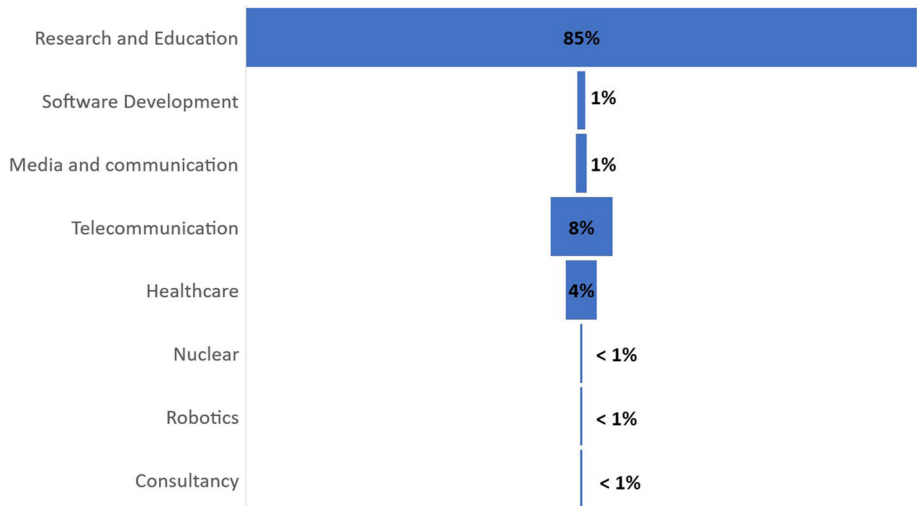


Fig. 7 Authors affiliations domain

## 6 Mixed Reality main difficulties in pre-5G networks

The evolution of mobile network generations had raised the expectation that 4G technology would facilitate the development of AR/MR applications using mobile networks. This expectation was fostered primarily due to the upstream traffic flowing at higher transmission rates and lower latency than the previous network generation, allowing rich context data to reach back-end servers to be processed [166]. A few applications were presented, such as poster presentations [12] user guidance [166].

However, with the 4G deployment, many AR/MR expectations were not fulfilled, and issues have remained open. Two significant challenges for AR/MR applications using mobile networks are web browsers and external processing.

The authors highlighted that most applications requiring a web browser had not achieved the minimum computational capacity to track and render information at the necessary frame rate. The primary reason is the computing inefficiency of scripts like JavaScript in a mobile web browser for dense computing tasks [116, 117]. Additionally, web browsers raise concerns about a lack of standards for capturing, processing, and generating holograms [115, 116].

Considering applications that do not require a web browser, the network latency and bandwidth were the most mentioned issues [55]. Although the 4G made feasible, the connection between AR/MR systems and information located externally the device [32, 104], the network could not offer latency lower than 15 frames per second (fps), data transfer rate over 100 Mbps and packet error rate under  $10^{-5}$  [54, 67, 85, 92]. For this reason, those applications used network connections only to receive and send data, maintaining all the graphic computing processes locally.

## 7 The augmented and mixed reality in 5G networks

The advent of 5G has the potential to significantly transform AR/MR applications, as it enables users to have greater mobility [94]. As a result, several authors have proposed changes in software development, including using diverse architectures based on the application's purpose. In addition, as devices move towards more ergonomic designs with better energy consumption, the AR/MR user experience is expected to evolve. However, achieving this transformation in AR/MR involves overcoming several challenges to provide the best experience for future users.

### 7.1 Architectures for augmented and mixed reality

Analyzing the selected manuscripts, we identified possible architectures to operate AR/MR applications in 5G networks. Regarding the core processing functionality location, the authors segregated the architectures into three groups: local, edge, and cloud.

#### 7.1.1 Local architecture

The local architecture consists of applications that process the data within the device or in a server located in the local network. In such an architecture, the 5G core network updates the software, backup, or transfers information among devices [73].

This architecture allows the benefit of using the same security and privacy policies and standards as the internet. Moreover, it is less complex to be implemented as data transfer

can be based on standard protocols. Therefore, compared to previous mobile networks, 5G allows data transfer to be faster and more extensive.

As a disadvantage, it requires the devices to have a high capacity to process all the information and power capacity for continuous use. These challenges are some of the issues that HMD and mobile devices may face in 4G networks to run AR/MR applications.

### 7.1.2 Edge architecture

The edge architecture operates upon two different modes. First, as a client-server model where the server is hosted at the network edge executing computationally intensive tasks, such as pre-processing, AR tracking, and rendering the augmentations [18, 103, 119, 140]. In addition, it is possible to operate as a cache located in the SBS and the users' devices, especially to cache background scenes. The caching strategy can be facilitated by distributed caching schemes rather than downloading the content from the SBS, so that content can be shared using D2D communications [30, 144].

This architecture requests the remote cloud server when the application is not deployed in the edge server or cache [86, 115]. Computation-intensive tasks that are difficult to be satisfied at the edge are then assigned to the cloud server [84]. On the other hand, moving the services from the remote cloud to the network edge reduces the communication delay and the bandwidth usage of core networks [50, 52, 69, 84, 116, 163]. Furthermore, this architecture's energy consumption is reduced compared to local processing due to the reduction of processes that occur in the device [10, 30, 172]. The energy saved is outstanding for complex applications, not being so different for low fps uses [41].

In edge-based architectures, new challenges arise concerning security and privacy. Different heterogeneous network elements are collocated in the edge infrastructure, making the conventional privacy and security mechanisms inapplicable. Also, the data offloading over wireless channels may not be secure since malicious eaves-droppers can capture computation tasks [113]. Furthermore, when edge caching and computing are used, an individual's information contents, such as visited locations, may be shared with other users causing privacy and security concerns [136, 144].

It is crucial to provide flexible and shared infrastructure to reduce the dense SBS and deployments of MEC Points of Presence and investments in network operations, especially in dense urban zones [35, 96, 153]. Furthermore, the challenge is to face the high number of possible edge servers and the incoming user requests with applications that require low latency. Therefore, it is essential to comply with the applications' latency thresholds and reduce the latency variance among users in the same session [5].

The size of the cache, cache management, and computing costs are all open issues that require further study. As processing tasks and cached content become more complex, it is important to correctly define which content should be cached and where it should be cached, as well as determine what should be processed in the edge server and which server it should be processed on [39, 83, 144]. Access to the edge server or cache also requires specific algorithms to ensure fair access and avoid user competition for accessing the edge resources, which can lead to reduced quality of experience (QoE) [62, 123, 124, 136, 144].

### 7.1.3 Cloud architecture

A cloud-based architecture system operates through the client-server model. where computationally intensive tasks are executed on a remote server. Such an architecture has appeared

in pre-5G AR/MR applications [115, 116]. Besides the latency reduction in 5G, cloud architecture is recommended for those applications that do not require low latency [41, 140].

Compared to local architecture, a cloud can also offer energy saving to the user device, as only pre-processing tasks are accomplished in the device [144]. Also, application management is more straightforward as most of the software is deployed on the server side, avoiding accessing each device for updates.

On the other hand, cloud architecture is centralized, so the application may be unavailable whenever the server fails. Thus, this architecture highly depends on the infrastructure conditions [140]. Further, as in edge architecture, critical information is transferred outside the user device, so privacy and security issues must be considered [136, 144].

## 7.2 Augmented and mixed reality developments using 5G

We conducted a study of selected articles in which authors discussed 5G and beyond networks to identify the origin of the research. Our aim was to determine if the published studies originated from countries where 5G networks have been deployed. Figure 8 shows the countries with 5G networks worldwide and the results from the selected studies. The information regarding network availability is up to June 2022 [22].

The map categorizes the countries into three groups:

- 5G networks launched: Countries where 5G networks are commercially available from standalone or non-standalone infrastructure (networks that still depend on LTE network);
- 5G technology deployment: Countries where operational tests have been performed, but the service is still not available;
- Investment in 5G: Countries where investments have been made but no network infrastructure has been deployed.

Comparing the countries with any available 5G network and the origin of research, we found that countries publishing about 5G and beyond have already launched their networks. The only exceptions were studies conducted in Morocco [43], Egypt [107], Pakistan [118], and India [19, 26, 31, 54, 55, 121]. In these publications, authors conducted surveys, published conceptual papers, or emulated 5G using commercial simulators, such as EdgeCloudSim.

Regarding publications from countries with available 5G networks, 70% of the studies used a testbed or emulators to validate the AR/MR application. However, this scenario has gradually changed, and in 2022, almost 40% of the identified publications tested the applications on a commercial 5G network. Figure 9 shows the change over the years.

## 7.3 Augmented and mixed reality use cases using 5G

With the deployment of 5G networks, many studies have been published discussing the use case, benefits, and constraints. Table 3 presents the use cases we found and their network characteristics. This table did not include studies proposing general AR/MR applications. Instead, we grouped the manuscripts according to their primary area. For each study, we consider:

- User mobility: if the user is static or on displacement. We consider under displacement if the user movement is faster than walk;



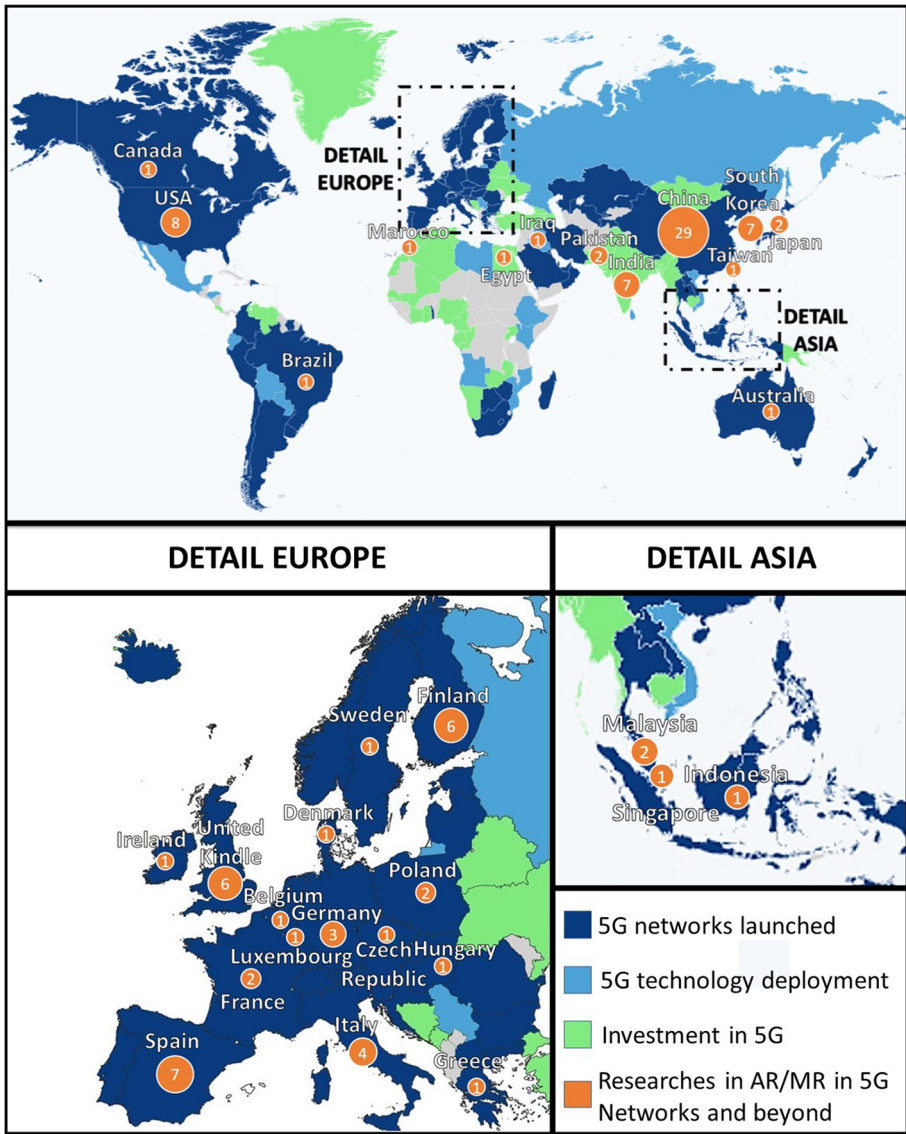


Fig. 8 5G networks availability and AR/MR studies using 5G (adapted from [22]).

- Navigation system: we analyze if the application is suitable for indoor or outdoor contexts;
- Suitable context: if the application is used in an urban or rural zone;
- User interaction: if the application allows single or multiple-user interaction in the same scene;
- Communication architecture: if the application operates in client-server or D2D model;
- Processing architecture: for a client-server application, one of the 5G architectures was employed.

**Table 3** AR/MR use cases in 5G networks


Area	Objective	User mobility		Navigation System		Suitable context		User interaction		Communication architecture		Processing architecture		Reference
		Static user	Displacement user	Indoor	Outdoor	Urban	Rural	Single User	Multiple User	Client -Server	D2D	Edge	Cloud	
Cultural	Show museum information	X		X		X		X			X			[137]
		X		X		X		X		X		X		[64]
		X		X		X		X		X		X		[129] [70]
Development / Training	Language-based VR/AR specialized language Training users	X		X		X		X		X		X		[73]
		X		X		X		X		X		X		[85]
		X		X		X		X		X		X		[8]
Education / Training	Children education Artistic Creation and Design	X		X		X		X		X		X		[80]
		X		X		X		X		X		X		[38]
		X		X		X		X		X		X		[82]
Health	Assist medical procedures and analysis	X		X		X		X		X		X		[93]
		X		X		X		X		X		X		[161]
		X		X		X		X		X		X		[16]
		X		X		X		X		X		X		[170]

**Table 3** (continued)

Area	Objective	User mobility		Navigation System		Suitable context		User interaction		Communication architecture		Processing architecture		Reference
		Static user	Displacement user	Indoor	Outdoor	Urban	Rural	Single User	Multiple User	Client -Server	D2D	Edge	Cloud	
Industrial	Remote diagnosis	X		X		X		X		X			X	[146]
		X		X		X			X			X		[11]
		X		X		X		X		X		X		[147]
	Show devices information	X	X		X			X		X		X		[10]
	Cirurgical procedures training	X		X		X		X		X		X		[89]
	Instruct operators	X		X		X		X		X		X		[141]
	Orient constructions and maintenance	X			X		X		X		X		X	[128]
	Maintenance	X		X		X		X						[31]
		X		X		X		X				X		[154]
	Show machine and devices information	X		X	X			X		X				[167]
Remote operation		X		X		X		X		X		X		[51]
		X		X		X		X		X		X		[52]
		X			X		X		X		X			[139]
		X		X		X		X		X			X	[133]
		X		X		X		X		X			X	[145]
		X		X		X			X			X		[24]

**Table 3** (continued)

Area	Objective	User mobility		Navigation System			Suitable context		User interaction		Communication architecture		Processing architecture	Reference	
		Static user	Displacement user	Indoor	Outdoor	Urban	Rural	Single User	Multiple User	Client -Server	D2D	Edge			Cloud
Industrial /Social	Show machine and devices information	X		X		X		X	X	X		X	[98]		
		X		X	X	X		X		X		X	[151]		
Marketing and sales	Show holographic presentation	X		X		X		X	X	X		X	[72]		
		X		X	X	X		X		X		X	[49]		
Social	Show smart city information	X		X		X		X	X	X		X	[41]		
		X		X	X	X		X		X		X	[118]		
	Smart home devices information			X		X		X		X		X	[81]		
			X		X	X		X		X		X	[84]		
	Driver assistance		X			X		X		X		X	[125]		
		X		X	X	X		X		X	X	X	[19]		
	Gaming	X		X		X		X		X		X	[127]		
		X		X	X	X	X	X		X		X	[114]		
	Object recognition and information	X		X		X		X		X		X	[114]		
		X		X	X	X		X		X		X	[162]		
	Holographic communication	X		X		X		X		X		X	[162]		
		X		X	X	X		X		X		X	[162]		
	Show sports information	X		X		X		X		X		X	[162]		
		X		X	X	X		X		X		X	[162]		

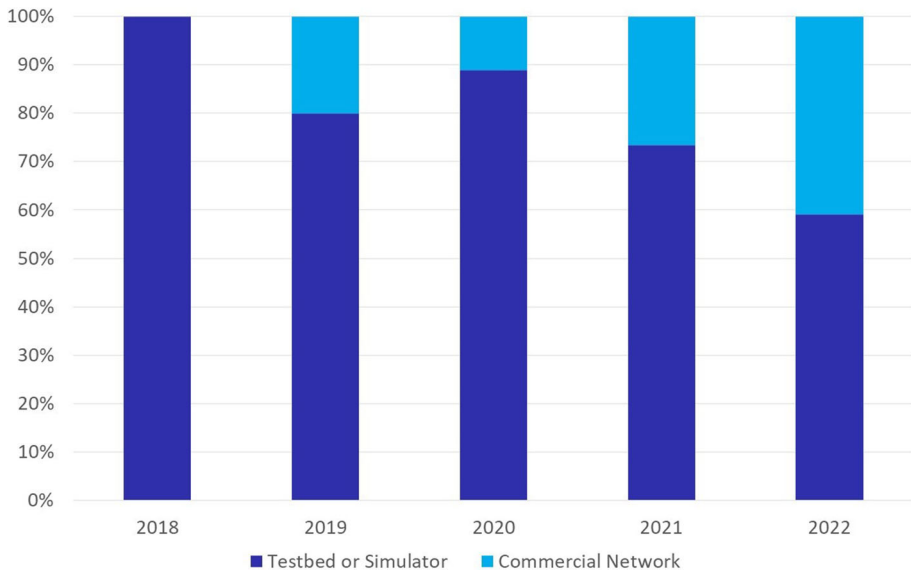

**Fig. 9** Use of commercial 5G or testbeds per year

Most studies we surveyed consider scenarios where users are static or on short or slow movement. This characteristic is presented in both indoor and outdoor navigation systems. In these applications, users are not crossing through base stations (i.e., handovers). Another relevant fact is that most of the studies occurred in testbeds, which tends to simplify the network architecture. Therefore, there is a gap in the literature to exploit scenarios where users frequently change their base stations (i.e., fast handovers) while using AR/MR applications.

The Client/Server model has been predominantly deployed over D2D communications in the communication architecture. Another relevant found was that most applications propose an edge architecture due to the potential for latency reduction. Moreover, such an architecture has been considered a trend in 5G and beyond networks to offload complex tasks.

Finally, we analyze how users interact with the proposed systems. Only one study considers a browser application [127]. While all the other applications are standalone systems, it is still a gap to answer if browser standards will be feasible and reliable in the future of AR/MR, using 5G and beyond networks. Also considering user interaction, one study presented an analysis of haptic AR/MR over 5G, [102] highlighted open issues considering this interaction.

AR/MR developments with 5G networks tend to offload some tasks to an edge server or cache to provide a better user experience. Also, those applications can be used for industrial, commercial, or consumer use cases. However, the literature still has a gap in understanding how those systems will behave in scenarios of high demand, fast handovers, and coverage instability. Finally, we could not find evidence of web AR/MR use in the 5G networks, as most studies proposed standalone applications.



increase to 6340 PB by 2025, serving 26502 million users, with most of this content associated with AR/MR [138]. This trend is seen worldwide as AR/MR devices become cheaper [111].

Infrastructure issues can create bottlenecks in any of the 5G system layers, degrading the overall end-user experience [60]. Therefore, important countermeasures are necessary, such as implementing policies to ensure the appropriate allocation of resources and support to the layers of 5G systems. Balancing computational demands of both service subscribers and providers is also essential to ensure proper system functionality [60, 62, 102, 127].

Finally, 5G networks must ensure reliability in a dense environment and allow for user mobility, as mobile users can change their positions during the computation offloading time [56].

### 7.4.2 Security and privacy

Security and privacy standards were the second most challenging mentioned. The security challenge for AR/MR can be faced on three levels: input, data access, and output [131]. Therefore, AR/MR architectures are susceptible to security issues in different layers, such as communication and data processing.

The data input level concerns protecting data acquired from the user device. Therefore, input protection should ensure that sensitive information collected from cameras and sensors (e.g., environment elements further than the AR/MR interest context, people's faces) should be removed before offloading the data [140, 157]. As such, countermeasures such as computer vision algorithms and machine learning techniques capable of capturing only relevant objects can be applied.

The data access security level concerns the protection of data transferred among users and servers. Such a level should be implemented in servers or devices, in cases of device-to-device (D2D) communication [53, 140]. The data access should prevent individual private information from being shared with other users [55, 136, 144]. Maintaining network privacy and potential anonymity will challenge the next 6G network architecture due to the dynamic behavior of devices joining/leaving mobile networks [157]. Some approaches to deal with the data access security level include the use of blockchain integrated with edge computing to achieve secure authentication and collaboration with trusted distributors [139], as well as cryptography techniques with machine learning [57].

The output level concerns the protection of received data. As this communication may occur from public networks, ensuring that the received data are trustworthy is crucial. Spurious data may display the unintended result, improper positioning tracking, harming the users [17, 131, 140, 167]. Hence, providing security countermeasures in the user devices is imperative to ensure the privacy of users [120].

In summary, security and privacy challenges in AR/MR systems include ensuring system availability under multiple attacks, device and data anonymity, mutual authentication between users or servers, and unlinkability [167]. Countermeasure mechanisms have to consider data integrity and security while maintaining low latency for the end-user [68].

### 7.4.3 Latency and bandwidth

In the context of AR/MR in 5G networks, latency and bandwidth are critical factors for a successful user experience. Latency is a significant challenge as it encompasses both device and MEC service latency and reliability [92].

The latency requirement of AR/MR cannot be achieved by a 5G network, particularly in cloud architectures, when the core network is far from the user [141]. Moreover, the response time increases with the complexity of virtual objects and accuracy in tracking [68, 74, 114, 136, 137].

Recent studies have shown that even in 5G, latency-sensitive tasks such as telesurgery are still problematic due to the critical response time and unacceptable connection breakdowns [161].

To address these issues, it is necessary to achieve a per-user data rate of gigabit per second for AR/MR applications to meet the quality level of user experience. As encoding and decoding data are time-consuming processes, the transmitted data cannot be compressed, making high bandwidth essential for the optimal functioning of AR/MR applications [43].

#### 7.4.4 Efficient resource allocation

Efficient resource allocation is another significant challenge in AR/MR systems due to the presence of devices with heterogeneous services and platforms. The allocation of communication and computational resources is a complex task, as it must balance the requirements of different devices and services. Previous studies have shown the need for efficient resource allocation in 5G networks [86, 92, 113, 134, 171, 172].

Transmission and synchronization of heterogeneous data streams in AR/MR systems may face challenges due to packet loss, higher packet rate, and variable delay [136, 143]. To overcome these challenges, technologies such as dynamic time division duplexing can offer a flexible configuration of the downlink and uplink channels ratio to adapt to the asymmetric traffic of AR/MR applications [142].

Another critical aspect of efficient resource allocation is the need for ultra-reliable low-latency communication (uRLLC) networks to provide full coverage with no dead zones and an availability of around 100% [107]. This ensures that AR/MR applications can operate with high reliability and availability.

Finally, as future AR/MR applications are prone to allow users' mobility, flexible edge server collaboration [56, 75, 112, 126] and new techniques to improve streaming [29, 110] are required to provide seamless and uninterrupted services to users.


## 8 The future of augmented and mixed reality beyond 5G

Efforts to evolve networks beyond 5G are underway in research centers worldwide, with significant efforts focused on exploring new communication mechanisms to integrate networks across space, air, oceans, and land to achieve seamless global coverage of integrated information [94, 107].

Studies on 6G envision a network generation supported by autonomous devices, such as terrestrial and aerial autonomous vehicles, to implement mobile edge servers, with data forwarding to cloud servers in the absence of support for compute-intensive tasks at the edge [54, 150]. Algorithms should be designed to optimize offloading policies and consider the impact of the current offloading decision on the execution of subsequent tasks [81, 103].

Although 5G networks can improve QoS from enhanced mobile broadband and ultra-reliable low-latency communications, there are no dedicated service definitions to best support AR/MR related tasks [9, 42, 149].



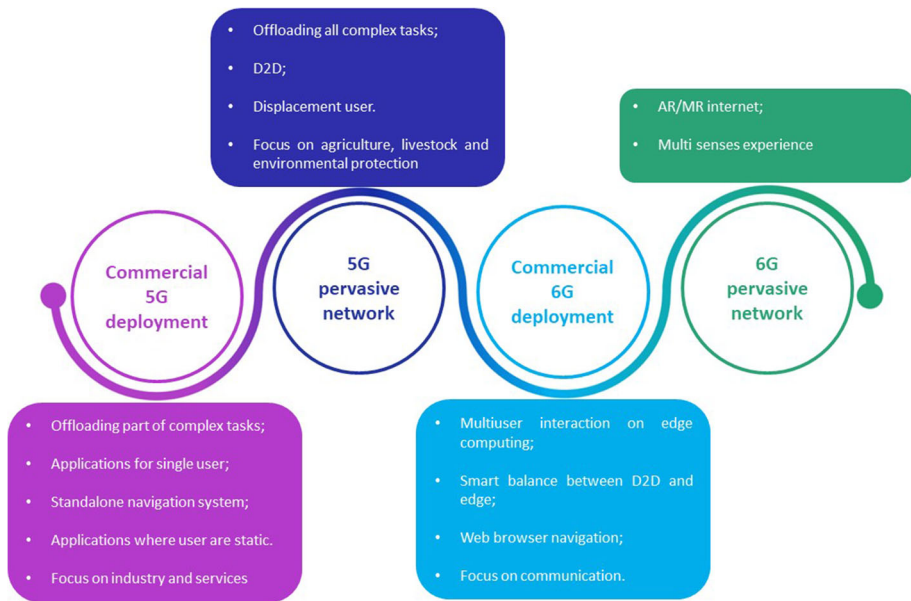

**Fig. 11** A roadmap for AR/MR regarding 5G and beyond networks

Current TCP and UDP protocols cannot guarantee a low upper bound of end-to-end latency and are not designed to utilize available network assets optimally. Therefore, they cannot meet the QoS requirements for AR/MR applications [145, 148].

For the future generation, a paradigm change to information-centering networking is expected to enable content, cache, and routing optimization and increase QoS for interpersonal communication for AR/MR applications [2, 75]. Furthermore, the 6G might face the challenge of supporting adaptive and customizable connectivity, e.g., using AI to predict the next AR/MR application pose [7].

6G networks are expected to offer GHz to THz frequency, increasing bandwidth and supporting data offload for real-time mapping, tracking, and object recognition in parallel tasks for AR/MR systems [26, 43]. This increase in latency and bandwidth will allow for a high-fidelity AR/MR interaction and even ubiquitous holographic information interaction [87, 105].

### 8.1 A roadmap for the future of augmented in mixed reality in mobile networks

This section proposes a development roadmap for AR/MR over 5G and beyond networks based on the studies we found. Figure 11 shows the expected evolution of the network technology.

As discussed in the previous sections, standard AR/MR support from 5G networks is to offload complex tasks, especially using edge servers or caches. Due to the complexity of data and privacy protection, the initial part of complex processes, e.g., tracking, can be offloaded. At the same time, pre-processing images and private data can be accomplished on the user's devices.

With the increment of 5G deployments and the development of dense networks, more high computational effort tasks can be offloaded. As a consequence, the devices can achieve

a reduction in energy consumption. In this scenario, a new opportunity for AR/MR headsets development is available, as the existing AR/MR hardware suffers from ergonomic aspects and battery autonomy [33, 66, 165, 173].

More ergonomic devices bring an opportunity for AR/MR to be one of the communication tools in the future. These applications can use D2D communication, allowing communication among users in the same space and interactions among users and smart things.

Additionally, studies of multisensorial experiences over 5G have identified that the network can achieve satisfactory QoE in stable scenarios [36, 152, 176]. However, there is no evidence that this scenario could be realized in commercial 5G networks. First, there is a lack of protocols to deliver multisensorial data [101]. Also, due to the network limitations to deal with changeable and unpredictable network conditions. [36].

We identified in 6G studies that the focus of such a generation network for AR/MR applications would be enhancing users' social interactions. From 6G networks, it is expected that users can interact simultaneously with each other together with the virtual environment [58]. This communication can encourage the creation of supporting technologies and facilities such as AR/MR-based web browsers. Furthermore, the web-based AR/MR approach overcomes the cross-platform and extensive provisioning limitations inherent in both device and app-based AR/MR applications [120].

With the higher bandwidth, lower latency, and higher reliability of 6G networks, digital twin models can be visualized and interacted with in real-time, using AR/MR [24]. This will enable users to experience and manipulate digital twin models, leading to enhanced collaboration [6]. Moreover, 6G technology will enable digital twins to be used in more complex and dynamic systems, such as smart cities, autonomous vehicles, and advanced manufacturing [100].

Finally, with massive coverage of 6G networks and cross-platform AR/MR navigation mode, a new web surfing approach much more immersive and haptic sensitive may be available to users. Thus, future devices will be able to receive and send a large amount of data, increasing the user experience to a new level by exploring users' senses (e.g., sight, hearing, and touch). Consequently, the multisensorial experience would make the virtual environment more realistic and integrated into the real scene.

## 9 Conclusions

This paper complements previous AR/MR surveys by compiling what and how is expected from AR/MR over 5G and beyond networks. Furthermore, the survey analyzes studies to expose how the related technologies have been combined with 5G networks and future generations of mobile networks.

While a comprehensive search for studies on AR/MR applications in mobile networks was conducted, it is important to acknowledge that there may still be a possibility that a few articles were missed during the literature review process. Additionally, the exclusion of conference proceedings may have impacted the overall comprehensiveness of this review. Moreover, it is crucial to note that this survey was conducted until the end of 2022, and any developments beyond that period were not considered. Therefore, these temporal limitations should be considered when interpreting this study's results.

The development of AR/MR applications that impose QoS requirements from mobile networks has been proposed since the 4G advent. However, before 5G, such a development could not meet the latency and bandwidth requirements of nowadays. Therefore, the

previous mobile networks would be best recommended for applications without high fps requirements.

From the first deployments of 5G networks, authors identified the possibility of offloading part of high computational resource tasks to be processed in more powerful servers. If those servers are located on the network edge, then edge-based architectures can meet AR/MR latency requirements. This can help organizations to develop AR/MR applications that offer improved performance and responsiveness.

Additionally, the possibility of offloading high computer demand tasks brings new opportunities to AR/MR hardware manufacturers. Hardware, especially HMD, should become smaller, lighter, and more ergonomic if the high computational effort tasks will no longer proceed internally. These future devices can stimulate AR/MR use in people's daily life.

However, the proposed architecture brings new challenges concerning traffic estimation, infrastructure cost, security, and privacy. Understanding these challenges can help telecommunication companies plan and develop effective infrastructure to make AR/MR ubiquitous and accessible.

Furthermore, this paper has identified an important gap in the current research, highlighting the lack of studies discussing the use of AR/MR applications on 5G networks in scenarios with high demand, fast handovers, and coverage instability. Despite the extensive research on the topic, no studies published until the end of 2022 have addressed these specific scenarios, which presents a valuable opportunity for future research.

Additionally, we analyze the tendencies toward AR/MR for future generations of mobile networks. Finally, a roadmap of the technologies is suggested based on the studies we found and the development tendencies we identified.

Based on the roadmap, it is expected that in a dense 5G network scenario, users will be able to use AR/MR in displacement scenarios, offload most of the complex processing and take advantage of D2D AR/MR communications.

Also, the roadmap analysis indicates that although AR/MR internet research and multisensorial experiences have been conducted in the 5G scenario, these use cases would probably be feasible beyond 5G networks. This is expected due to the lower latency and higher bandwidth that future networks will offer and the development of new protocols to support them.

**Funding** Open Access funding enabled and organized by Projekt DEAL. The last author would like to thank the Conselho Nacional de Desenvolvimento Científico e Tecnológico (CNPq) for partially supporting this research with reference 423521/2021-7 and the Fundação para a Ciência e a Tecnologia (FCT) with reference UIDB/50021/2020. The second author would like to thank the São Paulo Research Foundation (FAPESP), grant #2022/14503-3.

## Declarations

**Conflict of Interests** The authors of this manuscript declare no relationships with any companies, whose products or services may be related to the subject matter of the article

**Open Access** This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

## References

1. Abd El-atty SM, Gharseldien ZM (2013) On performance of HetNet with coexisting small cell technology. In: 6th Joint IFIP Wireless and Mobile Networking Conference (WMNC). IEEE, pp 1–8. <https://doi.org/10.1109/WMNC.2013.6549013>. <https://ieeexplore.ieee.org/document/6549013>
2. Ahmad H, Zubair Islam M, Ali R et al (2021) Intelligent stretch optimization in information centric networking-based tactile internet applications. *Appl Sci (Switzerland)* 11(16). <https://doi.org/10.3390/app11167351>
3. Akyildiz IF, Guo H (2022) Wireless communication research challenges for Extended Reality (XR). *ITU J Future Evol Technol* 3(1):1–15. <https://doi.org/10.52953/qgkv1321>
4. Akyildiz IF, Lee WY, Chowdhury KR (2009) CRAHNS: Cognitive radio ad hoc networks. *Ad Hoc Netw* 7(5):810–836. <https://doi.org/10.1016/j.adhoc.2009.01.001>
5. Alchalabi AE, Shirmohammadi S, Mohammed S et al (2021) Fair server selection in edge computing with  $q$ -value-normalized Action-Suppressed quadruple Q-Learning. *IEEE Trans Artif Intell* 2(6):519–527. <https://doi.org/10.1109/tai.2021.3105087>
6. Alokaily M, Bouachir O, Karray F et al (2022) Integrating digital twin and advanced intelligent technologies to realize the metaverse; Integrating digital twin and advanced intelligent technologies to realize the metaverse. *IEEE Consumer Electronics Magazine* PP. <https://doi.org/10.1109/MCE.2022.Doi>. <https://www.ieee.org/publications/rights/index.html>
7. Alraih S, Shayea I, Behjati M et al (2022) Revolution or evolution? technical requirements and considerations towards 6g mobile communications. *Sensors* 22(3). <https://doi.org/10.3390/s22030762>
8. Alyouf AL, Mstafa RJ (2022) AR-Assisted children book for smart teaching and learning of turkish alphabets. *Virtual Real Intell Hardware* 4(3):263–277. <https://doi.org/10.1016/j.vrih.2022.05.002>
9. Analysis T (2022) 6g and the internet of things: Topic analysis. *Journal of Industrial Integration and Management*. <https://doi.org/10.1142/s2424862222500038>
10. Antevski K, Giritli L, Bernardos CJ et al (2021) A 5G-Based eHealth monitoring and emergency response system: experience and lessons learned. *IEEE Access* 9:131420–131429. <https://doi.org/10.1109/ACCESS.2021.3114593>
11. Arunglabi R, Toding A, Rapa CI et al (2022) 5G technology in smart Healthcare and smart city development integration with deep learning architectures. *International Journal of Communication Networks and Information Security (IJCNIS)* 14(3):99–109. <https://doi.org/10.17762/ijcnis.v14i3.5575>. <https://www.ijcnis.org/index.php/ijcnis/article/view/5575>
12. Atherton S, Javed M, Webster SV et al (2013) Use of a mobile device app: a potential new tool for poster presentations and surgical education. *J Vis Commun Med* 36(1-2):6–10. <https://doi.org/10.3109/17453054.2013.790794>
13. Azuma R (1997) A survey of augmented reality. *Presence; Teleoperators and Virtual Environments* 4:355–385
14. Azuma R, Behringer R, Feiner S et al (2001) Recent advances in augmented reality. *IEEE Comput Graphics Appl* 21(6):1–27. <https://doi.org/10.4061/2011/908468>. <http://www.ncbi.nlm.nih.gov/pubmed/17691992>
15. Baashar Y, Alkaws G, Wan Ahmad WN et al (2023) Towards wearable augmented reality in healthcare: a comparative survey and analysis of Head-Mounted displays. *Int J Environ Res Public Health* 20(5):3940. <https://doi.org/10.3390/ijerph20053940>
16. Bansal G, Rajgopal K, Chamola V et al (2022) Healthcare in metaverse: a survey on current metaverse applications in healthcare. *IEEE Access* 10:119914–119946. <https://doi.org/10.1109/ACCESS.2020.3005641>. <https://doi.org/10.1109/ACCESS.2022.3219845>
17. Baranyi P, Csapó D, Budai T et al (2021) Introducing the concept of internet of digital reality – part i. *Acta Polytechnica Hungarica* 18(7):225–240. <https://doi.org/10.12700/APH.18.7.2021.7.12>
18. Batalla JM (2020) On analyzing video transmission over wireless WiFi and 5G C-Band in harsh IIot Environments. *IEEE Access* 8:118534–118541. <https://doi.org/10.1109/ACCESS.2020.3005641>
19. Bhattacharya A, De D (2021) SigSense: Mobile crowdsensing based incentive aware geospatial signal monitoring for base station installation recommendation using mixed reality game. 0123456789, Springer US. <https://doi.org/10.1007/s11277-021-09267-5>
20. Billinghurst M, Clark A, Lee G (2015) A survey of augmented reality. *Foundations and Trends® in Human–Computer Interaction* 8(2-3):73–272. <https://doi.org/10.1561/11000000049>. <http://www.nowpublishers.com/article/Details/HCI-049>
21. Billinghurst M, Kato H (2002) Collaborative augmented reality. *Commun ACM* 45(7):64–70. <https://doi.org/10.1145/514236.514265>

22. Buchholz K (2022) Where 5G technology has been deployed. <https://www.statista.com/chart/23194/5g-networks-deployment-world-map/>
23. Budgen D, Brereton P (2006) Performing systematic literature reviews in software engineering. In: Proceedings of the 28th international conference on software engineering, vol 45. ACM, New York, NY, USA, pp 1051–1052. <https://doi.org/10.1145/1134285.1134500>. <https://dl.acm.org/doi/10.1145/1134285.1134500>
24. Calandra D, Praticò FG, Cannavò A et al (2022) Digital twin- and extended reality-based telepresence for collaborative robot programming in the 6G perspective. *Digit Commun Netw*. <https://doi.org/10.1016/j.dcan.2022.10.007>
25. Cardoso LFdS, Zorzal ER (2018) An augmented reality review on production environments. In: 2018 20th Symposium on Virtual and Augmented Reality (SVR). IEEE, pp 143–149. <https://doi.org/10.1109/SVR.2018.00030>. <https://ieeexplore.ieee.org/document/8802441/>
26. Chakrabarti K (2021) Deep learning based offloading for mobile augmented reality application in 6G. *Comput Electric Eng* 95(September 2020):107381. <https://doi.org/10.1016/j.compeleceng.2021.107381>
27. Chang E, Kim HT, Yoo B (2020) Virtual reality sickness: A review of causes and measurements. *Int J Human-Comput Interact* 36(17):1658–1682. <https://doi.org/10.1080/10447318.2020.1778351>. <https://www.tandfonline.com/doi/full/10.1080/10447318.2020.1778351>
28. Checko A, Christiansen HL, Yan Y et al (2015) Cloud RAN for mobile networks - a technology overview. *IEEE Commun Surv Tutor* 17(1):405–426. <https://doi.org/10.1109/COMST.2014.2355255>
29. Chen S, Duinkharjav B, Sun X et al (2022) Instant reality: Gaze-contingent perceptual optimization for 3D virtual reality streaming. *IEEE Trans Vis Comput Graph* 28(5). <https://doi.org/10.1109/TVCG.2022.3150522>
30. Cheng Y (2020) Edge caching and computing in 5G for mobile augmented reality and haptic internet. *Comput Commun* 158(March):24–31. <https://doi.org/10.1016/j.comcom.2020.04.054>
31. Chettri L, Bera R (2020) A comprehensive survey on internet of things (IoT) toward 5G wireless systems. *IEEE Int Things J* 7(1):16–32. <https://doi.org/10.1109/JIOT.2019.2948888>
32. Chmielewski M, Sapiejewski K, Sobolewski M (2019) Application of augmented reality, mobile devices, and sensors for a combat entity quantitative assessment supporting decisions and situational awareness development. *Appl Sci (Switzerland)* 9(21). <https://doi.org/10.3390/app9214577>
33. Ciccone BA, Bailey SKT, Lewis JE (2021) The next generation of virtual reality: Recommendations for accessible and ergonomic design. *Ergonomics in design: The quarterly of human factors applications*, p 106480462110025. <https://doi.org/10.1177/10648046211002578>. <http://journals.sagepub.com/doi/10.1177/10648046211002578>
34. CoWomen (2019) Three women sitting around table using laptops photo – Free Furniture Image on Unsplash. <https://unsplash.com/photos/7Zy2KV76Mts>
35. Colman-Meixner C, Khalili H, Antoniou K et al (2019) Deploying a novel 5G-Enabled architecture on city infrastructure for ultra-high definition and immersive media production and broadcasting. *IEEE Trans Broadcast* 65(2):392–403. <https://doi.org/10.1109/TBC.2019.2901387>
36. Comsa IS, Trestian R, Ghinea G (2018) 360° Multimedial experience over next generation wireless networks - a reinforcement learning approach. In: 2018 10th International Conference on Quality of Multimedia Experience (QoMEX). IEEE, pp 1–6. <https://doi.org/10.1109/QoMEX.2018.8463409>
37. Costanza E, Kunz A, Fjeld M (2009) Mixed reality: A survey. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* 5440(LNCS(May 2014)):47–68. [https://doi.org/10.1007/978-3-642-00437-7\\_3](https://doi.org/10.1007/978-3-642-00437-7_3)
38. Dananjayan S, Raj GM (2020) 5G in healthcare: how fast will be the transformation? *Irish Journal of Medical Science* pp 3–7. <https://doi.org/10.1007/s11845-020-02329-w>
39. Dang TN, Kim K, Khan LU et al (2021) On-device computational caching-enabled augmented reality for 5G and beyond: A contract theory-based incentive mechanism. *IEEE Int Things J* 4662(c). <https://doi.org/10.1109/JIOT.2021.3080709>
40. Davison AJ, Reid ID, Molton ND et al (2007) MonoSLAM: Real-time single camera SLAM. *IEEE Trans Pattern Anal Mach Intell* 29(6):1052–1067. <https://doi.org/10.1109/TPAMI.2007.1049>. <https://academic.oup.com/aesa/article-lookup/doi/10.1603/AN10099> <http://ieeexplore.ieee.org/document/4160954/>
41. Dolezal J, Zeman T (2019) Introduction to the computation offloading from mobile devices to the edge of mobile network. *Adv Electric Electron Eng* 17(4):413–422. <https://doi.org/10.15598/aeec.v17i4.2695>
42. Duong TQ, Nguyen LD, Narottama B et al (2022) Quantum-inspired real-time optimization for 6G networks: opportunities, challenges, and the road ahead. *IEEE Open J Commun Soc* 3:1347–1359. <https://doi.org/10.1109/OJCOMS.2022.3195219>

43. El Mettiti A, Oumsis M (2022) A survey on 6G networks: vision, requirements, architecture, technologies and challenges. *Ingénierie des systèmes d information* 27(1):1–10. <https://doi.org/10.18280/isi.270101>
44. Elawady M, Sarhan A (2020) Mixed reality applications powered by IoE and edge computing: A survey. In: *Internet of things—Applications and future*. p 125–138. [https://doi.org/10.1007/978-981-15-3075-3\\_9](https://doi.org/10.1007/978-981-15-3075-3_9). [http://link.springer.com/10.1007/978-981-15-3075-3\\_9](http://link.springer.com/10.1007/978-981-15-3075-3_9)
45. Fizza M, Shah A (2016) 5G Technology: An overview of applications, prospects, challenges and beyond. In: *Proceedings of the IOARP International Conference on Communication and Networks (ICCN 2015)* (March 2016), pp 18–19. [http://ioarp.org/ioarp-adminpanel/upload/articles/1460357886\\_IDL-ICCN15-011.pdf](http://ioarp.org/ioarp-adminpanel/upload/articles/1460357886_IDL-ICCN15-011.pdf)
46. Fletcher S, Telecom NEC (2014) Cellular architecture for 5g. *IEEE Communications Magazine* (February), pp 122–130
47. Fourati H, Maaloul R, Chaari L (2021) A survey of 5G network systems: challenges and machine learning approaches, vol 12. Springer Berlin Heidelberg. <https://doi.org/10.1007/s13042-020-01178-4>
48. Fraga-Lamas P, Fernández-Caramés TM, Blanco-Novoa O et al (2018) A review on industrial augmented reality systems for the industry 4.0 shipyard. *IEEE Access* 6:13358–13375. <https://doi.org/10.1109/ACCESS.2018.2808326>. <https://ieeexplore.ieee.org/document/8298525/>
49. French AM, Risius M, Shim JP (2020) The interaction of virtual reality, blockchain, and 5g new radio: Disrupting business and society. *Commun Assoc Inf Syst* 46:603–618. <https://doi.org/10.17705/1CAIS.04625>
50. Garcia-Aviles G, Gramaglia M, Serrano P et al (2020) Experimenting with open source tools to deploy a multi-service and multi-slice mobile network. *Comput Commun* 150(August 2019):1–12. <https://doi.org/10.1016/j.comcom.2019.11.003>
51. Garcia-Aviles G, Gramaglia M, Serrano P et al (2020) Experimenting with open source tools to deploy a multi-service and multi-slice mobile network. *Comput Commun* 150(November 2019):1–12. <https://doi.org/10.1016/j.comcom.2019.11.003>
52. Gramaglia M, Pavón IL, Gringoli F et al (2018) Design and validation of a multi-service 5G network with QoE-aware orchestration. In: *Proceedings of the annual international conference on mobile computing and networking, MOBICOM*, pp 11–18. <https://doi.org/10.1145/3267204.3267216>
53. Gupta A, Jha RK (2015) A survey of 5G network: architecture and emerging technologies. *IEEE Access* 3:1206–1232. <https://doi.org/10.1109/ACCESS.2015.2461602>
54. Gupta R, Reebadiya D, Tanwar S (2021) 6G-enabled Edge Intelligence for Ultra-Reliable Low Latency Applications : Vision and Mission. *Comput Stand Interfaces* 77(December 2020):103521. <https://doi.org/10.1016/j.csi.2021.103521>
55. Gupta R, Tanwar S, Tyagi S et al (2019) Tactile internet and its applications in 5G era: a comprehensive review. *Int J Commun Syst* 32(14):1–49. <https://doi.org/10.1002/dac.3981>
56. Haibeh LA, Yagoub MC, Jarray A (2022) A survey on mobile edge computing infrastructure: design, resource management, and optimization approaches. *IEEE Access* 10:27591–27610. <https://doi.org/10.1109/ACCESS.2022.3152787>
57. Hamza R, Minh-Son D (2022) Research on privacy-preserving techniques in the era of the 5G applications. *Virt Real Intell Hardw* 4(3):210–222. <https://doi.org/10.1016/j.vrih.2022.01.007>
58. Han B, Pathak P, Chen S et al (2022) CoMIC: A collaborative mobile immersive computing infrastructure for conducting multi-user XR research. *IEEE Network*. <https://doi.org/10.1109/MNET.126.2200385>
59. Hernandez E (2012) Using GQM and TAM to evaluate StArt-a tool that supports Systematic review. *Clei Electronic Journal* 15(1):13
60. Hoeschele T, Dietzel C, Kopp D et al (2021) Importance of Internet Exchange Point (IXP) infrastructure for 5G: Estimating the impact of 5G use cases. *Telecommun Policy* 45(3):102091. <https://doi.org/10.1016/j.telpol.2020.102091>
61. Hong X, Wang J, Wang CX et al (2014) Cognitive radio in 5g: a perspective on energy-spectral efficiency trade-off. *IEEE Commun Mag* 52(7):46–53. <https://doi.org/10.1109/MCOM.2014.6852082>
62. Huang Z, Friderikos V (2022) Optimal proactive caching for multi-view streaming mobile augmented reality. *Future Int* 14(6). <https://doi.org/10.3390/fi14060166>
63. Hub i4.0 (2020) Realidade aumentada na construção civil - HUB i4.0. <https://www.hubi40.com.br/realidade-aumentada-na-construcao-civil/>
64. Iradier E, Abuin A, Cabrera R et al (2021) Advanced NOMA-based RRM schemes for broadcasting in 5G mmWave frequency bands. *IEEE Trans Broadcast*, pp 1–13. <https://doi.org/10.1109/TBC.2021.3128049>

65. Irlitti A, Piumsomboon T, Jackson D et al (2019) Conveying spatial awareness cues in xR collaborations. *IEEE Trans Vis Comput Graph* 25(11):3178–3189. <https://doi.org/10.1109/TVCG.2019.2932173>. <https://ieeexplore.ieee.org/document/8799015/>
66. Ito K, Tada M, Ujiike H et al (2021) Effects of the weight and balance of head-mounted displays on physical load. *Appl Sci* 11(15):6802. <https://doi.org/10.3390/app11156802>. <https://www.mdpi.com/2076-3417/11/15/6802>
67. Jang SB, Kim YG, Ko YW (2017) Mobile video communication based on augmented reality. *Multimed Tools Appl* 76(16):16893–16909. <https://doi.org/10.1007/s11042-016-3627-4>
68. Jedari B, Premsankar G, Illahi G et al (2021) Video caching, analytics, and delivery at the wireless edge: A survey and future directions. *IEEE Commun Surv Tutor* 23(1):431–471. <https://doi.org/10.1109/COMST.2020.3035427>. <https://ieeexplore.ieee.org/document/9252131/>
69. Jin A, Zhao S (2021) 5G-oriented virtual augmented reality scene construction and business information flow demonstration. *Mobile Networks and Applications*. <https://doi.org/10.1007/s11036-021-01814-5>
70. Joo HJ, Jeong HY (2021) A study on VAL platform for 5G network for large-capacity data transmission. *Journal of Supercomputing* (0123456789). <https://doi.org/10.1007/s11227-021-03700-z>
71. Jumani MA, Mehdi H, Hussain Z (2022) A detailed overview of 6g and related technologies. <https://doi.org/10.54614/electrica.2022.21069>
72. Jun SH, Kim JH (2017) 5G will popularize virtual and augmented reality: KT's trials for World's first 5G Olympics in Pyeongchang. *ACM International conference proceeding series*. <https://doi.org/10.1145/3154943.3154947>
73. Kanter T, Fors U, Rahmani R (2016) Immersive networking—a framework for virtual environments with augmented reality in human decision-making. *Int J Multimed Ubiquitous Eng* 11(6):43–60. <https://doi.org/10.14257/IJMUE.2016.11.6.05>
74. Khan MA, Baccour E, Chkribene Z et al (2022) A survey on mobile edge computing for video streaming: Opportunities and challenges. *IEEE Access* 10:120514–120550. <https://doi.org/10.1109/ACCESS.2022.3220694>
75. Khan LU, Saad W, Niyato D et al (2022) Digital-twin-enabled 6G: Vision, architectural trends, and future directions. *IEEE Commun Mag* 60(1):74–80. <https://doi.org/10.1109/MCOM.001.21143>
76. Khan D, Ullah S, Rabbi I (2015) Factors affecting the design and tracking of ARToolKit markers. *Comput Stand Interfaces* 41:56–66. <https://doi.org/10.1016/j.csi.2015.02.006>
77. Klein G, Murray D (2007) Parallel Tracking and Mapping for Small AR Workspaces. In: 2007 6th IEEE and ACM International symposium on mixed and augmented reality, vol 20. IEEE, pp 1–10. <https://doi.org/10.1109/ISMAR.2007.4538852>. <http://ieeexplore.ieee.org/document/4538852/>
78. Kowalczyk P, Siepmann (née Scheiben) C, Adler J (2021) Cognitive, affective, and behavioral consumer responses to augmented reality in e-commerce: A comparative study. *J Bus Res* 124:357–373. <https://doi.org/10.1016/j.jbusres.2020.10.050>. <https://linkinghub.elsevier.com/retrieve/pii/S0148296320307220>
79. LaPES (2018) Start. [http://lapes.dc.ufscar.br/tools/start\\_tool](http://lapes.dc.ufscar.br/tools/start_tool)
80. Li Y (2022) Analysis of artistic creation and design methods in universities based on augmented reality and 5G communication technology. *Security and Communication Networks*, p 2022. <https://doi.org/10.1155/2022/4005210>
81. Li B, Chen F, Peng Z et al (2021) Mobility-aware dynamic offloading strategy for C-V2X under multi-access edge computing. *Phys Commun* 49. <https://doi.org/10.1016/j.phycom.2021.101446>
82. Li JPO, Liu H, Ting DS et al (2021) Digital technology, tele-medicine and artificial intelligence in ophthalmology: A global perspective. *Prog Ret Eye Res* 82(September 2020):100900. <https://doi.org/10.1016/j.preteyeres.2020.100900>
83. Li C, Liu J, Zhang Q et al (2021) Efficient cooperative cache management for latency-aware data intelligent processing in edge environment. *Future Gener Comput Syst* 123:48–67. <https://doi.org/10.1016/j.future.2021.04.012>
84. Li J, Wu J, Xu G et al (2020) Integrating NFV and ICN for advanced Driver-Assistance systems. *IEEE Int Things J* 7(7):5861–5873. <https://doi.org/10.1109/JIOT.2019.2953988>
85. Li Y, Ye H, Ye F et al (2021) The current situation and future prospects of simulators in dental education. *J Med Int Res* 23(4). <https://doi.org/10.2196/23635>
86. Liang B, Gregory MA, Li S (2022) Multi-access Edge Computing fundamentals, services, enablers and challenges: A complete survey. *J Netw Comput Appl* 199(November 2021):103308. <https://doi.org/10.1016/j.jnca.2021.103308>
87. Liao S, Wu J, Li J et al (2021) Information-centric massive iot-based ubiquitous connected vr/ar in 6g: a proposed caching consensus approach. *IEEE Int Things J* 8(7):5172–5184. <https://doi.org/10.1109/JIOT.2020.3030718>

88. Lima JP, Roberto R, Simões F et al (2017) Markerless tracking system for augmented reality in the automotive industry. *Expert Syst Appl* 82:100–114. <https://doi.org/10.1016/j.eswa.2017.03.060>
89. Liu J, Qian K, Qin Z et al (2022) Cloud computing-enabled IIOT system for neurosurgical simulation using augmented reality data access. *Digit Commun and Netw* p 100310. <https://doi.org/10.1016/j.dcan.2022.04.019> <https://linkinghub.elsevier.com/retrieve/pii/S2352864822000682>
90. Liu T, Tai Y, Zhao C et al (2020) Augmented reality in neurosurgical navigation: a survey. *Int J Med Robot Comput Assisted Surg* 16(6):1–20. <https://doi.org/10.1002/rcs.2160>
91. Liu SJ, Tsai CW (2018) An effective search algorithm for hyper-dense deployment problem of 5G. *Procedia Comput Sci* 141:151–158. <https://doi.org/10.1016/j.procs.2018.10.161>. <https://linkinghub.elsevier.com/retrieve/pii/S1877050918318118>
92. Liu J, Zhang Q (2019) Code-partitioning offloading schemes in mobile edge computing for augmented reality. *IEEE Access* 7:11222–11236. <https://doi.org/10.1109/ACCESS.2019.2891113>
93. Lu L, Wang H, Liu P et al (2022) Applications of mixed reality technology in orthopedics surgery: a pilot study. *Front Bioeng Biotechnol* 10(February):1–15. <https://doi.org/10.3389/fbioe.2022.740507>
94. Lu Y, Zheng X (2020) 6G: A survey on technologies, scenarios, challenges, and the related issues. *J Ind Inf Integr* 19(July):100158. <https://doi.org/10.1016/j.jii.2020.100158>
95. Marsch P, Da Silva I, Bulakci O et al (2016) 5G Radio Access Network Architecture: Design Guidelines and Key Considerations. *IEEE Commun Mag* 54(11):24–32. <https://doi.org/10.1109/MCOM.2016.1600147CM>. <http://ieeexplore.ieee.org/document/7744805/>
96. Martin-Perez J, Cominardi L, Bernardos CJ et al (2019) Modeling mobile edge computing deployments for low latency multimedia services. *IEEE Trans Broadcast* 65(2):464–474. <https://doi.org/10.1109/TBC.2019.2901406>
97. Martins BR, Jorge JA, Zorzal ER (2021) Towards augmented reality for corporate training. *Interactive Learning Environments* pp 1–19. <https://doi.org/10.1080/10494820.2021.1879872>. <https://www.tandfonline.com/doi/full/10.1080/10494820.2021.1879872>
98. Mertes J, Lindenschmitt D, Amirrezaei M et al (2022) Evaluation of 5G-capable framework for highly mobile, scalable human-machine interfaces in cyber-physical production systems. *J Manuf Syst* 64:578–593. <https://doi.org/10.1016/j.jmsy.2022.08.009>
99. Microsoft (2020) Start designing and prototyping. <https://docs.microsoft.com/en-us/windows/mixed-reality/design/design>
100. Mihai S, Yaqoob M, Hung DV et al (2022) Digital twins: a survey on enabling technologies, challenges, trends and future prospects. *IEEE Commun Surv Tutor* 24(4):2255–2291. <https://doi.org/10.1109/COMST.2022.3208773>
101. Minopoulos G, Kokkonis G, Psannis KE et al (2019) A survey on haptic data over 5G networks. *Int J Future Gen Commun Netw* 12(2):37–54. <https://doi.org/10.33832/ijfgcn.2019.12.2.04>
102. Minopoulos G, Psannis KE (2022) Opportunities and challenges of tangible XR applications for 5G networks and beyond. *IEEE Consumer Electronics Magazine* 2248(c). <https://doi.org/10.1109/MCE.2022.3156305>
103. Morin DG, Perez P, Armada AG (2022) Toward the distributed implementation of immersive augmented reality architectures on 5G networks. *IEEE Commun Mag* 60(2):46–52. <https://doi.org/10.1109/MCOM.001.2100225>
104. Mourtzis D, Zogopoulos V, Katagis I et al (2018) Augmented reality based visualization of CAM Instructions towards industry 4.0 paradigm: A CNC Bending machine case study. *Procedia CIRP* 70:368–373. <https://doi.org/10.1016/j.procir.2018.02.045>
105. Nadir Z, Taleb T, Flinck H et al (2021) Immersive services over 5G and beyond mobile systems. *IEEE Netw*, pp 1–8. <https://doi.org/10.1109/MNET.121.2100172>
106. Orlosky J, Kiyokawa K, Takemura H (2017) Virtual and augmented reality on the 5G highway. *J Inf Process* 25:133–141. <https://doi.org/10.2197/ipsjip.25.133>
107. Osama M, Ateya AA, Ahmed Elsaid S et al (2022) Ultra-reliable low-latency communications: unmanned aerial vehicles assisted systems. <https://doi.org/10.3390/info13090430>
108. Osseiran A, Boccardi F, Braun V et al (2014) Scenarios for 5G mobile and wireless communications: the vision of the METIS project. *IEEE Commun Mag* 52(5):26–35. <https://doi.org/10.1109/MCOM.2014.6815890>
109. Panwar N, Sharma S, Singh AK (2016) A survey on 5G: The next generation of mobile communication. *Phys Commun* 18:64–84. <https://doi.org/10.1016/j.phycom.2015.10.006>
110. Park GS, Kim R, Song H (2022) Collaborative virtual 3D object modeling for mobile augmented reality streaming services over 5G networks. *IEEE Trans Mob Comput* 1233(c):1–16. <https://doi.org/10.1109/TMC.2022.3149543>
111. Patzold M (2019) 5G is coming around the corner [Mobile Radio]. *IEEE Veh Technol Mag* 14(1):4–10. <https://doi.org/10.1109/MVT.2018.2884042>



112. Peng J, Hou Y, Xu H et al (2022) Dynamic visual SLAM and MEC technologies for B5G: a comprehensive review. <https://doi.org/10.1186/s13638-022-02181-9>
113. Pham QV, Fang F, Ha VN et al (2020) A survey of multi-access edge computing in 5G and beyond: Fundamentals, technology integration, and state-of-the-art. *IEEE Access* 8:116974–117017. <https://doi.org/10.1109/ACCESS.2020.3001277>
114. Qian P, Huynh VSH, Wang N et al (2022) Remote production for live holographic teleportation applications in 5G networks. *IEEE Trans Broadcast* 68(2):451–463. <https://doi.org/10.1109/TBC.2022.3161745>. <https://ieeexplore.ieee.org/document/9745991/>
115. Qiao X, Ren P, Dustdar S et al (2018) A new era for web AR with mobile edge computing. *IEEE Int Comput* 22(4):46–55. <https://doi.org/10.1109/MIC.2018.043051464>
116. Qiao X, Ren P, Dustdar S et al (2019) Web AR: A Promising future for mobile augmented reality-state of the art, challenges, and insights. *Proc IEEE* 107(4):651–666. <https://doi.org/10.1109/JPROC.2019.2895105>
117. Qiao X, Ren P, Nan G et al (2019) Mobile web augmented reality in 5G and beyond: Challenges, opportunities, and future directions. *Chin Commun* 16(9):141–154. <https://doi.org/10.23919/JCC.2019.09.010>
118. Qureshi KN, Alhudaif A, Anwar RW et al (2021) Fully integrated data communication framework by using visualization augmented reality for internet of things networks. *Big Data* 9(4):253–264. <https://doi.org/10.1089/big.2020.0282>
119. Rahimi H, Picaud Y, Singh K et al (2021) Design and simulation of a hybrid architecture for edge computing in 5G and beyond. *IEEE Trans Comput* 70(8):1213–1224. <https://doi.org/10.1109/TC.2021.3066579>
120. Ranaweera P, Jurcut A, Liyanage M (2022) MEC-Enabled 5G use cases: A survey on security vulnerabilities and countermeasures. *ACM Comput Surv* 54(9):1–37. <https://doi.org/10.1145/3474552>
121. Rao SK, Prasad R (2018) Impact of 5G technologies on industry 4.0. *Wirel Pers Commun* 100(1):145–159. <https://doi.org/10.1007/s11277-018-5615-7>
122. Rauschnabel PA (2021) Augmented reality is eating the real-world! the substitution of physical products by holograms. *Int J Inf Manag* 57:102279. <https://doi.org/10.1016/j.ijinfomgt.2020.102279>
123. Ren P, Liu L, Qiao X et al (2022) Distributed edge system orchestration for web-based mobile augmented reality services. *IEEE Trans Serv Comput*. <https://doi.org/10.1109/TSC.2022.3190375>
124. Ren P, Qiao X, Huang Y et al (2020) Edge-assisted distributed DNN collaborative computing approach for mobile web augmented reality in 5G networks. *IEEE Netw* 34(2):254–261. <https://doi.org/10.1109/MNET.011.1900305>
125. Ren P, Qiao X, Huang Y et al (2020) Edge AR X5: An edge-assisted multi-user collaborative framework for mobile web augmented reality in 5G and beyond. *EEE Trans Cloud Comput* XX(X):1–17. <https://doi.org/10.1109/TCC.2020.3046128>
126. Ren P, Qiao X, Huang Y et al (2020) Edge AR X5: An edge-assisted multi-user collaborative framework for mobile web augmented reality in 5G and beyond. *IEEE Trans Cloud Comput* XX(X):1–1. <https://doi.org/10.1109/TCC.2020.3046128>. <https://ieeexplore.ieee.org/document/9300168/>
127. Ren P, Qiao X, Huang Y et al (2021) Fine-grained elastic partitioning for distributed DNN towards mobile web ar services in the 5G era. *IEEE Trans Serv Comput* XX(XX):1–14. <https://doi.org/10.1109/TSC.2021.3098816>
128. Rendon Schneir J, Bradford J, Ajibulu A et al (2021) A business case for 5G services in an industrial sea port area. *Telecommunications Policy* (October):102264. <https://doi.org/10.1016/j.telpol.2021.102264>
129. Rinaldi C, Franchi F, Marotta A et al (2021) On the exploitation of 5G Multi-Access edge computing for spatial audio in cultural heritage applications. *IEEE Access* 9:155197–155206. <https://doi.org/10.1109/access.2021.3128786>
130. Ripka P, Tipek A (eds.) (2007) *Modern sensors handbook*. ISTE, London, UK. <https://doi.org/10.1002/9780470612231>. <http://doi.wiley.com/10.1002/9780470612231>
131. Roesner F, Kohno T, Molnar D (2014) Security and privacy for augmented reality systems. *Commun ACM* 57(4):88–96. <https://doi.org/10.1145/2580723.2580730>. <https://dl.acm.org/doi/10.1145/2580723.2580730>
132. Sadeghi-Niaraki A, Choi SM (2020) A survey of marker-less tracking and registration techniques for health & Environmental applications to augmented reality and ubiquitous geospatial information systems. *Sensors* 20(10):2997. <https://doi.org/10.3390/s20102997>. <https://www.mdpi.com/1424-8220/20/10/2997>

133. Sadok D, Bezerra D, Dantas M et al (2021) Rbot: development of a robot-driven radio base station maintenance system. *International Journal of Intelligent Robotics and Applications* (0123456789). <https://doi.org/10.1007/s41315-021-00206-y>
134. Sathya V, Kala SM, Naidu K (2022) Heterogenous networks: From small cells to 5G NR-U. *Wireless Personal Communications*. <https://doi.org/10.1007/s11277-022-10070-z>
135. Sharma S, Singh AK (2011) On detecting termination in cognitive radio networks. *Proceedings of IEEE Pacific Rim International Symposium on Dependable Computing PRDC*, pp 71–78. <https://doi.org/10.1109/PRDC.2011.18>
136. Sharma SK, Woungang I, Anpalagan A et al (2020) Toward tactile internet in beyond 5G era: recent advances, current issues, and future directions. *IEEE Access* 8:56948–56991. <https://doi.org/10.1109/ACCESS.2020.2980369>
137. Shi L, Shi D, Zhang X et al (2020) 5G internet of radio light positioning system for indoor broadcasting service. *IEEE Trans Broadcast* 66(2):534–544. <https://doi.org/10.1109/TBC.2020.2981755>
138. Shin H, Jung J, Koo Y (2020) Forecasting the video data traffic of 5 G services in south korea. *Technol Forecast Soc Change* 153(September 2019):119948. <https://doi.org/10.1016/j.techfore.2020.119948>
139. Singh D, Akram SV, Singh R et al (2022) Building integrated photovoltaics 4.0: digitization of the photovoltaic integration in buildings for a resilient infra at large scale. *Electronics (Switzerland)* 11(17). <https://doi.org/10.3390/electronics11172700>
140. Siriwardhana Y, Porambage P, Liyanage M et al (2021) A survey on mobile augmented reality with 5G mobile edge computing: architectures, applications, and technical aspects. *IEEE Commun Surv Tutor* 23(2):1160–1192. <https://doi.org/10.1109/COMST.2021.3061981>
141. Siriwardhana Y, Porambage P, Ylianttila M et al (2020) Performance analysis of local 5G operator architectures for industrial internet. *IEEE Int Things J* 7(12):11559–11575. <https://doi.org/10.1109/JIOT.2020.3024875>
142. Song J, Song Q, Kang Y et al (2022) QoE-Driven distributed resource optimization for mixed reality in dynamic TDD systems. *IEEE Trans Commun* 70(11):7294–7306. <https://doi.org/10.1109/TCOMM.2022.3208113>
143. Song T, Tan X, Ren J et al (2022) DRAM: A DRL-based resource allocation scheme for MAR in MEC. *Digital Communications and Networks* p 101676. <https://doi.org/10.1016/j.dcan.2022.04.014>. <https://linkinghub.elsevier.com/retrieve/pii/S2352864822000633>
144. Sukhmani S, Sadeghi M, Erol-Kantarci M et al (2019) Edge caching and computing in 5G for mobile AR/VR and tactile internet. *IEEE Multimed* 26(1):21–30. <https://doi.org/10.1109/MMUL.2018.2879591>
145. Szczurek KA, Prades RM, Matheson E et al (2022) Mixed reality Human-Robot interface with adaptive communications congestion control for the teleoperation of mobile redundant manipulators in hazardous environments. *IEEE Access* 10:87182–87216. <https://doi.org/10.1109/ACCESS.2022.3198984>
146. Tai Y, Gao B, Li Q et al (2021) Trustworthy and intelligent COVID-19 diagnostic ioMT through XR and deep-learning-based clinic data access. *IEEE Int Things J* 8(21):15965–15976. <https://doi.org/10.1109/JIOT.2021.3055804>
147. Tai Y, Zhang L, Li Q et al (2022) Digital Twin-enabled IoMT System for Surgical Simulation using rAC-GAN. *IEEE Int Things J* 4662(c):1–1. <https://doi.org/10.1109/JIOT.2022.3176300>. <https://ieeexplore.ieee.org/document/9778207/>
148. Taleb T, Boudi A, Rosa L et al (2022) Towards supporting XR services: Architecture and enablers. *IEEE Internet of Things Journal*. <https://doi.org/10.1109/JIOT.2022.3222103>
149. Taleb T, Nadir Z, Flinck H et al (2021) Extremely interactive and Low-Latency services in 5G and beyond mobile systems. *IEEE Commun Stand Mag* 5(2):114–119. <https://doi.org/10.1109/MCOMSTD.001.2000053>
150. Tan Z, Qu H, Zhao J et al (2020) UAV-Aided edge/fog computing in smart IoT community for social augmented reality. *IEEE Int Things J* 7(6):4872–4884. <https://doi.org/10.1109/JIOT.2020.2971325>
151. Torres Vega M, Liaskos C, Abadal S et al (2020) Immersive interconnected virtual and augmented reality: A 5G and IoT perspective. *J Netw Syst Manag* 28(4):796–826. <https://doi.org/10.1007/s10922-020-09545-w>
152. Vargic R, Medvecký M, Londák J et al (2018) Advanced interactive multimedia delivery in 5G networks. In: *Interactive mobile communication technologies and learning*. p 421–430. [https://doi.org/10.1007/978-3-319-75175-7\\_42](https://doi.org/10.1007/978-3-319-75175-7_42). [http://link.springer.com/10.1007/978-3-319-75175-7\\_42](http://link.springer.com/10.1007/978-3-319-75175-7_42)
153. Vatalaro F, Ciccarella G (2020) A network paradigm for very high capacity mobile and fixed telecommunications ecosystem sustainable evolution. *IEEE Access* 8:135075–135090

154. Verde S, Marcon M, Milani S et al (2020) Advanced assistive maintenance based on augmented reality and 5g networking. *Sensors (Switzerland)* 20(24):1–16. <https://doi.org/10.3390/s20247157>
155. Vilela J, Castro J, Martins LEG et al (2017) Integration between requirements engineering and safety analysis: a systematic literature review. *J Syst Softw* 125:68–92. <https://doi.org/10.1016/j.jss.2016.11.031>
156. Virbela (2021) Virbela: A virtual world for work, education & events. <https://www.virbela.com>
157. Viswanathan H, Mogensen PE (2020) Communications in the 6G era. *IEEE Access* 8:57063–57074. <https://doi.org/10.1109/ACCESS.2020.2981745>
158. Wang Y, Li J, Huang L et al (2014) 5G mobile: Spectrum broadening to higher-frequency bands to support high data rates. *IEEE Veh Technol Mag* 9(3):39–46. <https://doi.org/10.1109/MVT.2014.2333694>
159. Wang C, Yu X, Xu L et al (2022) Energy efficient task scheduling based on traffic mapping in heterogeneous mobile edge computing: A green IoT perspective. *IEEE Transactions on Green Communications and Networking*. <https://doi.org/10.1109/TGCN.2022.3186314>
160. Wang W, Zhang Q (2014) Local cooperation architecture for self-healing femtocell networks. *IEEE Wirel Commun* 21(2):42–49. <https://doi.org/10.1109/MWC.2014.6812290>
161. Wersényi G (2022) Evaluation of the hololens for medical applications using 5G-connected mobile devices. *Infocommunications J* 14(4):11–17. <https://doi.org/10.36244/icj.2022.4.2>
162. Wu CW, Shieh MD, Lien JJJ et al (2022) Enhancing fan engagement in a 5G stadium with AI-based technologies and live streaming. *IEEE Syst J* 16(4):6590–6601. <https://doi.org/10.1109/JSYST.2022.3169553>
163. Yaakob M, Salameh AA, Mohamed O et al (2022) Enabling edge computing in 5G for mobile augmented reality. *Int J Interact Mob Technol* 16(14):23–30. <https://doi.org/10.3991/ijim.v16i14.32623>
164. Yagol P, Ramos F, Trilles S et al (2018) New trends in using augmented reality apps for smart city contexts. *ISPRS Int J Geo-Inf* 7(12):478. <https://doi.org/10.3390/ijgi7120478>. <https://www.mdpi.com/2220-9964/7/12/478>
165. Yan Y, Chen K, Xie Y et al (2019) The effects of weight on comfort of virtual reality devices. In: *Advances in ergonomics in design*. pp 239–248. [https://doi.org/10.1007/978-3-319-94706-8\\_27](https://doi.org/10.1007/978-3-319-94706-8_27). [http://link.springer.com/10.1007/978-3-319-94706-8\\_27](http://link.springer.com/10.1007/978-3-319-94706-8_27)
166. Yang SC (2012) Mobile applications and 4G wireless networks: a framework for analysis. *Campus-Wide Information Systems* 29(5):344–357. <https://doi.org/10.1108/10650741211275107>
167. Yang X, Shu L, Chen J et al (2021) A survey on smart agriculture: Development modes, technologies, and security and privacy challenges. *IEEE/CAA J Automatica Sinica* 8(2):273–302. <https://doi.org/10.1109/JAS.2020.1003536>. <https://ieeexplore.ieee.org/document/9269526/>
168. Yin Y, Zheng P, Li C et al (2023) A state-of-the-art survey on Augmented reality-assisted digital twin for futuristic human-centric industry transformation. *Robot Comput-Integ Manuf* 81:102515. <https://doi.org/10.1016/j.rcim.2022.102515>
169. Yung R, Khoo-Lattimore C (2019) New realities: a systematic literature review on virtual reality and augmented reality in tourism research. *Curr Issue Tour* 22(17):2056–2081. <https://doi.org/10.1080/13683500.2017.1417359>. <https://www.tandfonline.com/doi/full/10.1080/13683500.2017.1417359>
170. Zhang S, Li F, Zhao Y et al (2022) Mobile internet-based mixed-reality interactive telecollaboration system for neurosurgical procedures: Technical feasibility and clinical implementation. *Neurosurgical Focus* 52(6). <https://doi.org/10.3171/2022.3.FOCUS2249>
171. Zhang L, Wu X, Wang F et al (2022) Edge-based video stream generation for multi-party mobile augmented reality. *IEEE Transactions on Mobile Computing*. <https://doi.org/10.1109/TMC.2022.3232543>
172. Zhong L, Ji X, Wang Z et al (2022) A Q-Learning driven energy-aware multipath transmission solution for 5G media services. *IEEE Trans Broadcast*, pp 1–13. <https://doi.org/10.1109/TBC.2022.3147098>
173. Zhuang J, Liu Y, Jia Y et al (2019) User discomfort evaluation research on the weight and wearing mode of head-wearable device. In: *Advances in human factors in wearable technologies and game design*. pp 98–110. [https://doi.org/10.1007/978-3-319-94619-1\\_10](https://doi.org/10.1007/978-3-319-94619-1_10). [http://link.springer.com/10.1007/978-3-319-94619-1\\_10](http://link.springer.com/10.1007/978-3-319-94619-1_10)
174. Zorzal ER, Campos Gomes JM, Sousa M et al (2020) Laparoscopy with augmented reality adaptations. *J Biomed Inf* 107:103463. <https://doi.org/10.1016/j.jbi.2020.103463>. <https://linkinghub.elsevier.com/retrieve/pii/S1532046420300915>
175. da Silva MM, Guerreiro J (2020) On the 5G and beyond. *Appl Sci (Switzerland)* 10(20):1–12. <https://doi.org/10.3390/app10207091>

176. da Silveira AC, Santos CAS (2022) Ongoing challenges of evaluating mulsemmedia QoE. In: Proceedings of the 2nd Workshop on multisensory experiences (SensoryX 2022). Brazilian computing society. <https://doi.org/10.5753/sensoryx.2022.20005>
177. de Souza Cardoso L, Mariano F, Zorzal E (2020) A survey of industrial augmented reality. Computers and industrial engineering 139. <https://doi.org/10.1016/j.cie.2019.106159>
178. de Souza Cardoso LF, Mariano FCMQ, Zorzal ER (2020) Mobile augmented reality to support fuselage assembly. Comput Ind Eng 148(July):106712. <https://doi.org/10.1016/j.cie.2020.106712>

**Publisher's note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.