



# Correction to: Preparation of Plasma Sprayed GDC Electrolytes for Metal-Supported Solid Oxide Fuel Cells


Mengting Zhang<sup>1,2</sup> · Chen Song<sup>2</sup> · Kaisheng Lin<sup>2</sup> · Min Liu<sup>2</sup> · Ke Du<sup>2</sup> · Kui Wen<sup>2</sup> · Taikai Liu<sup>2</sup> · Jie Mao<sup>2</sup> · Xiaofeng Zhang<sup>2</sup> · Hanlin Liao<sup>3</sup> · Kesong Zhou<sup>2</sup>

© ASM International 2024

## Correction to: J Therm Spray Tech

<https://doi.org/10.1007/s11666-024-01751-1>

In the original article, Fig. 11 was published incorrectly.  
The figure should appear as follows:

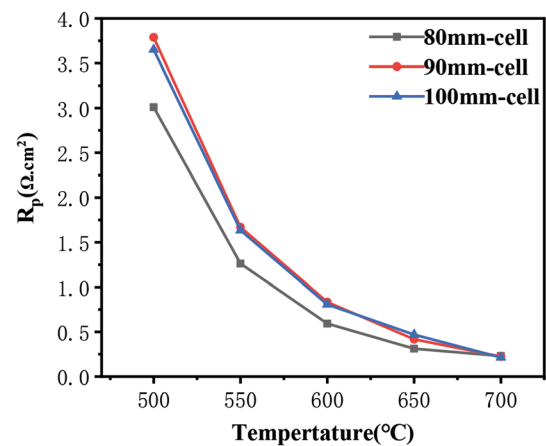

**Fig. 11** Polarization resistance as a function of temperature for the three cells

The original article has been updated.

The original article can be found online at <https://doi.org/10.1007/s11666-024-01751-1>.

✉ Chen Song  
phd.songchen@gmail.com

✉ Kaisheng Lin  
links168@163.com

<sup>1</sup> School of Materials and Energy, Guangdong University of Technology, Guangzhou 510006, China

<sup>2</sup> National Engineering Laboratory for Modern Materials Surface Engineering Technology, The Key Lab of Guangdong for Modern Surface Engineering Technology, Institute of New Materials, Guangdong Academy of Sciences, Guangzhou 510650, China

<sup>3</sup> Laboratoire Interdisciplinaire Carnot de Bourgogne, UMR6303 CNRS, Université de Technologie Belfort Montbéliard, 90100 Belfort, France

**Publisher's Note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.