

Erratum

Title: Chemo-Mechanical Manufacturing of Fused Silica by Combining Ultrasonic Vibration with Fixed-Abrasive Pellets
Authors: Yaguo Li, Yongbo Wu, Libo Zhou, Masakazu Fujimoto, Jian Wang, Qiao Xu, Shoichi Sasaki, and Masaaki Kemmochi
Int. J. Precis. Eng. Manuf., Vol. 13, No. 12, pp. 2163-2172, 2012

The figure 3 in page 2165 should be modified as below:

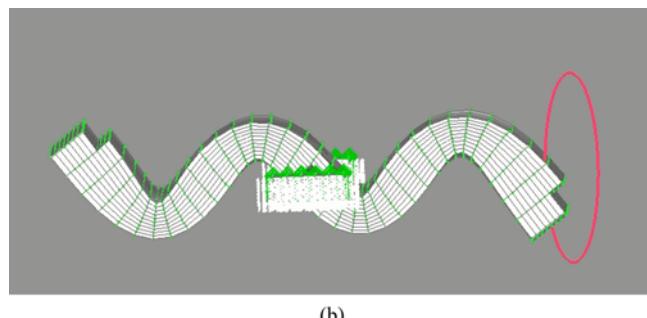


Fig. 3 (a) There exists a frequency at which both the L1 and B4 can be stimulated. The said frequency will be the frequency of the designed vibrator and the corresponding dimension will be the length of the bar.
(b) The dimensions of PZT and metallic elastic body is determined with the aid of software and the vibration of the designed vibrator is demonstrated