



# A new sudden death chart for the Weibull distribution under complexity

Osama H. Arif<sup>1,2</sup> · Muhammad Aslam<sup>1</sup>

Received: 7 July 2020 / Accepted: 1 March 2021 / Published online: 13 March 2021  
© The Author(s) 2021

## Abstract

This article presents a new control chart for monitoring reliability using sudden death testing under the neutrosophic statistics (NS). The average run lengths of the in-control and the out-of-control process have been determined for evaluating the quick detection ability for small and moderate shifts. For the industrial use, tables and figures have been presented for different parameters. The proposed control chart is efficient in comparison with the existing control chart under classical statistics and value addition in the toolkit of the quality control personnel.

**Keywords** Neutrosophic statistics · Life test · Weibull distribution · Average run length · Incomplete data

## Introduction

A control chart is an important tool of statistical process control for maintaining and improving the quality of the product to compete in the market [1]. An efficient control chart is one, which quickly indicates any special cause of variation in the process so that the engineers can take immediate action to remove the fault and avoid the burden of rework and defective items. This objective can only be achieved if we have complete, crisp, and authentic information/data about the manufacturing unit under study. Life testing experiments are very common in the statistical process control literature when a random sample of items is selected and put on testing for possible failure [2]. The sudden death testing is repeatedly applied by many parts manufacturers with the objective of reduced time of test, see [3]. In this technique, a sample of items is first spread in  $g$  groups with each group having  $r$  items. Sudden death testing in groups is preferred over the single tester as it reduces the testing cost of the product. Sudden death testing technique has

been explored by many quality control researchers including [3–6]. It is common to use the Weibull distribution for modeling lifetime phenomena. The density function of the Weibull distribution is typically written as

$$P(x) = \frac{m}{\lambda} \left(\frac{x}{\lambda}\right)^{m-1} \exp\left[-\left(\frac{x}{\lambda}\right)^m\right]; > 0, m \text{ and } \lambda > 0 \quad (1)$$

where  $\lambda$  and  $m$  are the scale and shape parameters, respectively. When the shape parameter is one, then this distribution tends to form the exponential distribution. The Weibull distribution has been explored by many quality control researchers including [7] developed life-testing sampling plan for the two-parameter Weibull distribution, [8] developed bootstrap control chart for Weibull percentiles, [3] developed a variables sampling plans for Weibull distributed lifetimes under sudden death testing, [9] given progressively censored reliability sampling plans for the Weibull distribution, [10] suggested a group acceptance sampling plan for truncated life test having Weibull distribution, [11] developed acceptance sampling plans for multi-stage process based on a time-truncated test for Weibull distribution.

Average run length (ARL) is a traditionally used technique in the literature of the control charts for evaluating the efficiency of the proposed control chart [1]. It is defined as the average number of samples when the process is in control until the process falsely shows an out-of-control signal and is denoted by  $ARL_0$ , see [12]. To keep the level of  $ARL_0$  at an acceptable level, it should be large enough. Another characteristic of ARL is used for the out-of-control

✉ Muhammad Aslam  
aslam\_ravian@hotmail.com

Osama H. Arif  
oharif@hotmail.com

<sup>1</sup> Department of Statistics, Faculty of Science, King Abdulaziz University, Jeddah 21551, Saudi Arabia

<sup>2</sup> Department of Mathematics, Faculty of Science, Jouf University, PO Box 2014, Sakaka 42421, Saudi Arabia

process which should be smaller enough for the efficient control chart scheme and is denoted by  $ARL_1$ .  $ARL$  for the evaluation of a better control chart scheme has been used by many authors including [13–24].

In practice, however, the observations about the manufacturing process are imprecise, incomplete, uncertain, or fuzzy [25]. Fuzzy-based control charts are applied in industry for the monitoring of the process when some observations/parameters are unknown or imprecise. The traditional control chart based on the assumption that all observations should be determined cannot be applied for the process monitoring when some values are fuzzy. Several authors contributed in this area by designing a fuzzy control chart for various situations, see for example, [26–34, 35]. More details can be seen in [36].

[37] developed the notion of neutrosophic statistics (NS) using the idea of neutrosophic logic was given by Smarandache [38]. The difference between fuzzy logic and neutrosophic logic can be seen in [39]. [40–42] discussed neutrosophic logic in a variety of fields. The neutrosophic statistics is applied when the data in hand are uncertain, imprecise, and indeterminate. The neutrosophic statistics is more informative than classical statistics. The neutrosophic statistics gives the information about the measure of indeterminacy. In addition, it gives the estimated values in the indeterminate intervals which are required in uncertain environment, see [37]. Several authors studied the neutrosophic statistics including [43] used the neutrosophic interval statistical numbers for expressions rock joint roughness coefficients, [44] studied the anisotropy for neutrosophic numbers of rock joint roughness using the neutrosophic statistics, [2] proposed a plan for neutrosophic statistics for testing of grouped product using the Weibull distribution, [45] developed the monitoring methodology for process variability using the neutrosophic statistics, [46] developed a sampling plan using the neutrosophic regression estimator. Recently, [47] introduced the NS in the area of statistical quality control. [45, 48, 49] proposed attribute np, X-bar, and variance control charts using NS, respectively. More details on NS-based control charts can be seen in [50, 51].

[2] designed the sudden death sampling plan using the NS. By exploring the literature and to the best of our knowledge, there is no work on the control sudden death control chart for monitoring the process of having incomplete, imprecise, and vague production data. In this paper, we will propose the sudden death control chart for monitoring the reliability when the lifetime of the product follows the Weibull distribution under the uncertainty environment. We will present some necessary measures to evaluate the performance of the proposed control chart under the neutrosophic statistical interval method (NSIM). We hope that the proposed control chart will be more adequate, adequate, and informative than the sudden death chart under classical

statistics in an uncertain environment. The rest of the paper is organized as follows: the design of the proposed chart is given in "Design of proposed control chart". The advantages of the proposed chart are given in "Advantages of the proposed control chart". In "Example", an example is given and some concluding remarks are given in the last section.

## Design of proposed control chart

Suppose that  $X_N = X + uI$ ;  $I \in [\text{inf}, \text{sup}]$  be a neutrosophic random variable having a variable  $X$  under classical statistics (determinate part) and  $uI$ ;  $I \in [\text{inf}, \text{sup}]$  is an indeterminate part. Let  $X_N \in [X_L, X_U]$  denote the lifetime of a part, where  $X_L$  is lower value of indeterminacy interval and  $X_U$  be the upper value of the indeterminacy interval, which follows, the neutrosophic Weibull distribution with neutrosophic scale parameter  $\lambda_N \in [\lambda_L, \lambda_U]$  and neutrosophic shape parameter  $m_N \in [m_L, m_U]$ , then the cumulative distribution function can be written as:

$$F(x_N) = 1 - \exp(-(\lambda_N x_N)^{m_N}); m_N \in [m_L, m_U], \lambda_N \in [\lambda_L, \lambda_U] \quad (2)$$

The operational procedure of the proposed neutrosophic control chart for monitoring reliability using sudden death testing under Weibull distribution is stated as follows:

**Step-1** Select a random sample of size  $n_N$ ;  $n_N \in [n_L, n_U]$  having neutrosophic numbers from a manufacturing process and distribute  $r_N$ ;  $r_N \in [r_L, r_U]$  items into  $g_N$ ;  $g_N \in [g_L, g_U]$  groups having  $n_N = r_N g_N$ .

**Step-2** Perform sudden death testing and detect  $Y_{iN}$ , the time to the first failure from the  $i$ th group ( $i = 1, 2, \dots, g_N$ ) and compute the value  $v_N = \sum_{i=1}^{g_N} Y_{iN}^{m_N}$ ;  $v_N \in [v_L, v_U]$  and convert it to  $v_N^* = v_N^{1/3}$ ;  $v_N^* \in [v_L^*, v_U^*]$ .

**Step-3** Plot  $v_N^*$  on the control chart. Declare the process in-control if  $LCL_N^{1/3} < v_N^* < UCL_N^{1/3}$ . If  $v_N^* \leq LCL_N^{1/3}$  or  $v_N^* \geq UCL_N^{1/3}$ , then declare the process out-of-control. Two control limits, namely  $LCL_N^{1/3}$ ;  $LCL_N^{1/3} \in [LCL_L^{1/3}, LCL_U^{1/3}]$  and  $UCL_N^{1/3}$ ;  $UCL_N^{1/3} \in [UCL_L^{1/3}, UCL_U^{1/3}]$ , for the proposed control chart have been constructed.

Following Jun et al. [3], the quantity  $v_N \in [v_L, v_U]$  follows the neutrosophic Weibull distribution with shape parameter  $g_N \in [g_L, g_U]$  and scale parameter  $r_N \lambda_N^{m_N}$ . For developing symmetric Shewhart-type control limits, we must transform  $v_N \in [v_L, v_U]$  into a random variable having a neutrosophic symmetric distribution. [52] mentioned that transformation of  $v_N^* = v_N^{1/3}$  leads to an approximately neutrosophic normal distribution with neutrosophic mean

$$\mu_{v^*N} = \frac{(r_N \lambda_{0N}^{m_N})^{1/3} \Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)}; \mu_{v^*N} \in [\mu_{v^*L}, \mu_{v^*U}] \quad (3)$$

And neutrosophic variance

$$\sigma_{v^*N}^2 = \frac{(r_N \lambda_{0N}^{m_N})^{2/3} \Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - (\mu_{v^*N})^2; \sigma_{v^*N}^2 \in [\sigma_{v^*L}^2, \sigma_{v^*U}^2] \quad (4)$$

where  $\Gamma_N(x)$  denotes the neutrosophic gamma function.

Therefore, the control limits for the proposed control chart are given as:

$$LCL_N = \frac{(r_N \lambda_{0N}^{m_N})^{1/3} \Gamma(g_N + 1/3)}{\Gamma_N(g_N)} - k_N \sqrt{\frac{(r_N \lambda_{0N}^{m_N})^{2/3} \Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - (\mu_{v^*N})^2} \quad (5)$$

$$LCL_N^{1/3} = r_N \lambda_{0N}^{m_N} \left\{ \frac{\Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)} - k_N \sqrt{\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - \left(\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)}\right)^2} \right\} \quad (6)$$

$$UCL_N = \frac{(r_N \lambda_{0N}^{m_N})^{1/3} \Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)} + k_N \sqrt{\frac{(r_N \lambda_{0N}^{m_N})^{2/3} \Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - (\mu_{v^*N})^2} \quad (7)$$

$$UCL_N^{1/3} = r_N \lambda_{0N}^{m_N} \left\{ \frac{\Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)} + k_N \sqrt{\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - \left(\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)}\right)^2} \right\} \quad (8)$$

Note here that  $k_N \in [k_L, k_U]$  is neutrosophic control limits coefficient and  $\lambda_{0N}$  is the neutrosophic scale parameter of the in-control process.

For the proposed control chart, the process is declared to be out-of-control if  $v_N^* \langle LCL_N^{1/3} \text{ or } v_N^* \rangle UCL_N^{1/3}$ . Therefore, the probability that the process is declared as out-of-control when the process is actually in-control is given as follows:

$$P_{outN}^0 = P\{v_N^* \langle LCL_N^{1/3} | \lambda_{0N} \rangle\} + P\{v_N^* > UCL_N^{1/3} | \lambda_{0N} \rangle\} \quad (9)$$

where

$$P\{v_N^* < LCL_N^{1/3} | \lambda_{0N} \rangle\} = P\{2r_N \lambda_{0N}^{m_N} v_N^* \langle 2r_N \lambda_{0N}^{m_N} LCL_N^{1/3} | \lambda_{0N} \rangle\}$$

or

$$P\{v_N^* < LCL_N^{1/3} | \lambda_{0N} \rangle\} = G_{2gN} \left( 2(r_N \lambda_{0N}^{m_N})^2 \left\{ \frac{\Gamma_N(g_N + 1/3)}{\Gamma(g_N)} - k_N \sqrt{\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - \left(\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)}\right)^2} \right\} \right)$$

and

$$P\{v_N^* > UCL_N^{1/3} | \lambda_{0N} \rangle\} = 1 - G_{2gN} \left( 2(r_N \lambda_{0N}^{m_N})^2 \left\{ \frac{\Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)} + k_N \sqrt{\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - \left(\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)}\right)^2} \right\} \right)$$

So, the average run length (ARL) using the neutrosophic statistical interval method (NSIM) is known as the neutrosophic average run length (NARL) is denoted by  $ARL_N$  which was introduced by [45] as follows:

$$ARL_{0N} = \frac{1}{P_{outN}^0}; ARL_{0N} \in [ARL_{0L}, ARL_{0U}] \quad (10)$$

When the process faces a shift, then the NARL is denoted by  $ARL_{1N}$ , then

$$P_{out1N}^0 = P\{v_N^* \langle LCL_N^{1/3} | \lambda_{1N} = c\lambda_{0N} \rangle\} + P\{v_N^* > UCL_N^{1/3} | \lambda_{1N} = c\lambda_{0N} \rangle\} \quad (11)$$

where

$$P\{v_N^* < LCL_N^{1/3} | \lambda_{0N} \rangle\} = P\{2r_N \lambda_{1N}^{m_N} v_N^* \langle 2r_N \lambda_{1N}^{m_N} LCL_N^{1/3} | \lambda_{1N} \rangle\}$$

or

$$P\{v_N^* < LCL_N^{1/3} | \lambda_{1N} \rangle\} = G_{2gN} \left( 2c^{m_N} r_N^2 \lambda_{0N}^{2m_N} \left\{ \frac{\Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)} - k_N \sqrt{\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - \left(\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)}\right)^2} \right\} \right)$$

and

$$P\{v_N^* > UCL^3|\lambda_1\} = 1 - G_{2g_N} \left( 2c^{m_N} r_N^2 \lambda_{0N}^{2m_N} \left\{ \frac{\Gamma_N(g_N + 1/3)}{\Gamma_N(g_N)} + k_N \sqrt{\frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} - \left( \frac{\Gamma_N(g_N + 2/3)}{\Gamma_N(g_N)} \right)^2} \right\} \right)$$

Therefore, the neutrosophic average run length for the shifted process is given by

$$ARL_{IN} = \frac{1}{P\{v_N^* \leq LCL_N^{1/3} | \lambda_{1N} = c\lambda_{0N}\} + P\{v_N^* > UCL^3 | \lambda_{1N} = c\lambda_{0N}\}}; \quad ARL_{IN} \in [ARL_{IL}, ARL_{IU}] \tag{12}$$

Let  $d_{0N} \in [d_{0L}, d_{0U}]$  denotes the specified NARL. The values of  $k_N \in [k_L, k_U]$  will be determined such that  $ARL_{0N} \in [ARL_{0L}, ARL_{0U}]$  should be very close to  $d_{0N} \in [d_{0L}, d_{0U}]$ . The values of  $ARL_{IN} \in [ARL_{IL}, ARL_{IU}]$  for various values of  $m_N \in [m_L, m_U]$ ,  $r_N \in [5, 5]$ ,  $\lambda_N \in [\lambda_L, \lambda_U]$  and  $d_{0N} \in [d_{0L}, d_{0U}]$  are determined and are shown in Tables 1, 2, 3 and 4. From Tables 1, 2, 3 and 4, we note the following trend in neutrosophic parameters.

1. For all other the same neutrosophic parameters, the values of  $ARL_{IN} \in [ARL_{IL}, ARL_{IU}]$  increase

**Table 1** The values of NARL when  $r_N \in [5, 5]$ ,  $m_N \in [2, 2.1]$  and various  $ARL_{IN}$

$k_N$	[2.746493, 3.548525]	[2.848831, 3.636265]	[2.925756, 3.938605]
$\lambda_N$	[0.45, 0.55]	[0.45, 0.55]	[0.45, 0.55]
$g_N$	[4, 6]	[3, 6]	[4, 8]
$m_N$	[2, 2.1]	[2, 2.1]	[2, 2.1]
$c$	ARL <sub>N</sub>		
1.0	[200.33, 215.34]	[306.14, 304.81]	[372.56, 374.62]
1.1	[181.79, 85.53]	[342.51, 118.82]	[343.12, 117.25]
1.2	[106.04, 38.73]	[230.25, 52.72]	[195.8, 43.99]
1.3	[62.52, 19.64]	[149.42, 26.17]	[113.37, 19.31]
1.4	[38.84, 11.01]	[100.15, 14.33]	[69.14, 9.74]
1.5	[25.33, 6.74]	[69.4, 8.56]	[44.22, 5.54]
1.6	[17.25, 4.46]	[49.55, 5.53]	[29.5, 3.52]
1.7	[12.21, 3.16]	[36.32, 3.83]	[20.44, 2.45]
1.8	[8.95, 2.39]	[27.27, 2.82]	[14.65, 1.85]
1.9	[6.77, 1.9]	[20.92, 2.19]	[10.83, 1.51]
2.0	[5.28, 1.59]	[16.36, 1.79]	[8.23, 1.3]
2.5	[2.15, 1.06]	[6.1, 1.09]	[2.96, 1.01]
3.0	[1.35, 1]	[3.09, 1.01]	[1.64, 1]
4.0	[1.02, 1]	[1.45, 1]	[1.06, 1]
5.0	[1]	[1.09, 1]	[1]
6.0	[1]	[1.01, 1]	[1]

**Table 2** The values of NARL when  $r_N \in [5, 5]$ ,  $m_N \in [0.85, 0.95]$  and various  $ARL_{IN}$

$k_N$	[2.470595, 3.771832]	[2.507942, 3.831339]	[2.520868, 3.858911]
$\lambda_N$	[0.45, 0.55]	[0.45, 0.55]	[0.45, 0.55]
$g_N$	[1, 3]	[1, 3]	[1, 3]
$m_N$	[0.85, 0.95]	[0.85, 0.95]	[0.85, 0.95]
$c$	ARL <sub>N</sub>		
1.0	[205.79, 211.75]	[315.48, 317.88]	[371.48, 387.03]
1.1	[189.82, 165.16]	[290.97, 247.16]	[342.61, 300.52]
1.2	[176.32, 131.88]	[270.26, 196.75]	[318.22, 238.91]
1.3	[164.76, 107.4]	[252.52, 159.75]	[297.32, 193.72]
1.4	[154.73, 88.95]	[237.13, 131.9]	[279.2, 159.74]
1.5	[145.94, 74.74]	[223.65, 110.5]	[263.33, 133.65]
1.6	[138.18, 63.6]	[211.74, 93.74]	[249.3, 113.23]
1.7	[131.26, 54.71]	[201.13, 80.41]	[236.8, 97.01]
1.8	[125.06, 47.54]	[191.62, 69.66]	[225.6, 83.92]
1.9	[119.47, 41.66]	[183.03, 60.87]	[215.49, 73.24]
2.0	[114.39, 36.8]	[175.25, 53.61]	[206.31, 64.42]
2.5	[94.72, 21.72]	[145.06, 31.2]	[170.76, 37.26]
3.0	[81.19, 14.38]	[124.3, 20.36]	[146.31, 24.17]
4.0	[63.69, 7.80]	[97.45, 10.76]	[114.68, 12.62]
5.0	[52.77, 5.05]	[80.7, 6.79]	[94.96, 7.88]
6.0	[45.27, 3.66]	[69.19, 4.8]	[81.4, 5.51]

when  $\lambda_N \in [\lambda_L, \lambda_U]$  increases from  $\lambda_N \in [0.5, 0.5]$  to  $\lambda_N \in [1, 1]$ .

2. For all other the same neutrosophic parameters, the values of  $ARL_{IN} \in [ARL_{IL}, ARL_{IU}]$  decrease when  $\lambda_N \in [\lambda_L, \lambda_U]$  increases from  $\lambda_N \in [1.5, 1.5]$  to  $\lambda_N \in [2.0, 2.0]$ .
3. From the above observations, we note the increasing the trend in  $ARL_{IN} \in [ARL_{IL}, ARL_{IU}]$  when  $\lambda_N \in [\lambda_L, \lambda_U] \leq 1$  and decreasing trend when  $\lambda_N \in [\lambda_L, \lambda_U] > 1$ .
4. From these Tables 1, 2, 3 and 4, it can be seen that the value of  $ARL_N$  decreases as the shifts from 1.0 to 6.0 increases.

The following algorithm is used to find the values of  $k_N \in [k_L, k_U]$  and  $ARL_{IN} \in [ARL_{IL}, ARL_{IU}]$ .

**Step-1:** determine the suitable range of  $k_N \in [k_L, k_U]$  and prefix the values of  $d_{0N} \in [d_{0L}, d_{0U}]$ ,  $m_N \in [m_L, m_U]$  and  $\lambda_N \in [\lambda_L, \lambda_U]$ .

**Step-2:** Determine the values  $k_N \in [k_L, k_U]$  such that  $ARL_{0N} \geq d_{0N}$ . During the simulation, we note that several combinations are available which satisfy the given condition. Select those values of  $k_N \in [k_L, k_U]$ , where  $ARL_{0N} \in [ARL_{0L}, ARL_{0U}]$  is very close to  $d_{0N} \in [d_{0L}, d_{0U}]$ .

**Table 3** The values of NARL when  $r_N \in [5, 5]$ ,  $m_N \in [1.45, 1.55]$  and various  $ARL_{1N}$

$k_N$	[2.366358, 3.433075]	[2.412716, 3.820856]	[2.981687, 3.86765]
$\lambda_N$	[0.45, 0.55]	[0.45, 0.55]	[0.45, 0.55]
$g_N$	[1, 3]	[1, 4]	[2, 4]
$m_N$	[1.45, 1.55]	[1.45, 1.55]	[1.45, 1.55]
$c$	$ARL_N$		
1.0	[207.58, 210.12]	[304.71, 301.92]	[378.51, 387.3]
1.1	[181.24, 140.24]	[266.06, 180.12]	[289.21, 229.92]
1.2	[159.87, 97.47]	[234.67, 113.53]	[226.43, 144.18]
1.3	[142.42, 70.1]	[209.02, 74.97]	[180.95, 94.7]
1.4	[127.96, 51.91]	[187.78, 51.52]	[147.15, 64.72]
1.5	[115.82, 39.43]	[169.95, 36.66]	[121.49, 45.79]
1.6	[105.52, 30.63]	[154.81, 26.89]	[101.63, 33.39]
1.7	[96.68, 24.26]	[141.83, 20.26]	[86.01, 25.01]
1.8	[89.03, 19.56]	[130.59, 15.64]	[73.54, 19.19]
1.9	[82.36, 16.01]	[120.78, 12.33]	[63.46, 15.04]
2.0	[76.49, 13.3]	[112.16, 9.92]	[55.21, 12.02]
2.5	[55.49, 6.25]	[81.29, 4.22]	[30.41, 4.96]
3.0	[42.71, 3.63]	[62.52, 2.41]	[18.94, 2.73]
4.0	[28.32, 1.85]	[41.37, 1.33]	[9.29, 1.42]
5.0	[20.63, 1.31]	[30.07, 1.08]	[5.56, 1.11]
6.0	[15.96, 1.11]	[23.21, 1.01]	[3.78, 1.02]

**Table 4** The values of NARL when  $r_N \in [5, 5]$ ,  $m_N \in [2.1, 2.3]$  and various  $ARL_{1N}$

$k_N$	[2.785936, 3.654638]	[2.39096, 3.434913]	[2.418024, 3.773643]
$\lambda_N$	[0.55, 0.65]	[0.55, 0.65]	[0.55, 0.65]
$g_N$	[2, 4]	[1, 3]	[1, 4]
$m_N$	[2.1, 2.3]	[2.1, 2.3]	[2.1, 2.3]
$c$	$ARL_N$		
1.0	[205.3, 206.33]	[300.76, 302.71]	[379.18, 372.29]
1.1	[139.68, 97.49]	[251.72, 165.29]	[317.96, 172.57]
1.2	[98.53, 50.47]	[210.24, 96.18]	[265.58, 87.46]
1.3	[71.68, 28.28]	[177.83, 59.11]	[224.61, 47.88]
1.4	[53.54, 16.99]	[152.27, 38.09]	[192.31, 28.04]
1.5	[40.93, 10.86]	[131.8, 25.59]	[166.44, 17.44]
1.6	[31.93, 7.33]	[115.16, 17.85]	[145.41, 11.44]
1.7	[25.36, 5.21]	[101.45, 12.87]	[128.09, 7.88]
1.8	[20.46, 3.87]	[90.03, 9.57]	[113.66, 5.68]
1.9	[16.76, 3]	[80.42, 7.31]	[101.51, 4.25]
2.0	[13.9, 2.41]	[72.26, 5.73]	[91.2, 3.31]
2.5	[6.43, 1.26]	[45.42, 2.33]	[57.27, 1.47]
3.0	[3.65, 1.03]	[31.13, 1.42]	[39.21, 1.09]
4.0	[1.79, 1]	[17.24, 1.03]	[21.66, 1]
5.0	[1.25, 1]	[10.98, 1]	[13.75, 1]
6.0	[1.07, 1]	[7.66, 1]	[9.54, 1]

**Step-3:** Using the selected values of  $k_N \in [k_L, k_U]$ , determine the values of  $ARL_{1N} \in [ARL_{1L}, ARL_{1U}]$  for various  $c$ .

### Advantages of the proposed control chart

In this section, we will discuss the advantages of the proposed control chart under neutrosophic statistics over the existing control chart under classical statistics proposed by [53]. [43, 44] mentioned that a method which provides the output in indeterminate interval under uncertainty is known as the most an effective and adequate method. To compare the proposed chart with [53], we will fix the same values of the control chart parameters. The values of NARL of the proposed control chart and [53] chart are shown in Table 5 for various values of control chart parameters.


From Table 5, it can be noted that all values of [53] chart are within the indeterminacy interval of the proposed control chart. The NARL values of the proposed control chart become the same as in [53] if no uncertain observation is recorded in the data. For example, when  $c = 1.1$  and  $\lambda_N \in [2, 2]$ , the indeterminacy interval of NARL for the proposed chart is from 172nd sample to the 317th sample. It means that one can expect that the proposed control chart indicates that on average, the process will be shifted between 172nd to 317th samples. On the other hand, [53] indicates that the first out-of-control will be detected at the 317th sample. From this study, it can be seen that the proposed chart gives smaller values of NARL as compared to the existing chart. In addition, from this comparison, it is clear that the proposed control chart gives the results in indeterminate interval; therefore,

**Table 5** The comparison in NARL

c	NARL			ARL		
	Proposed chart when $\lambda = 1.0$	Proposed chart when $\lambda = 1.5$	Proposed chart when $\lambda = 2.0$	Existing chart when $\lambda = 1.0$	Existing chart when $\lambda = 1.5$	Existing chart when $\lambda = 2.0$
1.0	[371.48, 387.03]	[378.51, 387.3]	[379.18, 372.29]	371.48	378.51	379.18
1.1	[342.61, 300.52]	[289.21, 229.92]	[317.96, 172.57]	342.61	289.21	317.96
1.2	[318.22, 238.91]	[226.43, 144.18]	[265.58, 87.46]	318.22	226.43	265.58
1.3	[297.32, 193.72]	[180.95, 94.7]	[224.61, 47.88]	297.32	180.95	224.61
1.4	[279.2, 159.74]	[147.15, 64.72]	[192.31, 28.04]	279.2	147.15	192.31
1.5	[263.33, 133.65]	[121.49, 45.79]	[166.44, 17.44]	263.33	121.49	166.44
1.6	[249.3, 113.23]	[101.63, 33.39]	[145.41, 11.44]	249.3	101.63	145.41
1.7	[236.8, 97.01]	[86.01, 25.01]	[128.09, 7.88]	236.8	86.01	128.09
1.8	[225.6, 83.92]	[73.54, 19.19]	[113.66, 5.68]	225.6	73.54	113.66
1.9	[215.49, 73.24]	[63.46, 15.04]	[101.51, 4.25]	215.49	63.46	101.51
2.0	[206.31, 64.42]	[55.21, 12.02]	[91.2, 3.31]	206.31	55.21	91.2
2.5	[170.76, 37.26]	[30.41, 4.96]	[57.27, 1.47]	170.76	30.41	57.27
3.0	[146.31, 24.17]	[18.94, 2.73]	[39.21, 1.09]	146.31	18.94	39.21
4.0	[114.68, 12.62]	[9.29, 1.42]	[21.66, 1]	114.68	9.29	21.66
5.0	[94.96, 7.88]	[5.56, 1.11]	[13.75, 1]	94.96	5.56	13.75
6.0	[81.4, 5.51]	[3.78, 1.02]	[9.54, 1]	81.4	3.78	9.54

it is flexible, informative, and adequate and concurs with the theory of [43, 44]. Hence, the proposed control chart under neutrosophic statistics is a better alternative of [53] chart under classical statistics when there is Neutrosophy in the data.

Now, we present the efficiency of the proposed control chart over [53] using the simulated data. Using the neutrosophic Weibull distribution, the neutrosophic data were generated in which the first 20 observations belong to the in-control process while the next 20 observations from the shifted process with  $c = 2.0$ . Now according to Table 3,  $ARL_{IN} \in [55.21, 12.02]$  when  $k_N \in [2.981687, 3.86765]$ ,  $\lambda_N \in [0.45, 0.55]$ ,  $g_N \in [2, 4]$  and  $m_N \in [1.45, 1.55]$ . According to the proposed chart, it can be expected a shift between 55th sample and 12th sample. The values of statistic  $v_N^* \in [v_L^*, v_U^*]$  are plotted in Fig. 1 for the proposed chart and in Fig. 2 for [53] chart under classical statistics. We note from Fig. 1 that the 29th sample is at the neutrosophic lower limit which indicates that the process has shifted. From the figure, it can be seen that all plotting values are within the control limits and do not show any shift in the process. From Figs. 1, 2, it is clear that the proposed control chart detects a shift in the process at the 29th sample while the existing control chart indicates that the process is an in-control state. Figure 2 also shows several values of  $v_N^* \in [v_L^*, v_U^*]$  within the indeterminacy interval. From this comparison, it is quite clear

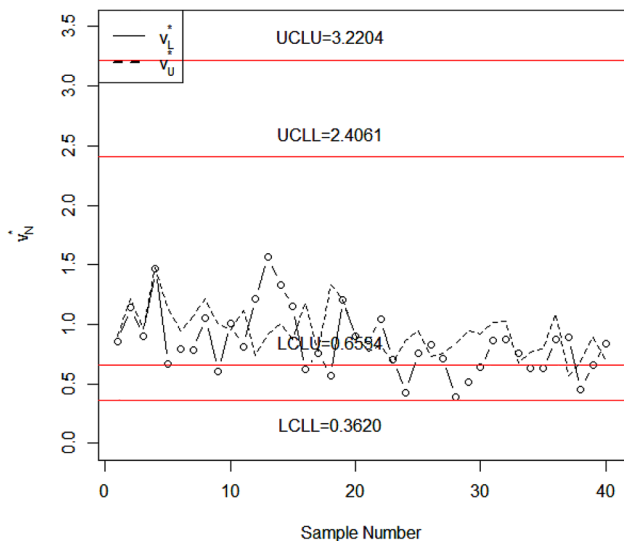

**Fig. 1** The proposed chart for the simulated data

that the proposed chart has the ability to detect a shift in the process.

**Example**

Suppose that a ball bearing company is interested to apply the proposed control chart for the monitoring of the ball bearing reliability. The company found that the reliability data follow the neutrosophic Weibull distribution with



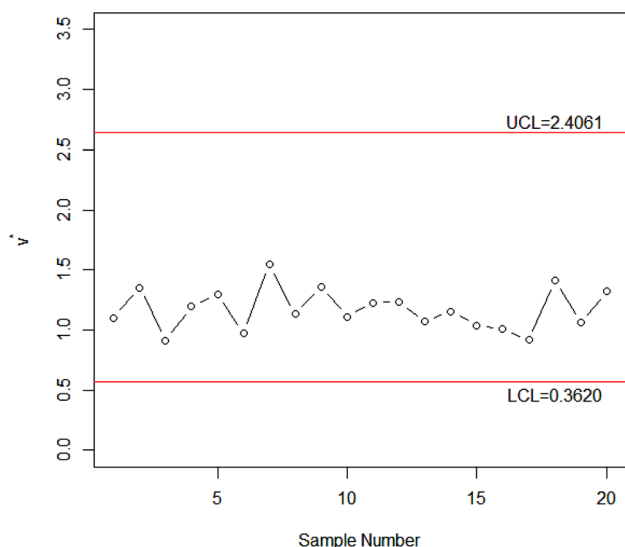


Fig. 2 [53] chart for the simulated data

$m_N \in [2.1, 2.3]$  and  $\lambda_N \in [0.55, 0.65]$ . For this experiment, let  $r_N \in [5, 5]$  and  $ARL_{1N} \in [370, 370]$ . For these parameters,  $g_N \in [4, 4]$  from Table 4. The experimenter will select a random sample of 20 balls and distribute them into 4-subgroup size. During the experiment, it is found that the reliability values of ball bearing are neutrosophic numbers rather than the exact numbers. Therefore, the monitoring of the process will be done using the proposed control chart. The neutrosophic data are shown in Table 6.


The values of statistic  $v_N^* \in [v_L^*, v_U^*]$  are plotted in Fig. 3 for the proposed control chart and in Fig. 4 for the existing control chart proposed by [53] under classical statistics. From Figs. 3, 4, we note that the proposed control chart provides the values in indeterminacy interval rather than the exact values. In addition, the proposed control chart shows that three plotting statistics are near the control limit which should be a problem in the process.

### Conclusion


In this article, a neutrosophic control chart for monitoring the reliability using sudden death testing under Weibull distribution has been presented. The NSIM has been used for the required measures to apply the proposed control chart. A simulation study was made to show the comparative efficiency of the proposed chart for the uncertainty environment. From the comparative study, it was noted that the proposed chart is efficient than the existing chart. In addition, on comparing the proposed chart, it can be observed that it is adequate, more flexible, and more efficient for use in an uncertain environment. In nutshell, the proposed chart is a valuable addition in the toolkit of the quality control personnel when there are unclear, uncertain, vague, or fuzzy observations in the sample. The proposed chart can be extended for the cost models or some other sampling schemes as future research.

Table 6 The  $m_N = [2.1, 2.3]$ ,  $\lambda_N = [0.55, 0.65]$  in-control process data generated from Weibull distribution

Sr.#	Sample	$V^*[N]$				
1	[0.0178, 0.0178]	[0.5117, 0.6457]	[0.7653, 0.7653]	[0.8343, 0.8734]	[1.1012, 1.1599]	
2	[0.4935, 0.4935]	[0.6793, 0.6793]	[0.9169, 0.9169]	[1.0457, 1.0457]	[1.3526, 1.3526]	
3	[0.1535, 0.1535]	[0.4894, 0.4894]	[0.6024, 0.6024]	[0.6175, 0.6175]	[0.9119, 0.9119]	
4	[0.4487, 0.4636]	[0.7130, 0.7130]	[0.7811, 0.7811]	[0.8199, 0.8199]	[1.1963, 1.1989]	
5	[0.5741, 0.5741]	[0.7975, 0.7975]	[0.8576, 0.8576]	[0.8578, 0.8578]	[1.2967, 1.2967]	
6	[0.3445, 0.3445]	[0.5629, 0.5629]	[0.5748, 0.5748]	[0.6710, 0.8392]	[0.9750, 1.0636]	
7	[0.5875, 0.5875]	[0.8473, 0.5624]	[1.0369, 1.0369]	[1.2262, 1.2262]	[1.54460, 1.483]	
8	[0.3616, 0.3616]	[0.4614, 0.7704]	[0.6973, 0.8543]	[0.9236, 0.9236]	[1.1316, 1.2794]	
9	[0.4093, 0.3518]	[0.7233, 0.7179]	[0.9794, 0.9794]	[1.0072, 1.0072]	[1.3607, 1.3531]	
10	[0.1626, 0.1626]	[0.4519, 0.4519]	[0.7953, 0.7953]	[0.8459, 0.8459]	[1.1107, 1.1107]	
11	[0.3981, 0.3981]	[0.5113, 0.5113]	[0.8941, 0.8941]	[0.9158, 0.9158]	[1.2266, 1.2266]	
12	[0.5814, 0.5814]	[0.6823, 0.6823]	[0.8180, 0.8180]	[0.8316, 0.9851]	[1.2338, 1.3027]	
13	[0.1800, 0.1800]	[0.3272, 0.3272]	[0.5806, 0.5806]	[0.9519, 0.9519]	[1.0673, 1.0673]	
14	[0.5739, 0.5739]	[0.6138, 0.6138]	[0.6609, 0.6609]	[0.8334, 0.8334]	[1.1533, 1.1533]	
15	[0.2634, 0.2634]	[0.4254, 0.4254]	[0.5915, 0.5915]	[0.8646, 0.8646]	[1.0378, 1.0378]	
16	[0.3777, 0.3777]	[0.4797, 0.4797]	[0.6254, 0.6254]	[0.7428, 0.9642]	[1.0106, 1.1369]	
17	[0.3264, 0.1707]	[0.4104, 0.4104]	[0.6024, 0.6024]	[0.6308, 0.6308]	[0.9151, 0.8953]	
18	[0.4717, 0.4717]	[0.8010, 0.8010]	[0.9415, 1.2846]	[1.0895, 1.0895]	[1.4138, 1.5654]	
19	[0.5016, 0.7292]	[0.5697, 0.5697]	[0.6646, 0.6646]	[0.7038, 0.7038]	[1.0623, 1.1382]	
20	[0.6478, 0.6478]	[0.6580, 0.6580]	[0.8051, 0.8051]	[1.0139, 1.0139]	[1.3211, 1.3211]	

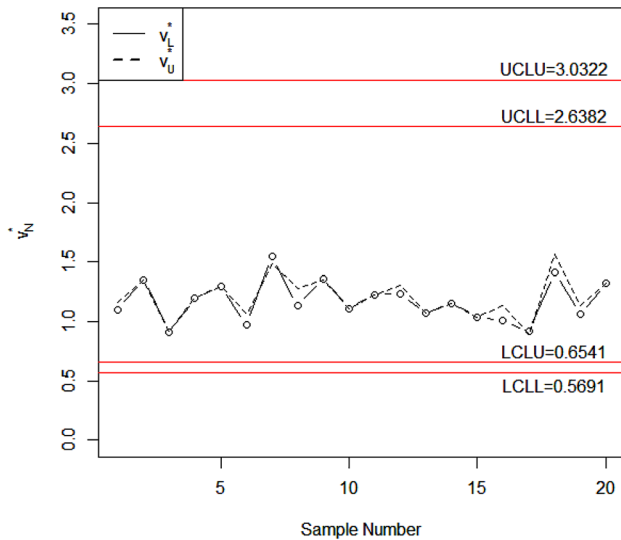

**Fig. 3** The proposed chart for ball bearing data

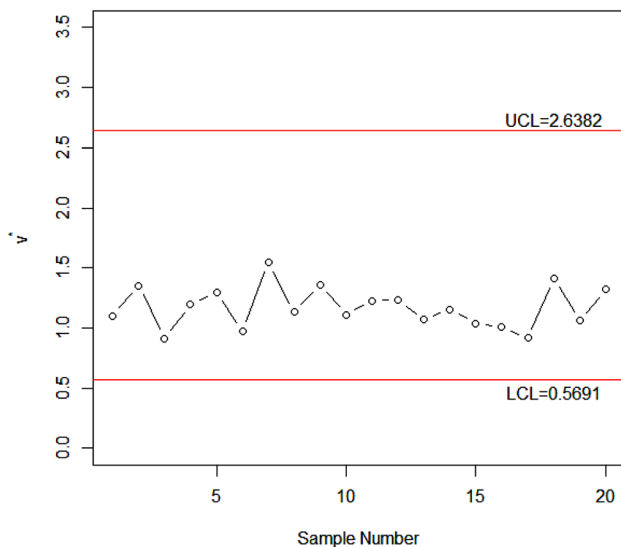

**Fig. 4** The existing chart for the ball bearing data

**Acknowledgements** The authors are deeply thankful to the editor and reviewers for their valuable suggestions to improve the quality of this manuscript. This work was supported by the Deanship of Scientific Research (DSR), Jouf University, Sakaka, under Grant no. (374/40). The authors, therefore, gratefully acknowledge the DSR technical and financial support.

**Data availability** The data is given in the paper.

## Declarations

**Conflict of interest** No conflict of interest regarding this paper.

**Open Access** This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

## References

1. Montgomery CD (2009) Introduction to statistical quality control. Wiley, New York
2. Aslam M, Arif O (2018) Testing of grouped product for the weibull distribution using neutrosophic statistics. *Symmetry* 10:403
3. Jun C-H, Balamurali S, Lee S-H (2006) Variables sampling plans for Weibull distributed lifetimes under sudden death testing. *IEEE Trans Reliab* 55:53–58
4. Pascual FG, Meeker WQ (1998) The modified sudden death test: planning life tests with a limited number of test positions. *J Test Eval* 26:434–443
5. Vlcek BL, Hendricks RC, Zaretsky EV (2004) Monte Carlo simulation of sudden death bearing testing. *Tribol Trans* 47:188–199
6. Suzuki K, Ohtsuka K, Ashitate M (1992) On a comparison between sudden death life testing and type II number fixed life testing—the precisions and the testing times using the maximum likelihood estimators. *J Jpn Soc Qual Control* 22:5–12
7. Fertig K, Mann NR (1980) Life-test sampling plans for two-parameter Weibull populations. *Technometrics* 22:165–177
8. Nichols MD, Padgett W (2006) A bootstrap control chart for Weibull percentiles. *Qual Reliab Eng Int* 22:141–151
9. Balasooriya U, Saw SL, Gadag V (2000) Progressively censored reliability sampling plans for the Weibull distribution. *Technometrics* 42:160–167
10. Aslam M, Jun C-H (2009) A group acceptance sampling plan for truncated life test having Weibull distribution. *J Appl Stat* 36:1021–1027
11. Aslam M, Azam M, Jun C-H (2015) Acceptance sampling plans for multi-stage process based on time-truncated test for Weibull distribution. *Int J Adv Manuf Technol* 2015:1–7
12. Woodall WH (1983) The distribution of the run length of one-sided CUSUM procedures for continuous random variables. *Technometrics* 25:295–301
13. Busaba J, Sukparungsee S, Areepong Y (2012) Numerical approximations of average run length for AR (1) on exponential CUSUM. *Comput Sci Telecommun* 19:23
14. Molnau WE, Runger GC, Montgomery DC, Skinner KR (2001) A program of ARL calculation for multivariate EWMA charts. *J Qual Technol* 33:515–521
15. Phanyaem S, Areepong Y, Sukparungsee S (2014) Numerical integration of average run length of CUSUM control chart for ARMA process. *Int J Appl Phys Math* 4:232–235
16. Chananet C, Sukparungsee S, Areepong Y (2014) The ARL of EWMA chart for monitoring ZINB model using markov chain approach. *Int J Appl Phys Math* 4:236–239
17. Lee M, Khoo MB (2006) Optimal statistical design of a multivariate EWMA chart based on ARL and MRL. *Commun Stat Simul Comput* 35:831–847



18. Li ZH, Zou CL, Gong Z, Wang ZJ (2014) The computation of average run length and average time to signal: an overview. *J Stat Comput Simul* 84:1779–1802
19. Knoth S (2007) Accurate ARL calculation for EWMA control charts monitoring normal mean and variance simultaneously. *Seq Anal* 26:251–263
20. Aslam M, Ali-Raza M, Azam M, Ahmad L, Jun C-H (2019) Design of a sign chart using a new EWMA statistic. *Commun Stat Theory Methods* 2019:1–12
21. Ahmad L, Aslam M, Arif O, Jun C-H (2016) Dispersion chart for some popular distributions under repetitive sampling. *J Adv Mech Design Syst Manuf* 2016:10
22. Liaquat A (2018) Developing variable repetitive group sampling control charts under different estimators. In: 17 Meldrum Street, Beau Bassin 71504, Mauritius: LAP LAMBERT Academic Publishing
23. Ahmad L, Aslam M, Khan N, Jun C-H (2017) Double moving average control chart for exponential distributed life using EWMA. AIP Publishing, pp 050003
24. Ahmad L, Aslam M, Jun C-H (2016) The design of a new repetitive sampling control chart based on process capability index. *Trans Inst Meas Control* 38:971–980
25. Zadeh LA (2005) Toward a generalized theory of uncertainty (GTU)—an outline. *Inf Sci* 172:1–40
26. Alakoc NP, Apaydin A (2018) A fuzzy control chart approach for attributes and variables. *Eng Technol Appl Sci Res* 8:3360–3365
27. Avakh Darestani S, Moradi Tadi A, Taheri S, Raeiszadeh M (2014) Development of fuzzy U control chart for monitoring defects. *Int J Qual Reliab Manag* 31:811–821
28. Cheng C-B (2005) Fuzzy process control: construction of control charts with fuzzy numbers. *Fuzzy Sets Syst* 154:287–303
29. Ercan Teksen H, Anagun AS (2018) Different methods to fuzzy  $X^2$ -R control charts used in production: Interval type-2 fuzzy set example. *J Enterprise Inf Manag* 31:848–866
30. Fadaei S, Pooya A (2018) Fuzzy U control chart based on fuzzy rules and evaluating its performance using fuzzy OC curve. *TQM J* 30:232–247
31. Faraz A, Kazemzadeh RB, Moghadam MB, Bazdar A (2010) Constructing a fuzzy Shewhart control chart for variables when uncertainty and randomness are combined. *Qual Quant* 44:905–914
32. Faraz A, Moghadam MB (2007) Fuzzy control chart a better alternative for Shewhart average chart. *Qual Quant* 41:375–385
33. Gülbay M, Kahraman C, Ruan D (2004)  $\alpha$ -Cut fuzzy control charts for linguistic data. *Int J Intell Syst* 19:1173–1195
34. Mashuri M, Ahsan M (2018) Performance fuzzy multinomial control Chart; 2018. IOP Publishing, pp 012120
35. Khan MZ, Khan MF, Aslam M, Mughal AR (2019) Design of fuzzy sampling plan using the birnbaum-saunders distribution. *Mathematics* 7:9
36. Utkin LV, Kozine IO (2002) Stress-strength reliability models under incomplete information. *Int J Gen Syst* 31:549–568
37. Smarandache F (2014) Introduction to neutrosophic statistics: infinite study
38. Smarandache F (1998) Neutrosophy, neutrosophic probability, set and logic, American Res. Press, Rehoboth, USA
39. Smarandache F (2019) Neutrosophic Set is a Generalization of Intuitionistic Fuzzy Set, Inconsistent Intuitionistic Fuzzy Set (Picture Fuzzy Set, Ternary Fuzzy Set), Pythagorean Fuzzy Set (Atanassov's Intuitionistic Fuzzy Set of second type), q-Rung Orthopair Fuzzy Set, Spherical Fuzzy Set, and n-HyperSpherical Fuzzy Set, while Neutrosophication is a Generalization of Regret Theory, Grey System Theory, and Three-Ways Decision (revisited): Infinite Study
40. Abdel-Basset M, Atef A, Smarandache F (2018) A hybrid Neutrosophic multiple criteria group decision making approach for project selection. *Cogn Syst Res* 2018:5
41. Abdel-Basset M, Gunasekaran M, Mohamed M, Smarandache F (2018) A novel method for solving the fully neutrosophic linear programming problems. *Neural Comput Appl* 2018:1–11
42. Abdel-Basset M, Mohamed M, Smarandache F (2018) An extension of neutrosophic AHP–SWOT analysis for strategic planning and decision-making. *Symmetry* 10:116
43. Chen J, Ye J, Du S, Yong R (2017) Expressions of rock joint roughness coefficient using neutrosophic interval statistical numbers. *Symmetry* 9:123
44. Chen J, Ye J, Du S (2017) Scale effect and anisotropy analyzed for neutrosophic numbers of rock joint roughness coefficient based on neutrosophic statistics. *Symmetry* 9:208
45. Aslam M, Khan N, Khan M (2018) Monitoring the variability in the process using neutrosophic statistical interval method. *Symmetry* 10:562
46. Aslam M, AL-Marshadi A, (2018) Design of sampling plan using regression estimator under indeterminacy. *Symmetry* 10:754
47. Aslam M (2018) A New Sampling Plan Using Neutrosophic Process Loss Consideration. *Symmetry* 10:132
48. Aslam M, Bantan RA, Khan N Design of a New Attribute Control Chart Under Neutrosophic Statistics. *International Journal of Fuzzy Systems: 1–8.*
49. Aslam M, Khan N (2019) A new variable control chart using neutrosophic interval method—an application to automobile industry. *Journal of Intelligent & Fuzzy Systems* 36:2615–2623
50. Aslam M (2019) Attribute Control Chart Using the Repetitive Sampling under Neutrosophic System. *IEEE Access.*
51. Aslam M (2019) A new failure-censored reliability test using neutrosophic statistical interval method. *Int J Fuzzy Syst* 21:1214–1220
52. Wilson EB, Hilferty MM (1931) The distribution of chi-square. proceedings of the National Academy of Sciences of the United States of America 17: 684.
53. Aslam M, Arif OH, Jun C-H (2017) A New Control Chart for Monitoring Reliability Using Sudden Death Testing Under Weibull Distribution. *IEEE Access* 5:23358–23365

**Publisher's Note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.