

Rotational superradiant scattering in a vortex flow

Theo Torres¹, Sam Patrick¹, Antonin Coutant¹, Maurício Richartz², Edmund W. Tedford³ and Silke Weinfurtner^{1,4,5}*

When an incident wave scatters off of an obstacle, it is partially reflected and partially transmitted. In theory, if the obstacle is rotating, waves can be amplified in the process, extracting energy from the scatterer. Here we describe in detail the first laboratory detection of this phenomenon, known as superradiance¹⁻⁴. We observed that waves propagating on the surface of water can be amplified after being scattered by a draining vortex. The maximum amplification measured was $14\% \pm 8\%$, obtained for 3.70 Hz waves, in a 6.25-cm-deep fluid, consistent with the superradiant scattering caused by rapid rotation. We expect our experimental findings to be relevant to black-hole physics, since shallow water waves scattering on a draining fluid constitute an analogue of a black hole⁵⁻¹⁰, as well as to hydrodynamics, due to the close relation to over-reflection instabilities¹¹⁻¹³.

In water, perturbations of the free surface manifest themselves by a small change $\xi(t, \mathbf{x})$ of the water height. On a flat bottom, and in the absence of flow, linear perturbations are well described by superpositions of plane waves of definite frequency f (Hz) and wavevector \mathbf{k} (rad \mathbf{m}^{-1}). When surface waves propagate on a changing flow, the surface elevation is generally described by the sum of two contributions $\xi = \xi_1 + \xi_s$, where ξ_1 is the incident wave produced by a source, for example, a wave generator, while ξ_s is the scattered wave, generated by the interaction between the incident wave and the background flow. In this work, we are interested on the properties of this scattering on a draining vortex flow which is assumed to be axisymmetric and stationary. At the free surface, the velocity field is given in cylindrical coordinates by $\mathbf{v} = v_r \mathbf{e}_r + v_\theta \mathbf{e}_\theta + v_z \mathbf{e}_z$.

Due to the symmetry, it is appropriate to describe ξ_I and ξ_S using polar coordinates (r,θ) . Any wave $\xi(t,r,\theta)$ can be decomposed into partial waves^{10,14},

$$\xi(t,r,\theta) = \operatorname{Re}\left[\sum_{m=7}^{\infty} \int_{0}^{\infty} \varphi_{f,m}(r) \frac{e^{-2ixft + im\theta}}{\sqrt{r}} df\right]$$
(1)

where $m \in \mathbb{Z}$ is the azimuthal wavenumber and $\varphi_{f,m}(r)$ denotes the radial part of the wave. Each component of this decomposition has a fixed angular momentum proportional to m, instead of a fixed wavevector \mathbf{k} . (To simplify notation, we drop the indices $f_{f,m}$ in the following.) Since the background is stationary and axisymmetric, waves with different f and m propagate independently. Far from the centre of the vortex, the flow is very slow, and the radial part $\varphi(r)$ becomes a sum of oscillatory solutions,

$$\varphi(r) = A_{\rm in} e^{-ikr} + A_{\rm out} e^{ikr}$$
 (2)

where $k = ||\mathbf{k}||^2$ is the wavevector norm. This describes the superposition of an inward wave of (complex) amplitude $A_{\rm in}$ propagating towards the vortex, and an outward wave propagating

This allows us to define the reflection coefficient at fixed f and m as the ratio between the outward (J_{out}) and inward (J_{in}) energy fluxes,

$$R = \sqrt{\frac{J_{\text{out}}}{J_{\text{in}}}} \tag{3}$$

In the linear approximation, the wave energy is a quadratic quantity in wave amplitude, and R is proportional to the amplitude ratio $|A_{\text{out}}/A_{\text{in}}|$.

If |R| < 1, the wave has lost energy during the scattering, and hence has undergone absorption. In this work we show experimentally that, under certain conditions, the reflection coefficient satisfies |R| > 1. We further argue that the amplified wave has extracted rotational energy from the vortex during the process.

We conducted our experiment in a rectangular water tank (length 3 m and width 1.5 m). Water is pumped continuously in from one end corner, and is drained through a hole (4 cm in diameter) in the middle. The water flows in a closed circuit. We first establish a stationary rotating draining flow by setting the flow rate of the pump to $37.5 \pm 0.5 \, \mathrm{lmin}^{-1}$ and waiting until the depth (away from the vortex) is steady at $6.25 \pm 0.05 \, \mathrm{cm}$. We then generate plane waves from one side of the tank, with an excitation frequency varying from $2.87 \, \mathrm{Hz}$ to $4.11 \, \mathrm{Hz}$. On the side of the tank opposite the wave generator, we have placed an absorption beach (we have verified that the amount of reflection from the beach is below 5% in all experiments). We record the free surface with a high-speed three-dimensional air–fluid interface sensor. The sensor is a joint invention 16 (patent no. DE 10 2015 001 365 A1) between The University of Nottingham and EnShape GmbH (Jena, Germany).

Using this data, we apply two filters. We first perform a Fourier transform in time, to single out the signal at the excitation frequency f_0 . This allows us to filter out the (stationary) background height, lying at f=0, as well as the high-frequency noise. Moreover, we observe that the second harmonic, at $2f_0$, is also excited by the wave generator. This gives us an upper bound on the amount of nonlinearity of the system. In all experiments, the relative

¹School of Mathematical Sciences, University of Nottingham, University Park, Nottingham NG7 2RD, UK. ²CMCC - Centro de Matemática, Computação e Cognição, Universidade Federal do ABC (UFABC), 09210-170 Santo André, São Paulo, Brazil. ³Department of Civil Engineering, University of British Columbia, 6250 Applied Science Lane, Vancouver V6T 1Z4, Canada. ⁴School of Physics and Astronomy, University of Nottingham, Nottingham NG7 2RD, UK. ⁵Centre for the Mathematics and Theoretical Physics of Quantum Non-Equilibrium Systems, University of Nottingham, Nottingham NG7 2RD, UK. *e-mail: silke.weinfurtner@nottingham.ac.uk

LETTERS

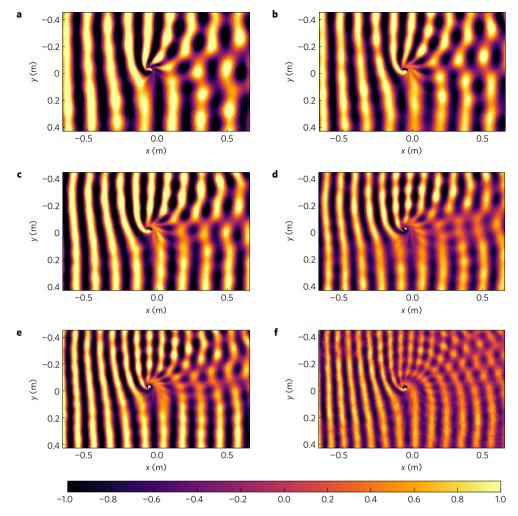


Figure 1 | Wave characteristics of the surface perturbation ξ , filtered at a single frequency, for six different frequencies. a-f, The frequencies are 2.87 Hz (a), 3.04 Hz (b), 3.27 Hz (c), 3.45 Hz (d), 3.70 Hz (e), and 4.11 Hz (f). The horizontal and vertical axis are in metres (m), while the colour scale is in millimetres (mm). The patterns show the interfering sum of the incident wave with the scattered wave. The waves are generated on the left and propagate to the right across the vortex centred at the origin.

amplitude of the second harmonic compared to the fundamental stays below 14%. The obtained pattern shows a stationary wave of frequency f_0 scattering on the vortex, which consists of the interfering superposition of the incident wave ξ_1 with the scattered wave ξ_8 . This pattern is shown on Fig. 1 for various frequencies, and looks very close to what was predicted on theoretical grounds for simple bathtub flow models^{10,17}. We also observe that incident waves have more wavefronts on the upper half of the vortex in comparison with the lower half—see the various wave characteristics in Fig. 1a–f. This angular phase shift is analogous to the Aharonov–Bohm effect, and has been observed in previous water wave experiments^{18,19}. Our detection method allows for a very clear visualization of this effect.

The second filter is the polar Fourier transform, which selects a specific azimuthal wavenumber m, and allows the radial profile $\varphi(r)$ to be determined. To extract the reflection coefficient, we use a windowed Fourier transform of the radial profile $\varphi(r)$. The windowing is done on the interval $[r_{\min}, r_{\max}]$. When r_{\min} is large enough, the radial profile φ contains two Fourier components (see equation (2)), one of negative k (inward wave), and one of positive k (outward wave). The ratio between their two amplitudes gives us the reflection coefficient (up to the energy correction, see Methods—Wave energy). To better resolve the two peaks, we have applied a Hamming window on the radial profile over the interval $[r_{\min}, r_{\max}]$. In all experiments, $r_{\min} \simeq 0.15 \, \text{m}$, while $r_{\max} \simeq 0.39 \, \text{m}$. We also point

out that the minimum radius such that the radial profile reduces to equation (2) increases with m. With the size of our window, and the wavelength range of the experiment, we can resolve with confidence m = -2, -1, 0, 1, 2.

On Fig. 2 we represent, for several azimuthal numbers m, the absolute value of the reflection coefficient R as a function of the frequency f. We observe two distinct behaviours, depending on the sign of m. Negative m values (waves counterrotating with the vortex) have a low reflection coefficient, which means that they are essentially absorbed in the vortex hole. On the other hand, positive m values have a reflection coefficient close to 1. In some cases this reflection is above 1, meaning that the corresponding mode has been amplified while scattering on the vortex. To confirm this amplification we have repeated the same experiment 15 times at a frequency $f = 3.8 \,\mathrm{Hz}$ and water height $h_0 = 6.25 \,\pm\, 0.05 \,\mathrm{cm}$, for which the amplification was the highest. We present the result in Fig. 3. In this figure we clearly observe that the modes m = 1 and m = 2 are amplified by factors $R_{m=1} \sim 1.09 \pm 0.03$, and $R_{m=2} \sim 1.14 \pm 0.08$ respectively. In Figs 2 and 3, we have also shown the reflection coefficients obtained for a plane wave propagating on standing water of the same depth. Unlike what happens in the presence of a vortex, the reflection coefficients are all below 1 (within error bars). For low frequencies it is close to 1, meaning that the wave is propagating without losses, while for higher frequencies it decreases due to a loss of energy during the propagation—that is, damping.

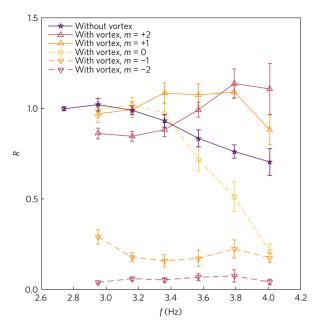


Figure 2 | Reflection coefficients for various frequencies and various values of m. For the vortex experiments the statistical average is taken over 6 repetitions, except for f = 3.70 Hz where we have 15 repetitions. The purple line (star points) shows the reflection coefficients of a plane wave in standing water of the same height. We observe a significant damping for the frequencies above 3 Hz (see Fig. 2). In future experiments, we hope to reduce this damping by working with purer water²⁶. Each point of a plane wave on standing water (that is, without vortex) is averaged over 5 repetitions instead of 6, and over m = -2...2 (the reflection coefficient of a plane wave on standing water is in theory independent of m, see also Fig. 3). The errors bars indicate the standard deviation over these experiments, the energy uncertainty and the standard deviation over several centre choices (see Methods). The main contribution comes from the variability of the value of the reflection coefficient for different repetitions of the experiment. We have also extracted the signal-to-noise ratio for each experiment, and its contribution to the error bars is negligible (see Methods—Data analysis).

The origin of this amplification can be explained by the presence of negative energy waves 20,21 . Negative energy waves are excitations that lower the energy of the whole system (that is, background flow and excitation) instead of increasing it. In our case, the sign of the energy of a wave is given by the angular frequency in the fluid frame $\omega_{\rm fluid}$. If the fluid rotates with an angular velocity $\Omega(r)$, in rad s $^{-1}$, we have $\omega_{\rm fluid}=2\pi f-m\Omega(r)$. At fixed frequency, when the fluid rotates fast enough, the energy becomes negative. If part of the wave is absorbed in the hole, carrying negative energy, the reflected part must come out with a higher positive energy to ensure conservation of the total energy 2 . Using particle imaging velocimetry (PIV), we have measured the velocity field of the vortex flow of our experiment. As we see on Fig. 4a, close to the centre, the angular velocity is fairly high, and the superradiant condition $2\pi f < m\Omega$ is therefore satisfied for our frequency range.

Our experiment demonstrates that a wave scattering on a rotating vortex flow can carry away more energy than the incident wave brings in. Our results show that the phenomenon of superradiance is very robust and requires few ingredients to occur, namely high angular velocities, allowing for negative energy waves, and a mechanism to absorb these negative energies. For about half of the frequency range, our results confirm superradiant amplification despite a significant damping of the waves. The present experiment does not reveal the mechanism behind the absorption of the negative energies. The likely possibilities are that they are dissipated away in the vortex throat, in analogy to superradiant cylinders^{4,22}, that they

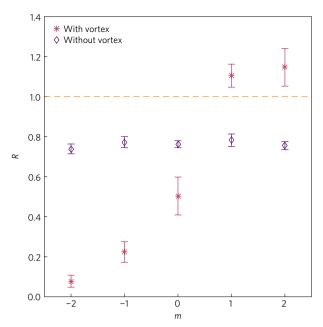


Figure 3 | Reflection coefficients for different values of *m*, for the frequency *f* = 3.70 Hz (stars). We have also shown the reflection coefficients for plane waves without a flow, at the same frequency and water height (diamonds). We see that the plane wave reflection coefficients are identical for all *m* values, and all below 1 (within error bars). The statistic has been realized over 15 experiments. Error bars include the same contributions as in Fig. 2.

are trapped in the hole²³ and unable to escape, similarly to what happens in black holes^{24,25}, or a combination of both. A possible way to distinguish between the two in future experiments would be to measure the amount of energy going down the throat.

Methods

Methods, including statements of data availability and any associated accession codes and references, are available in the online version of this paper.

Received 5 January 2017; accepted 25 April 2017; published online 12 June 2017

References

- Brito, R., Cardoso, V. & Pani, P. Superradiance. Lect. Notes Phys. 906, 1–237 (2015).
- Richartz, M., Weinfurtner, S., Penner, A. J. & Unruh, W. G. Generalized superradiant scattering. *Phys. Rev. D* 80, 124016 (2009).
- Zel'Dovich, Y. B. Generation of waves by a rotating body. JETP Lett. 14, 180–181 (1971).
- Zel'Dovich, Y. B. Amplification of cylindrical electromagnetic waves reflected from a rotating body. Sov. Phys. JETP 35, 1085–1087 (1972).
- Unruh, W. Experimental black hole evaporation. Phys. Rev. Lett. 46, 1351–1353 (1981).
- Visser, M. Acoustic black holes: horizons, ergospheres and Hawking radiation. Class. Quantum Gravity 15, 1767–1791 (1998).
- Schützhold, R. & Unruh, W. G. Gravity wave analogues of black holes. Phys. Rev. D 66, 044019 (2002).
- Weinfurtner, S., Tedford, E. W., Penrice, M. C. J., Unruh, W. G. & Lawrence, G. A. Measurement of stimulated hawking emission in an analogue system. *Phys. Rev. Lett.* 106, 021302 (2011).
- Steinhauer, J. Observation of thermal Hawking radiation and its entanglement in an analogue black hole. Nat. Phys. 12, 959–965 (2016).
- Dolan, S. R. & Oliveira, E. S. Scattering by a draining bathtub vortex. *Phys. Rev. D* 87, 124038 (2013).
- 11. Acheson, D. J. On over-reflexion. J. Fluid Mech. 77, 433-472 (1976).
- Kelley, D. H., Triana, S. A., Zimmerman, D. S., Tilgner, A. & Lathrop, D. P. Inertial waves driven by differential rotation in a planetary geometry. *Geophys. Astrophys. Fluid Dynam.* 101, 469–487 (2007).

LETTERS

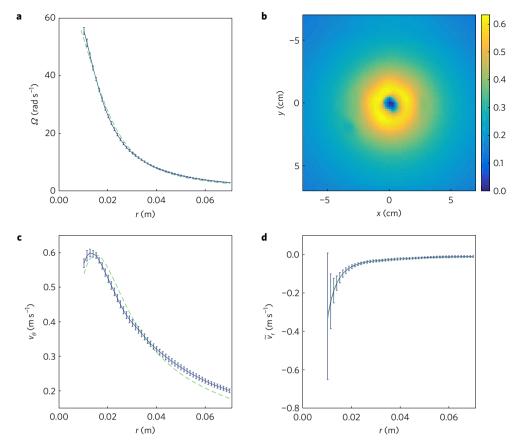


Figure 4 | **PIV** measurements of the velocity field averaged of 10 experiments. **a**, Angular frequency profile as a function of r. **b**, Norm of the velocity field of the background flow (in m s⁻¹). **c**, v_{θ} profile as function of r. **d**, \tilde{v}_{r} profile as function of r (see Methods—PIV measurements). The profiles are fitted with a model of the Lamb vortex type in equation (9), dashed-green line. The error bars correspond to standard deviations across the 10 measurements.

- 13. Fridman, A. *et al.* Over-reflection of waves and over-reflection instability of flows revealed in experiments with rotating shallow water. *Phys. Lett. A* **372**, 4822–4826 (2008).
- 14. Newton, R. G. Scattering Theory of Waves and Particles (Courier Dover, 1982).
- Richartz, M., Prain, A., Liberati, S. & Weinfurtner, S. Rotating black holes in a draining bathtub: superradiant scattering of gravity waves. *Phys. Rev. D* 91, 124018 (2015).
- Schaffer, M., Große, M. & Weinfurtner, S. Verfahren zur 3d-vermessung von flüssigkeiten und gelen. (2016); http://google.com/patents/ DE102015001365A1?cl=zh DE Patent App. DE201,510,001,365.
- Dolan, S. R., Oliveira, E. S. & Crispino, L. C. B. Aharonov–Bohm effect in a draining bathtub vortex. *Phys. Lett. B* 701, 485–489 (2011).
- Berry, M., Chambers, R., Large, M., Upstill, C. & Walmsley, J. Wavefront dislocations in the Aharonov–Bohm effect and its water wave analogue. *Eur. J. Phys.* 1, 154–162 (1980).
- 19. Vivanco, F., Melo, F., Coste, C. & Lund, F. Surface wave scattering by a vertical vortex and the symmetry of the Aharonov–Bohm wave function. *Phys. Rev. Lett.* **83**, 1966–1969 (1999).
- Stepanyants, Y. A. & Fabrikant, A. Propagation of Waves in Shear Flows (Phys. Math. Literature Publishing Company, Russian Academy of Sciences, 1996).
- Coutant, A. & Parentani, R. Undulations from amplified low frequency surface waves. *Phys. Fluids* 26, 044106 (2014).
- Cardoso, V., Coutant, A., Richartz, M. & Weinfurtner, S. Detecting rotational superradiance in fluid laboratories. *Phys. Rev. Lett.* 117, 271101 (2016).
- 23. Basak, S. & Majumdar, P. 'Superresonance' from a rotating acoustic black hole. *Class. Quantum Gravity* **20,** 3907–3914 (2003).
- Misner, C. Stability of Kerr black holes against scalar perturbations. Bull. Am. Phys. Soc. 17, 472 (1972).
- Starobinsky, A. A. Amplification of waves during reflection from a rotating black hole. Sov. Phys. JETP 37, 28–32 (1973).
- Przadka, A., Cabane, B., Pagneux, V., Maurel, A. & Petitjeans, P. Fourier transform profilometry for water waves: how to achieve clean water attenuation with diffusive reflection at the water surface? *Exp. Fluids* 52, 519–527 (2012).

Acknowledgements

We are indebted to the technical and administrative staff in the School of Physics & Astronomy where our experimental setup is hosted. In particular, we want to thank T. Wright and T. Napier for their support, hard work and sharing their technical knowledge and expertise with us to set up the experiment in Nottingham. Furthermore we would like to thank B. Unruh, S. Liberati, J. Niemela, L. Lehner, V. Cardoso, M. Berry, V. Pagneux, D. Faccio, F. Orucevic, J. Schmiedmayer and T. Fernholz for discussions regarding the experiment, and we wish to thank M. Berry, V. Cardoso, D. Faccio, L. Lehner, S. Liberati and B. Unruh for comments on the paper. Although all experiments have been conducted at The University of Nottingham, the initial stages of the experiment took place at ICTP / SISSA in Trieste (Italy) and would not have been possible without the support by J. Niemela, S. Liberati and G. Martinelli. S.W. would like to thank M. Penrice, A. Prain, M. Danailov, I. Cudin, H. Tanner, Z. Fifer, A. Finke and D. Russon for their contributions at different stages of the experiment. S.W. would also like to thank T. Sotiriou for the many discussions on all aspects of the project. A.C. acknowledges funding received from the European Union's Horizon 2020 research and innovation programme under the Marie Sklodowska Curie grant agreement no. 655524. M.R. acknowledges financial support from the São Paulo Research Foundation (FAPESP), Grants No. 2005/04219-0, No. 2010/20123-1, No. 2013/09357-9, No. 2013/15748-0 and No. 2015/14077-0. M.R. and T. Ted are also grateful to S.W. and the University of Nottingham for hospitality while this work was being completed. S.W. acknowledges financial support provided under the Royal Society University Research Fellow (UF120112), the Nottingham Advanced Research Fellow (A2RHS2), the Royal Society Project (RG130377) grants and the EPSRC Project Grant (EP/P00637X/1). The initial stages of the experiment were funded by S.W.'s Research Awards for Young Scientists (in 2011 and 2012) and by the Marie Curie Career Integration Grant (MULTI-QG-2011).

Author contributions

All authors contributed substantially to the work.

Additional information

Supplementary information is available in the online version of the paper. Reprints and permissions information is available online at www.nature.com/reprints. Publisher's note: Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations. Correspondence and requests for materials should be addressed to S.W.

Competing financial interests

The authors declare no competing financial interests.

NATURE PHYSICS DOI: 10.1038/NPHYS4151 LETTERS

Methods

Wave energy. To verify that the observed amplification increases the energy of the wave, we compare the energy current of the inward wave with respect to the outward wave. Since energy is transported by the group velocity $V_{\rm g}$, the energy current is given by $J=g\,\omega_{\rm flud}^{-1}\,v_{\rm g}|A|^2/f$ (up to the factor 1/f, this is the wave action, an adiabatic invariant of waves $^{27-29}$). If the background flow velocity is zero, then the ratio $J_{\rm out}/J_{\rm in}$ is simply $|A_{\rm out}/A_{\rm in}|^2$. However, in the presence of the vortex, we observe from our radial profiles $\varphi(r)$ (defined in equation (1)) that the wavenumbers of the inward and outward waves are not exactly opposite. The origin of this (small) difference is that the flow velocity is not completely negligible in the observation window. It generates a small Doppler shift that differs depending on whether the wave propagates against or with the flow. In this case, the ratio of the energy currents picks up a small correction with respect to the ratio of the amplitudes, namely,

$$\frac{J_{\text{out}}}{J_{\text{in}}} = \left| \frac{\omega_{\text{fluid}}^{\text{in}} \nu_{\text{g}}^{\text{out}}}{\omega_{\text{fluid}}^{\text{out}} \nu_{\text{g}}^{\text{in}}} \right| \left| \frac{A_{\text{out}}}{A_{\text{in}}} \right|^{2}$$

$$(4)$$

To estimate this factor, we assume that the flow varies slowly in the observation window, such that ω_{fluid} obeys the usual dispersion relation of water waves, $\omega_{\text{fluid}}^2 = gk \tanh(h_0k)$. (This amounts to a Wentzel–Kramers–Brillouin (WKB) approximation, and capillarity is neglected.) Under this assumption, the group velocity is the sum of the group velocity in the fluid frame, given by the dispersion relation, $v_{\text{g}}^{\text{fluid}} = \partial_k \sqrt{gk \tanh(h_0k)}$, and the radial velocity of the flow v_r . Hence the group velocity needed for the energy ratio equation (4) splits into two: $v_{\text{g}} = v_{\text{g}}^{\text{duid}} + v_r$. The first term is obtained only with the values of k_{in} and k_{out} , extracted from the radial Fourier profiles. The second term requires the value of v_r , which we do not have to a sufficient accuracy. However, using the PIV data, we see that the contribution of this last term amounts to less than 1% in all experiments (this uncertainty is added to the error bars on Figs 2 and 3).

Data analysis. We record the free surface of the water in a region of $1.33\,\mathrm{m}\times0.98\,\mathrm{m}$ over the vortex during $13.2\,\mathrm{s}$. From the sensor we obtain 248 reconstructions of the free surface. These reconstructions are triplets X_{ij} , Y_{ij} and Z_{ij} giving the coordinates of 640×480 points on the free surface. Because of the shape of the vortex, and noise, parts of the free surface cannot be seen by our sensor, resulting in black spots on the image. Isolated black spots are corrected by interpolating the value of the height using their neighbours. This procedure is not possible in the core of the vortex, and we set these values to zero.

To filter the signal in frequency, we first crop the signal in time so as to keep an integer number of cycles to reduce spectral leakage. We then select a single frequency corresponding to the excitation frequency f_0 . After this filter, we are left with a two-dimensional array of complex values, encoding the fluctuations of the water height $\xi(X_{ij}, Y_{ij})$ at the frequency f_0 . $\xi(X_{ij}, Y_{ij})$ is defined on the grids X_{ij} and Y_{ij} , whose points are not perfectly equidistant (this is due to the fact that the discretization is done by the sensor software in a coordinate system that is not perfectly parallel to the free surface).

To select specific azimuthal numbers, we convert the signal from Cartesian to polar coordinates. For this we need to find the centre of symmetry of the background flow. We define our centre to be the centre of the shadow of the vortex, averaged over time (the fluctuations in time are smaller than a pixel). To verify that this choice does not affect the end result, we performed a statistical analysis on different centre choices around this value, and added the standard deviation to the error bars. Once the centre is chosen, we perform a discrete Fourier transform on the irregular grid (X_{ij}, Y_{ij}) . We create an irregular polar grid (r_{ij}, θ_{ij}) and we compute

$$\varphi_m(r_{ij}) = \frac{\sqrt{r_{ij}}}{2\pi} \sum_{j} \xi(r_{ij}, \theta_{ij}) e^{-im\theta_{ij}} \Delta\theta_{ij}$$
 (5)

where $\Delta \theta_{ij} = (\Delta X_{ij} \Delta Y_{ij})/(r_{ij} \Delta r_{ij})$ is the line element along a circle of radius r_{ij} .

To extract the inward and outward amplitudes $A_{\rm in}$ and $A_{\rm out}$, we compute the radial Fourier transform $\tilde{\varphi}_{\rm m}(k)=\int \varphi_{\rm m}(r){\rm e}^{-ikr}dr$ over the window $[r_{\rm min},r_{\rm max}]$. Due to the size of the window compared to the wavelength of the waves, we can capture only a few oscillations in the radial direction, typically between 1 and 3. This results in broad peaks around the values $k_{\rm in}$ and $k_{\rm out}$ of the inward and outward components. We assume that these peaks contain only one wavelength (no superposition of nearby wavelengths), which is corroborated by the fact that we have filtered in time, and the dispersion relation imposes a single wavelength at a given frequency. To reduce spectral leakage, we use a Hamming window function on $[r_{\rm min},r_{\rm max}]$, defined as

$$W(n) = 0.54 - 0.46\cos\left(2\pi \frac{n}{N}\right) \tag{6}$$

where n is the pixel index running from 1 to N. This window is optimized to reduce the secondary lobe, and allows us to better distinguish peaks with different amplitudes³⁰. In Supplementary Fig. 1, we show the radial Fourier profiles for

various m for a typical experiment (left column), and the raw radial profiles and how they are approximated by equation (2) (right column).

We also extracted the signal-to-noise ratio by comparing the standard deviation of the noise to the value of our signal. It is sufficiently high to exclude the possibility that the amplification we observed is due to a noise fluctuation, and its contribution is negligible compared to other sources of error.

PIV measurements. Close to the vortex core, the draining bathtub vortex is cylindrically symmetric to a good approximation. An appropriate choice of coordinates is, therefore, cylindrical coordinates (r, θ, z) . The velocity field will be independent of the angle θ and can be expressed as

$$\mathbf{v}(r,z) = v_{\mathrm{r}}(r,z)\mathbf{e}_{\mathrm{r}} + v_{\theta}(r,z)\mathbf{e}_{\theta} + v_{z}(r,z)\mathbf{e}_{z} \tag{7}$$

We are specifically interested in the velocity field at the free surface z=h(r). When the free surface is flat, h is constant and the vertical velocity v_z vanishes. When the surface is not flat, the v_z component can be deduced from v_r using the free surface profile h(r) and the equation $v_z(r,h(r))=(\partial_r h)v_r|_{z=h}$. To obtain an estimate of v_z , we use a simple model for the free surface shape³¹,

$$h(r) = h_0 \left(1 - \frac{r_a^2}{r^2} \right) \tag{8}$$

where h_0 is the water height far from the vortex and r_a is the radial position at which the free surface passes through the sink hole. This approximation captures the essential features of our experimental data. The components v_r and v_θ are determined through the technique of particle imaging velocimetry (PIV), implemented through the Matlab extension $PIVlab^{32,33}$. The technique can be summarized as follows.

The flow is seeded with flat paper particles of mean diameter d=2 mm. The particles are buoyant, which allows us to evaluate the velocity field exclusively at the free surface. The amount by which a particle deviates from the streamlines of the flow is given by the velocity lag $U_{\rm s}=d^2(\rho-\rho_0)a/18\mu$ (ref. 32), where ρ is the density of a particle, ρ_0 is the density of water, μ is the dynamic viscosity of water and a is the acceleration of a particle. For fluid accelerations in our system this is at most of the order 10^{-4} m s⁻¹, an order of magnitude below the smallest velocity in the flow. Thus we can safely neglect the effects of the velocity lag when considering the motions of the particles in the flow.

The surface is illuminated using two light panels positioned at opposite sides of the tank. The flow is imaged from above using a Phantom Miro Lab 340 high-speed camera at a frame rate of 800 fps for an exposure time of 1,200 μs . The raw images are analysed using PIVlab by taking a small window in one image and looking for a window within the next image which maximizes the correlation between the two. By knowing the distance between these two windows and the time step between two images, it is possible to give each point on the image a velocity vector. This process is repeated for all subsequent images, and the results are then averaged in time to give a mean velocity field.

The resulting velocity field is decomposed onto an (r,θ) -basis centred about the vortex origin to give the components v_r and v_θ . The centre is chosen so as to maximize the symmetry. In Fig. 4b we show the norm of the velocity field on the free surface. We see that our vortex flow is symmetric to a good approximation. To quantify the asymmetry of the flow, we estimate the coupling of waves with $m \neq m'$ through asymmetry. The change of the reflection coefficient due to this coupling is of the order of $|\tilde{v}^I|/v_{\rm g}|$, where \tilde{v}^I is the angular Fourier component of azimuthal number l=m-m'. This ratio is smaller than 3% in all experiments. To obtain the radial profiles of v_r and v_θ , we integrate them over the angle θ . In Figs 4c,d we show v_θ and the inward velocity tangent to the free surface, $\tilde{v}_r=-\sqrt{v_r^2+v_z^2}$, as functions of r.

We compare the data for ν_{θ} with the Lamb vortex³¹

$$v_{\theta}(r,h) = \frac{\Omega_0 r_0^2}{r} \left[1 - \exp\left(-\frac{r^2}{r_0^2}\right) \right]$$
 (9)

where Ω_0 is the maximum angular velocity in the rotational core of characteristic radius r_0 . (For v_θ we have $\Omega_0=69.4\,\mathrm{rad\,s^{-1}}$ and $r_0=1.34\,\mathrm{cm}$, and for v_r we have $\Omega_0=-4.52\,\mathrm{rad\,s^{-1}}$ and $r_0=1.39\,\mathrm{cm}$.) Outside the vortex core, this model reduces to the characteristic 1/r dependence of an incompressible, irrotational flow depending only on r. By observing that v_θ and v_r exhibit similar qualitative behaviour, v_r is also fitted with a model of the form of equation (9). Figure 4c,d show that equation (9) captures the essential features of the measured velocity profiles. The angular velocity of the flow is given by $\Omega(r)=v_\theta/r$ which is shown in Fig. 4a. From this plot it is clear that Ω reaches large enough values to be consistent with the detection of superradiance.

Data availability. The data that support the plots within this paper and other findings of this study are available from the corresponding author upon reasonable request.

LETTERS NATURE PHYSICS DOI: 10.1038/NPHYS4151

References

- 27. Bühler, O. Waves and Mean Flows (Cambridge Univ. Press, 2014).
- Richartz, M., Prain, A., Weinfurtner, S. & Liberati, S. Superradiant scattering of dispersive fields. *Class. Quantum Gravity* 30, 085009 (2013).
- Coutant, A. & Weinfurtner, S. The imprint of the analogue Hawking effect in subcritical flows. *Phys. Rev. D* 94, 064026 (2016).
- 30. Prabhu, K. Window Functions and their Applications in Signal Processing (CRC Press, 2013).
- 31. Lautrup, B. Physics of Continuous Matter: Exotic and Everyday Phenomena in the Macroscopic World (CRC Press, 2011).
- 32. Thielicke, W. The Flapping Flight of Birds PhD. thesis, Univ. Groningen (2014).
- 33. Thielicke, W. & Stamhuis, E. PIVlab—towards user-friendly, affordable and accurate digital particle image velocimetry in MATLAB. *J. Open Res. Softw.* 2, e30 (2014).