

**NANO EXPRESS**

**Open Access**

# A study of TiO<sub>2</sub>/carbon black composition as counter electrode materials for dye-sensitized solar cells

Jeongmin Lim<sup>1</sup>, Sang Yeoul Ryu<sup>2</sup>, Jeonghun Kim<sup>1</sup> and Yongseok Jun<sup>1\*</sup>

## Abstract

This study describes a systematic approach of TiO<sub>2</sub>/carbon black nanoparticles with respect to the loading amount in order to optimize the catalytic ability of triiodide reduction for dye-sensitized solar cells. In particular, the cell using an optimized TiO<sub>2</sub> and carbon black electrode presents an energy conversion efficiency of 7.4% with a 5:1 ratio of a 40-nm TiO<sub>2</sub> to carbon black. Based on the electrochemical analysis, the charge-transfer resistance of the carbon counter electrode changed based on the carbon black powder content. Electrochemical impedance spectroscopy and cyclic voltammetry study show lower resistance compared to the Pt counter electrode. The obtained nanostructures and photo electrochemical study were characterized.

**Keywords:** Dye-sensitized solar cells, Carbon black, Counter electrode, Nano composite

## Background

Dye-sensitized solar cells (DSSCs) have attracted considerable attention as a viable alternative to conventional silicon-based photovoltaic cells [1] because of their low-production cost, high conversion efficiency, environmental friendliness, and easy fabrication procedure [2-5]. A typical DSSC is comprised of a nanocrystalline semiconductor (TiO<sub>2</sub>), an electrolyte with redox couple (I<sub>3</sub><sup>-</sup>/I<sup>-</sup>), and a counter electrode (CE) to collect the electrons and catalyze the redox couple regeneration [6]. Extensive researches have been conducted in order for each component to achieve highly efficient DSSCs with a modified TiO<sub>2</sub> [7], alternative materials [8,9], and various structures [10-12]. Usually, Pt-coated fluorine-doped tin oxide (FTO) is used as a counter electrode owing to its superior catalytic activity [13]. However, there are researches reporting that Pt corrodes in an electrolyte containing iodide to generate PtI<sub>4</sub> [14,15]. Besides, large solar module systems will benefit from materials that are abundantly available with high chemical stability. Therefore, it is necessary to develop alternative materials

which must be inert and show good catalytic effect in the electrolyte.

A great deal of effort has been taken to replace the Pt metal with other materials such as cobalt sulfide (CoS) [16], titanium nitrides (TiN) [17-19], and carbon derivatives [20-23]. Among these candidates, carbon materials obtain increasing attention due to their abundance, low cost, and high catalytic activities with chemical stability against iodine redox couples [24-27].

Here, we focus on carbon black which is produced by combustion of heavy petroleum products with high surface areas. Compared to any other forms of carbon derivatives, carbon black does not require a delicate process to apply to counter electrodes. Note that carbon nanotubes and nanorods require multiple operations for the synthesis and application on counter electrode substrates. In this work, we demonstrate the properties of carbon black material with anatase TiO<sub>2</sub> in an attempt to replace the Pt counter electrode in DSSC applications. Forty-nanometer-sized TiO<sub>2</sub> nanoparticles were tested with various weight ratios of carbon black, and the effect was investigated by electrochemical impedance spectroscopy and cyclic voltammetry analysis in detail.

\* Correspondence: yjun@unist.ac.kr

<sup>1</sup>Interdisciplinary School of Green Energy, Ulsan National Institute of Science and Technology (UNIST), Ulsan 689-798, Republic of Korea

Full list of author information is available at the end of the article

## Methods

### Carbon black

The carbon black chunk was purchased from Sigma-Aldrich (14029-U, St. Louis, MO, USA) and ground to make powder. Pulverized carbon black was sifted out with 80-unit mesh then calcined for 2 h at 500°C in a muffle furnace. The annealed carbon mass was ground again and passed through with 200- to 350-unit mesh for further heat treatment at 300°C for 2 h in order to remove the impurities. The final carbon black powder size was 80 nm.

### Anatase TiO<sub>2</sub> nanocrystal synthesis

Titanium dioxide nanoparticles in anatase crystal form were synthesized by a modified Burnside method [28]. A 162-mL titanium (IV) isopropoxide (0.5 M, Sigma-Aldrich) was rapidly injected into 290 mL of distilled water (15.5 mol, J. T Baker, Avantor Performance Materials, Center Valley, PA, USA) under stirring, and the solution was vigorously stirred for a further 10 h. Addition of titanium (IV) isopropoxide in such an aqueous solution results in a white precipitate in the TiO<sub>x</sub> form. The resultant colloid was filtered and washed thrice with 50 mL of deionized (DI) water. Then the filtrate was loaded into an autoclave with 30 mL of a 0.6 M tetramethylammonium hydroxide solution to form a white slurry. The pH of the colloidal solution after addition of the base was measured to be between 7 to approximately 8. The solution was heated to 120°C for 6 h in order to obtain a peptization, and then the peptized suspension was treated hydrothermally in the autoclave at a temperature of 200°C for 4.5 h. The colloids were centrifuged at 13,000 rpm for 40 min and the precipitate was dried for 1 day in a vacuum oven, then dissolved into the DI water (wt.% of DI water/TiO<sub>2</sub> = 20:1). Then, a clear white color precipitate was observed.

### TiO<sub>2</sub>/carbon black slurry preparation

The TiO<sub>2</sub> and carbon black (T/CB) slurry was prepared as follows: various amounts of carbon black powder (50, 100, 200, and 500 mg) were mixed with 40-nm sizes of TiO<sub>2</sub> nanoparticles in various weight ratios (T/CB; 10:1, 5:1, 2.5:1, and 1:1). The mixture was dispersed by ultrasonication (750 W, Sonics & Materials, Inc, Newtown, CT, USA) for 10 min. After the ultrasonic treatment, 100 μl of Triton X-100 (Sigma-Aldrich) was added to the mixture and further ultrasonic treatment was carried for 10 min.

### Electrodes and cell fabrication

Samples of fluorine-doped tin oxide substrate (Pilkington TEC Glass-TEC 8, Nippon Sheet Glass Co., Ltd, Tokyo, Japan) were washed in a detergent solution, DI water, an ethanol-acetone mixture solution ( $v/v = 1/1$ ), and


2-propanol in an ultrasonic bath for 5 min, in turn, and then treated by a UV-O<sub>3</sub> system for 15 min to introduce a hydrophilic surface. Nanocrystalline TiO<sub>2</sub> paste (20 nm, ENB-Korea, Daejeon, Korea) was coated onto the FTO glasses using a doctor blade. The TiO<sub>2</sub>-coated FTO glasses were annealed at 500°C for 1.5 h to create a TiO<sub>2</sub> film; then, the substrate was treated with 40 mM of an aqueous solution of TiCl<sub>4</sub> at 80°C for 30 min and rinsed with DI water and an ethanol-acetonitrile mixture solution ( $v/v = 1/1$ ). The substrate was heat-treated again at 500°C for 30 min and immersed in 0.3 mM (Bu<sub>4</sub>N)<sub>2</sub>[Ru(dcbpyH)<sub>2</sub>(NCS)<sub>2</sub>] (N719) in a mixed solvent of acetonitrile and *tert*-butanol ( $v/v = 1/1$ ) with 0.075 mM DINHOP for 24 h. To prepare counter electrodes, a 10-M H<sub>2</sub>PtCl<sub>6</sub> solution in ethanol and T/CB slurry of various weight ratios were coated onto a cleaned FTO glass separately, followed by annealing at 500°C for 1 h in a tube furnace. The working electrode and the counter electrode were sandwiched together using a 50-μm thick Surlyn (DuPont) at 100°C for 10 s. An electrolyte containing a mixture of 0.6 M 1-hexyl-2,3-dimethyl-imidazolium iodide, 0.1 M guanidine thiocyanate, 0.03 M iodine, and 0.5 M 4-*tert*-butylpyridine in acetonitrile was injected, and final sealing completed the fabrication of the cell.

## Results and discussion

Figure 1 shows surface morphologies of the pure carbon black and the synthesized TiO<sub>2</sub> nanoparticles. The sizes of carbon black and TiO<sub>2</sub> particles are 75 and 40 nm, respectively. The carbon black has a lot of active sites for catalysis at edges with high porosity at approximately 75-nm size, and TiO<sub>2</sub> can easily be attached onto the FTO substrate at 40-nm size. We applied the mixture of both nanoparticles as a counter electrode; pores for electron transfer with high surface area and good adhesion of catalytic materials can easily be made.

Figure 2 shows a thermogravimetric analysis (TGA) of carbon black under air and argon atmosphere. When it reaches 350°C, TGA data show a very similar decrease for both conditions, which indicates that any organic residue on the surface evaporates. However, the carbon black in air showed drastic weight loss starting at approximately 350°C, possibly due to combustion. No noticeable decrease in weight is observed in the argon atmosphere sample until approximately 650°C. To avoid degradation, an argon atmosphere was used and the temperature of calcination was set at 500°C to remove all residues in the carbon black and improve the contact of TiO<sub>2</sub>.

The ratios of T/CB slurry were varied from 10:1, 5:1, and 2.5:1 and 1:1 weight ratio for the counter electrode. *J-V* curves for each ratio of T/CB slurry are shown in Figure 3, and the performance of these cells is listed in Table 1. The reference Pt cell shows 7.7% efficiency ( $\eta$ )

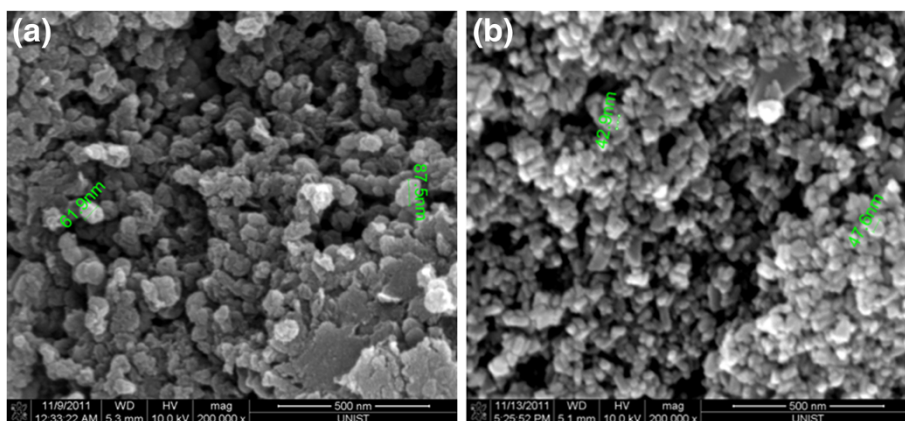


**Figure 1** FE-SEM image of the (a) carbon black powder and (b) hydrothermally synthesized TiO<sub>2</sub> nanoparticles.


with a 69.3% fill factor (*FF*), and the 5:1 ratio sample shows similar efficiency (7.4%) with a comparable *FF* (67.4%) and short-circuit current (*J<sub>sc</sub>*) (15.5 mA/cm<sup>2</sup>). Other samples show similar open-circuit potential (*V<sub>oc</sub>*) and *FF*, but the *J<sub>sc</sub>* are much lower than the Pt or 5:1 ratio cases. When the amount of carbon black is low (10:1 ratio), the adhesion of T/CB slurry to the FTO is better. However, reduction of I<sub>3</sub><sup>-</sup> is not active due to the low surface area available for triiodide reduction and it shows slightly lower *J<sub>sc</sub>* than the 5:1 ratio sample. A large amount of carbon black (2.5:1, 1:1 ratios) has enough surface area of reduction, but the poor adhesion of FTO and carbon black makes it difficult to get high efficiency [15,27,29].

Electrochemical impedance spectroscopies (EIS) of a dummy cell were analyzed to determine the interfacial electrochemical properties with ratios of T/CB. Figure 4 shows the Nyquist plots of symmetric cells with T/CB slurry ratios of 10:1, 5:1, 2.5:1, and 1:1 and a conventional Pt-coated counter electrode. The first arc of the

Pt-based counter electrodes appears at 100,000 to approximately 100 Hz with only one spectrum of Pt electrode/electrolyte interface. Under 100 Hz, Warburg was obtained by electrolyte diffusion in the dummy cell. For the T/CB counter electrodes, impedance spectra exhibit three separated semicircles, which correspond to resistances at the counter electrode/electrolyte interface *R<sub>ct</sub>*, the TiO<sub>2</sub>/carbon black interface, and the electrolyte diffusion *Z<sub>w</sub>* [30]. The *R<sub>ct</sub>* value is directly related to the amount of carbon content in turn of the number of catalytic sites. The higher amount of carbon content should lead to the lower *R<sub>ct</sub>* value. It has been observed that the *R<sub>ct</sub>* value of T/CB = 5:1 composite is lower than the T/CB = 10:1 due to the higher amount of carbon content which provides more catalytic sites for the reduction reaction. The composites T/CB = 2.5:1 and T/CB = 1:1 have even more amount of carbon content than the other two composites (T/CB = 10:1 and T/CB = 5:1 ratios), the former set showed higher *R<sub>ct</sub>* value than the later set due to their poor interconnection between T and CB as well as the poor adherence property with the

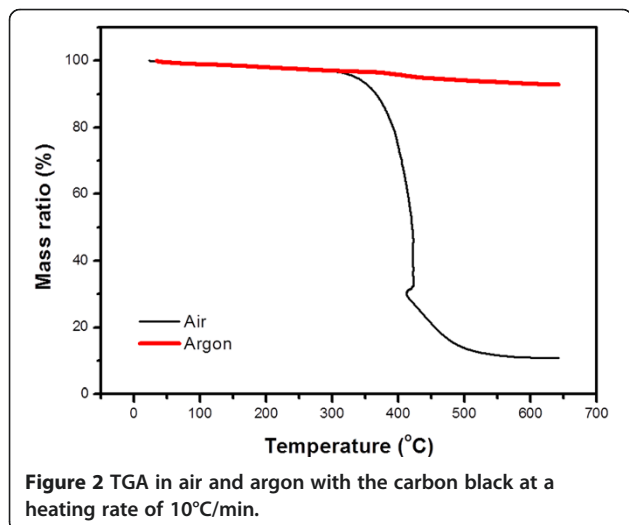

**Figure 2** TGA in air and argon with the carbon black at a heating rate of 10°C/min.

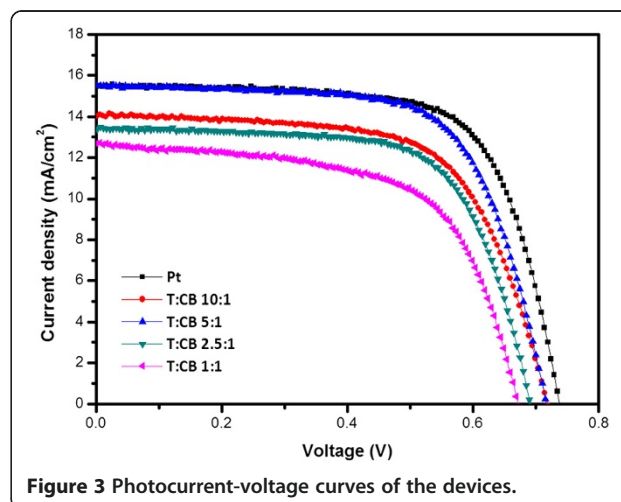

**Figure 3** Photocurrent-voltage curves of the devices.


**Table 1 Photovoltaic performance of Pt and TiO<sub>2</sub>/carbon black composites as counter electrode**

Composite	$J_{sc}$ (mA/cm <sup>2</sup> )	$V_{oc}$ (V)	FF (%)	$\eta$ (%)
Pt	15.5	0.73	69.3	7.7
T/CB (10:1)	14.1	0.71	64.6	6.6
T/CB (5:1)	15.5	0.71	67.4	7.4
T/CB (2.5:1)	13.5	0.69	68.7	6.5
T/CB (1:1)	12.6	0.66	61.3	5.1

FTO surface. The low frequency semicircle has a similar shape for all the T/CB composite cells because the diffusion in the electrolyte is invariant with the catalytic activity of the electrodes.

To further elucidate the electrochemical properties, the samples with the best-performing counter electrode were investigated by a cyclic voltammetry (CV) test with a scan rate of 50 mV/s. As shown in Figure 5, the counter electrodes based on the best-performing T/CB composites and Pt show similar shapes in terms of redox peak position with increased current density. In the CV curves, two pairs of redox peaks were obtained. The positive side, known as anodic, refers to the oxidation of iodide and triiodide, and the negative (cathodic) side refers to the reduction of triiodide. The reduction/oxidation peaks for the Pt and the T/CB composites are shown at -0.224 V/0.163 V and -0.394 V/0.333 V, respectively. The shift might be due to the higher  $R_{ct}$  between carbon black and the electrolyte. However, the T/CB composites exhibited comparable current density with the Pt electrode, and it indicates that the T/CB composites have higher intrinsic catalytic activity for redox reaction of iodide ions.

Finally, it should be noted that a key advance in this study is the integration of high-quality DSSC counter electrode device design for the reduction of triiodide in the DSSC system. CV, EIS, and photocurrent-voltage

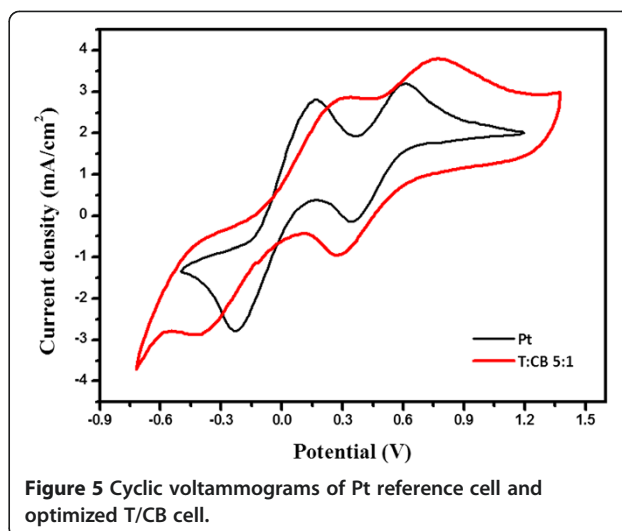


**Figure 5** Cyclic voltammograms of Pt reference cell and optimized T/CB cell.

analysis consistently confirm the excellent catalytic activities of the synthesized and optimized TiO<sub>2</sub>/carbon black composites, which are comparable to that of the Pt counter electrode. The prepared counter electrode effectively utilized the reduction of triiodide to iodide. In this architecture, the influence of various amounts of carbon black and TiO<sub>2</sub> loading can be explained. To get the high percolation of electrolyte and high surface area of catalytic sites, 40-nm TiO<sub>2</sub> nanoparticles were applied as a binder of carbon black and at the ratio of 5:1, T/CB shows comparable efficiency with Pt electrode.

### Conclusion

In summary, composites made of carbon black with 40-nm TiO<sub>2</sub> nanoparticles have been synthesized using the hydrothermal method. Different weight ratios of carbon black containing TiO<sub>2</sub> composites have been tested as the counter electrode material in order to analyze the catalytic performance of triiodide reduction reaction. The best optimized condition at a 5:1 ratio of TiO<sub>2</sub> and carbon black showed the overall efficiency of 7.4% while the well-known Pt as the counter electrode at the same condition shows 7.7% efficiency. The fill factors were strongly dependent on the loading of the carbon black powder and found to be around 68%. Interfacial charge transfer and mass transport were characterized by cyclic voltammetry and electrochemical impedance spectroscopy. This technique of synthesizing nanostructures for high surface area along with optimum carbon black loading afforded an effective and simple way to replace the Pt-based counter electrode for DSSC. Overall, the TiO<sub>2</sub>/carbon black-based DSSC showed excellent cell efficiency that rivals cells with a Pt-based CE and exhibited remarkable electrocatalytic activity. This work provides an intriguing way of structurally designing a low-cost, Pt-free, high-performance CE material for DSSCs.

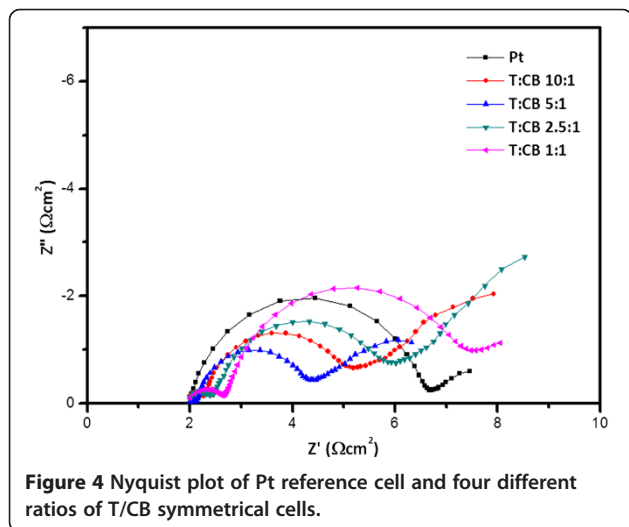

**Figure 4** Nyquist plot of Pt reference cell and four different ratios of T/CB symmetrical cells.



#### Competing interests

The authors declare that they have no competing interests.

#### Authors' contributions

JL participated in the design of the study, carried out the experiments, and drafted the manuscript. SYR and JK carried out the sample preparation and measurements. YJ supervised the work. All authors read and approved the final manuscript.

#### Acknowledgements

This work was financially supported by the MEST and KETEP (MKE) grants (2012 K001288, 20120009633, and 20114030200010).

#### Author details

<sup>1</sup>Interdisciplinary School of Green Energy, Ulsan National Institute of Science and Technology (UNIST), Ulsan 689-798, Republic of Korea. <sup>2</sup>Fine Chemical and Material Technical Institute, Ulsan Techno Park, Ulsan 681-802, Republic of Korea.

Received: 15 April 2013 Accepted: 6 May 2013

Published: 14 May 2013

#### References

- O'Regan B, Grätzel M: A low-cost, high-efficiency solar cell based on dye-sensitized colloidal TiO<sub>2</sub> films. *Nature* 1991, **353**:737–740.
- Nazeeruddin MK, Kay A, Rodicio I, Humphry-Baker R, Müller E, Liska P, Vlachopoulos N, Graetzel M: Conversion of light to electricity by cis-X2bis (2,2'-bipyridyl-4,4'-dicarboxylate)ruthenium(II) charge-transfer sensitizers (X = Cl-, Br-, I-, CN-, and SCN-) on nanocrystalline TiO<sub>2</sub> electrodes. *J Am Chem Soc* 1993, **115**:6382–6390.
- Hagfeldt A, Grätzel M: Molecular photovoltaics. *Acc Chem Res* 2000, **33**:269–277.
- Grätzel M: Photoelectrochemical cells. *Nature* 2001, **414**:338–344.
- Lim J, Lee M, Balasingam SK, Kim J, Kim D, Jun Y: Fabrication of panchromatic dye-sensitized solar cells using pre-dye coated TiO<sub>2</sub> nanoparticles by a simple dip coating technique. *RSC Adv* 2013, **3**:4801–4805.
- Wu J, Hao S, Lan Z, Lin J, Huang M, Huang Y, Li P, Yin S, Sato T: An all-solid-state dye-sensitized solar cell-based poly(N-alkyl-4-vinyl-pyridine iodide) electrolyte with efficiency of 5.64%. *J Am Chem Soc* 2008, **130**:11568–11569.
- Saji VS, Jo Y, Moon HR, Jun Y, Song HK: Organic-skinned inorganic nanoparticles: surface-confined polymerization of 6-(3-thienyl) hexanoic acid bound to nanocrystalline TiO<sub>2</sub>. *Nanoscale Res Lett* 2011, **6**:1–5.
- Ramkumar S, Anandan S: Synthesis of bianchored metal free organic dyes for dye sensitized solar cells. *Dyes Pigment* 2013, **97**:397–404.
- Fan J, Hao Y, Cabot A, Johansson EMJ, Boschloo G, Hagfeldt A: Cobalt(II/III) redox electrolyte in ZnO nanowire-based dye-sensitized solar cells. *ACS Appl Mater Interfaces* 2013, **5**:1902–1906.
- Kao MC, Chen HZ, Young SL, Lin CC, Kung CY: Structure and photovoltaic properties of ZnO nanowire for dye-sensitized solar cells. *Nanoscale Res Lett* 2012, **7**:1–16.
- Chiu PK, Cho WH, Chen HP, Hsiao CN, Yang JR: Study of a sandwich structure of transparent conducting oxide films prepared by electron beam evaporation at room temperature. *Nanoscale Res Lett* 2012, **7**:304.
- Powar S, Wu Q, Weideler M, Nattestad A, Hu Z, Mishra A, Bäuerle P, Spiccia L, Cheng YB, Bach U: Improved photocurrents for p-type dye-sensitized solar cells using nano-structured nickel(II) oxide microballs. *Energy Environ Sci* 2012, **5**:8896–8900.
- Murakami TN, Grätzel M: Counter electrodes for DSC: Application of functional materials as catalysts. *Inorg Chim Acta* 2008, **361**:572–580.
- Olsen E, Hagen G, Eric Lindquist S: Dissolution of platinum in methoxy propionitrile containing LiI/2. *Sol Energy Mater Sol Cells* 2000, **63**:267–273.
- Murakami TN, Ito S, Wang Q, Nazeeruddin MK, Bessho T, Cesar I, Liska P, Humphry-Baker R, Comte P, Péchy P, Grätzel M: Highly efficient dye-sensitized solar cells based on carbon black counter electrodes. *J Electrochem Soc* 2006, **153**:A2255–A2261.
- Wang M, Anghel AM, Marsan B, Ha NLC, Pootrakulchote N, Zakeeruddin SM, Grätzel M: CoS supersedes Pt as efficient electrocatalyst for triiodide reduction in dye-sensitized solar cells. *J Am Chem Soc* 2009, **131**:15976–15977.
- Kamiya K, Nishijima T, Tanaka K: Nitridation of the sol-gel-derived titanium oxide films by heating in ammonia gas. *J Am Ceram Soc* 1990, **73**:2750–2752.
- Choi D, Kumta PN: Synthesis of nanostructured TiN using a two-step transition metal halide approach. *J Am Ceram Soc* 2005, **88**:2030–2035.
- Kaskel S, Schlichte K, Kratzke T: Catalytic properties of high surface area titanium nitride materials. *J Mol Catal A: Chem* 2004, **208**:291–298.
- Jo Y, Cheon JY, Yu J, Jeong HY, Han CH, Jun Y, Joo SH: Highly interconnected ordered mesoporous carbon-carbon nanotube nanocomposites: Pt-free, highly efficient, and durable counter electrodes for dye-sensitized solar cells. *Chem Commun* 2012, **48**:8057–8059.
- Zhang DW, Li XD, Chen S, Tao F, Sun Z, Yin XJ, Huang SM: Fabrication of double-walled carbon nanotube counter electrodes for dye-sensitized solar cells. *J Solid State Electrochem* 2010, **14**:1541–1546.
- Lee WC, Ramasamy E, Lee DW, Song JS: Efficient dye-sensitized solar cells with catalytic multiwall carbon nanotube counter electrodes. *ACS Appl Mater Interfaces* 2009, **1**:1145.
- Novoselov KS, Geim AK, Morozov SV, Jiang D, Zhang Y, Dubonos SV, Grigorieva IV, Firsov AA: Electric field effect in atomically thin carbon films. *Science* 2004, **306**:666–669.
- Ramasamy E, Lee WJ, Lee DY, Song JS: Nanocarbon counterelectrode for dye sensitized solar cells. *Appl Phys Lett* 2007, **90**:173103.
- Ramasamy E, Lee WJ, Lee DY, Song JS: Spray coated multi-wall carbon nanotube counter electrode for tri-iodide (I<sub>3</sub><sup>-</sup>) reduction in dye-sensitized solar cells. *Electrochem Commun* 2008, **10**:1087–1089.
- Wang G, Xing W, Zhuo S: Application of mesoporous carbon to counter electrode for dye-sensitized solar cells. *J Power Sources* 2009, **194**:568–573.
- Joshi P, Xie Y, Ropp M, Galipeau D, Bailey S, Qiao Q: Dye-sensitized solar cells based on low cost nanoscale carbon/TiO<sub>2</sub> composite counter electrode. *Energy Environ Sci* 2009, **2**:426–429.
- Burnside SD, Shklover V, Barbé C, Comte P, Arendse F, Brooks K, Grätzel M: Self-organization of TiO<sub>2</sub> nanoparticles in thin films. *Chem Mater* 1998, **10**:2419–2425.
- Hu H, Chen BL, Bu CH, Tai QD, Guo F, Xu S, Xu JH, Zhao XZ: Stability study of carbon-based counter electrodes in dye-sensitized solar cells. *Electrochim Acta* 2011, **56**:8463–8466.
- Wang Q, Moser JE, Grätzel M: Electrochemical impedance spectroscopic analysis of dye-sensitized solar cells. *J Phys Chem B* 2005, **109**:14945–14953.

doi:10.1186/1556-276X-8-227

Cite this article as: Lim et al.: A study of TiO<sub>2</sub>/carbon black composition as counter electrode materials for dye-sensitized solar cells. *Nanoscale Research Letters* 2013 **8**:227.

Submit your manuscript to a SpringerOpen® journal and benefit from:

- Convenient online submission
- Rigorous peer review
- Immediate publication on acceptance
- Open access: articles freely available online
- High visibility within the field
- Retaining the copyright to your article

Submit your next manuscript at ► [springeropen.com](http://springeropen.com)