



RESEARCH ARTICLE

Open Access

The study of leachate treatment by using three advanced oxidation process based wet air oxidation

Behroz Karimi¹, Mohammad Hassan Ehrampoush^{2*}, Asghar Ebrahimi³ and Mehdi Mokhtari²

Abstract

Wet air oxidation is regarded as appropriate options for wastewater treatment with average organic compounds. The general purpose of this research is to determine the efficiency of three wet air oxidation methods, wet oxidation with hydrogen peroxide and absorption with activated carbon in removing organic matter and nitrogenous compounds from Isfahan's urban leachate. A leachate sample with the volume of 1.5 liters entered into a steel reactor with the volume of three liters and was put under a 10-bar pressure, at temperatures of 100, 200, and 300° as well as three retention times of 30, 60, and 90 minutes. The sample was placed at 18 stages of leachate storage ponds in Isfahan Compost Plant with the volume of 20 liters, using three WPO, WAO methods and a combination of WAO/GAC for leachate pre-treatment. Thirty percent of pure oxygen and hydrogen peroxide were applied as oxidation agents. The COD removal efficiency in WAO method is 7.8-33.3%, in BOD is 14.7-50.6%, the maximum removal percentage (efficiency) for NH₄-N is 53.3% and for NO₃-N is 56.4-73.9%. The removal efficiency of COD and BOD₅ is 4.6%-34 and 24%-50 respectively in WPO method. Adding GAC to the reactor, the removal efficiency of all parameters was improved. The maximum removal efficiency was increased 48% for COD, 31%-43.6 for BOD₅ by a combinational method, and the ratio of BOD₅/COD was also increased to 90%. In this paper, WAO and WPO process was used for Leachate pre-treatment and WAO/GAC combinational process was applied for improving the organic matter removal and leachate treatment; it was also determined that the recent process is much more efficient in removing resistant organic matter.

Keywords: Leachate, Compost plant, Wet air oxidation, Wet peroxide oxidation

Introduction

Leachate treatment is complex compound because of high concentration of COD and nitrogen [1]. Due to very high organic load and also nitro fixation inhibitory compounds, the presence of high values of free ammonium and inhibitory material like toxic compounds, biological processes are conducted with difficulty; hence, a method will be needed for leachate pre-treatment before a biological unit [2]. On the other hand, the existence of free ammonium in biological treatment is considered as a toxic agent for microorganisms; therefore, the reduction of ammonium concentration will be needed. Different methods are used for removing free ammonium [3].

For example, ammonium removal with appropriate aeration at high pH, chemical precipitation, etc. [4].

AOP and WAO processes are considered as appropriate options for wastewater treatment with average organic compounds [5]. A complete removal of organic matter is not economically possible by these methods in most cases; since final oxidation products includes acids with low molecular weight, a combination of chemical oxidation processes can be desirable with these processes [6,7]. In addition, combined processes of chemical oxidation and biological treatment will be usable for producing clean effluents [8,9]. The wet air oxidation process (WAO) is used for the reduction of severe pollution of aquatic environments to toxic material and organic matter like industrial wastewaters and sludge pre-treatment from refineries [10]. In this method, by setting an appropriate temperature and pressure and

* Correspondence: ehrampoush@ssu.ac.ir

²Department of Environmental Health Engineering, School of Health, ShahidSadoughi University of Medical Sciences, Yazd, Iran
Full list of author information is available at the end of the article

injecting determined values of oxidant (air, oxygen, hydrogen peroxide, ozone, etc.), the oxidation operation of organic matter is conducted [11]. The organic matter in a liquid phase is placed under the temperature of 100-350°C and the pressure of 5–200 bars [12]. Hydrogen peroxide and powdered or granular activated carbon can be applied for increasing the efficiency of WAO process [13].

In this study, due to high organic load and leachate ammonium of the Compost Plant, the wet air oxidation method and WAO catalytic methods like wet oxidation method with (WAO) hydrogen peroxide and WAO/GAC combined process were applied. The advantages of these methods are to breaking organic material and increase a biodegradation capability and to reduce the effluent toxicity [14]. The purpose of this research is to determine the efficiency of three methods, including wet air oxidation, wet oxidation with hydrogen peroxide, and the absorption process in removing the organic matter as well as nitrogenous compounds from urban Leachate of Isfahan composting factory.

Materials and methods

WAO method: a reactor with the volume of three liters was used which is able to bear a pressure to 100 bars and equipped with a pressure drain valve, monometer, an injection pipe, a sample output, etc. (manufactured by Combine Company of Arak). Leachate sampling is taken from an evaporative lagoon. The prepared sample with the volume of 1.5 liters was entered into a steel (stainless) reactor. Study was conducted at three temperatures of 100, 200, and 300°C as well as three retention times of 30, 60, and 90 min. To determine the pressure, an initial pilot study was done; then a 10-bar pressure was selected as the best one. A schematic of the WAO process is in Figure 1.

WPO method: the used reactor for WPO method also includes similar characteristics. An oxidation reaction

with hydrogen peroxide was performed in the reactor under a high pressure (10 bars). The only difference of this method with WAO is in creating acidic conditions of the environment before the sample entry into the reactor. After injecting 1.5 liters of the sample into the reactor per liter of the sample, the volumes of 1, 2.5, and 5 mL of hydrogen peroxide (30% w/v) was added to the reactor as an oxidant. After passing the test steps, and the reactor cooling, parameters were measured. How to operate the reactor with WPO method is available in Table 1.

WAO/GAC method: a reactor used in this method has similar characteristics with WAO, and 2 g/L value of the granular activated carbon was added to the reactor. For getting further results, pH solution on 5.5 was set in accordance to the previous study [15]. Prior to GAC entry into the reactor, it was heated at the temperature of 105°C for 24 hours in the oven, and then was entered into a desiccator. After doing reactions in the reactor, a centrifuge with 6000 rpm per 15 minutes was applied to separate GAC prior to chemical analyses. All the steps were taken to prepare the granular activated carbon in accordance to the study of Klç et al. [15].

Chemical: The iron sulfate ($\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$), H_2O_2 (30% W/V), H_2SO_4 , NaOH, acetic acid (CH_3COOH), potassium dichromate ($\text{K}_2\text{Cr}_2\text{O}_7$), HgSO_4 , Ag_2SO_4 , manganese oxide and powder and granular activated carbon were purchased from Merck, Germany.

Studied parameters: in order to study the reactor performance and compare three oxidation processes, (BOD_5 and COD) organic load values, ammonium and nitrate were performed in terms of Standard Methods 5220-C and 5210-B [16]. COD measurement was conducted based on Dichromate method (closed reflux, 5220C, colorimetric method), and BOD_5 in accordance to Winkler's method (5210 B) (APHA, 2005). In addition, to measure ammonia and nitrate concentrations, a spectrophotometer DR/2000 was used in accordance to EPA method (960 and 351).

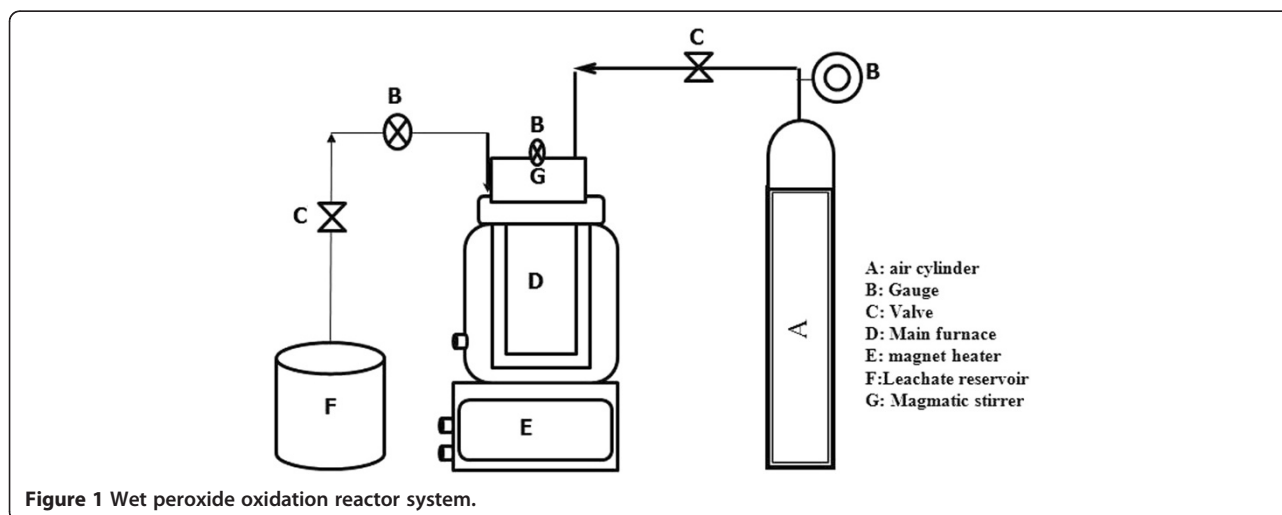


Figure 1 Wet peroxide oxidation reactor system.

Table 1 Wet Peroxide oxidation operational conditions

Oxidizing agent	pure oxygen and H ₂ O ₂
Partial Pressure of O ₂	10 bar
Temperature	100, 200 and 300°C
Volume of reactor and sample	3 L and sample Volume 1500 CC
Duration of the reactions	1.5 hours after preheating period
Reaction time	30, 60 and 90 min
Cooling of reactor	2-3 h
Mixing inside reactor	50 S ⁻¹

Other parameters like pH, temperature, and EC were also measured before and after the reaction using a pH device (with a model of 520-HACH) based on APHA Standard Methods.

All data were subjected to two-way analysis of variance (ANOVA), paired and independent sample T-test and Pearson correlation using SPSS Version 14. Statistical significance was tested using Confidence Interval 95%. The results are shown as mean with excel Version 2010.

Results

The study was conducted at three temperatures 100, 200, and 300°C and the retention time 30-90 min. In Tables 2 and 3, the removal efficiency of different parameters has been taken in to consideration by all three parameters in different temperatures and retention times.

WAO process and WAO/GAC combined processes: in Tables 2 and 3, the effect of changes in temperature and retention time on the removal efficiency of two COD and BOD parameters is available in three methods WAO, WAO/GAC and WPO. Table 3 indicates the removal efficiency (%) of different parameters by the wet oxidation process with pure oxygen as well as WAO/GAC combined process in different temperatures and retention times.

WPO process: the maximum removal efficiency of COD (39.5) was obtained in the temperature of 300°C, retention time of 90 minutes and volume of H₂O₂, 5 mL (Table 2). In Table 2, the removal efficiency (%) of different parameters is available by the wet oxidation process with hydrogen peroxide (WPO) in different temperatures and retention times. In the temperature 100°C, the removal efficiency of ammonium is 68% at the volume of 1 ml peroxide and retention time of 90 minutes which is the most efficiency. The most production efficiency of this parameter is 14.6% in the temperature of 300°C, retention time of 90 minutes, and peroxide volume of 5 ml. Also efficiency has been increased in 5 ml peroxide and 60 minutes so that the average efficiency is 19.7%.

In Figures 2, 3, 4, the comparison of the removal efficiency of three methods WAO, WPO and WAO/GAC is available in COD, BOD and NH₃-N removal.

Discussion

WAO process: because of refractory organic compounds in the leachate, biodegradation capability is usually low. To improve the degradation capability, WAO process was applied to pre-treatment [17]. According to the presence of refractory compounds in the leachate, COD removal efficiency was obtained low. Average COD removal efficiency in WAO process is 7.8-33.3%. This method is unable to remove the entire organic load in a limited time. Due to the degradation of heavy compounds and large molecules of organic compounds to simpler ones, the COD value is increased; and consequently despite desired efficiency of the process, the efficiency of the reactor appears low [18]. During the process, it may create intermediate compounds, including volatile fatty acids (VFAs). Perhaps, the reason for pH reduction after the process is the same matter so that it was reduced from the average value of 7-8 in the input to 5-6 [19]. The average value of NH₄-N was

Table 2 Effects of changes in temperature, retention time and H₂O₂ volume on the COD and BOD removal efficiency (%) in WPO process

Parameter	H ₂ O ₂ volumes Temperature time	1 mL			2.5 mL			5 mL		
		100°C	200°C	300°C	100°C	200°C	300°C	100°C	200°C	300°C
COD	30 min	4.66	4.5	16	15	21.7	19.5	20.6	10.8	21.3
	60 min	6.6	27.5	24.8	23.6	32.8	26	29	33.7	30
	90 min	12	42	34	31.5	44	36.3	32	34	39.4
BOD	30 min	39	32.5	20.7	25.7	10.4	39	24	31.5	32
	60 min	35.7	26.3	39.7	29.9	21.5	40.5	37	35	36.8
	90 min	30	34	45	36.5	32	44	40	42	50
NH ₃	30 min	68.1	54.5	54	53.5	56	56	58	35	34
	60 min	57.5	57	69	48.5	64	61	65.5	28	28
	90 min	29	58	41	49	65	56	79.5	25	25

Table 3 Effects of changes in temperature and retention time on the COD and BOD removal efficiency (%) in WAO and WAO/GAC methods

Parameter	Methods Temperature time	WAO			WAO/GAC		
		100°C	200°C	300°C	100°C	200°C	300°C
COD	30 min	7.8	12.6	19	35	41	43.5
	60 min	15.2	16.2	24.6	33	41.7	46
	90 min	24	28	33	41.5	48	56
BOD	30 min	44.5	47	50.6	38	35.5	43.5
	60 min	31	41.3	46	35	35	41.5
	90 min	15	25.5	38.5	31	33	35
NH ₃	30 min	6	29.4	31.5	37	58.4	63
	60 min	9.6	42.43	50.9	42.5	52	58
	90 min	15.4	47.61	54.6	53	64.6	68

changed from 180.2 to 84–300 g/L in the raw leachate. NO₃-N was also reduced from 578 mg/L to the values of 150.6-252 mg/L. The maximum removal percentage (efficiency) of NH₄-N was obtained 53.3% and 56.4-73.9% for NO₃-N. In general, the average removal percentage of NO₃-N is 65% in this process. Huang et al. (2001) observed that with the increase of temperature to more than 300°C, the ammonium production is increased and pH decreased [3].

WPO process: this method has been used in many industrial processes, such as food industry wastewater [20], color removal from textile industry, sludge wastewater treatment, pharmaceutical industry treatment, production of chemicals, organic matter degradation, cellulosic compounds of water steam pre-treatment produced from processes of food processing, sugar refinement, coffee production, etc. [21]. Due to the use of hydrogen peroxide at a high temperature and pressure, oxidation power and the formation of oxidizing radicals are increased. Using this process will result in the improvement of COD removal efficiency. The removal efficiency of the process in COD removal was increased to 4.6-11.95% at 100°C, and to 16-34% at 300°C at the volume of 1 ml hydrogen peroxide.

The COD removal efficiency was increased to 4.6-11.95% at 100°C and the maximum used volume of hydrogen peroxide was 20–32.2% and increased to 21-39% at 300°C. The removal efficiency of BOD₅ also reached 23.9-40% at 100°C and 31.9-50% at 300°C at the volume of 5 mL hydrogen peroxides. The BOD₅ removal efficiency was increased compared to the previous stage (Table 2), but it is observed, the efficiency is more at 300°C. In a study by Rodruetz, E.M et al. for atrazine degradation that the wet oxidation method with hydrogen peroxide was applied, it was seen that with increasing the volume of injected hydrogen peroxide, the organic matter degradation was added. Oxygen injection in these conditions was also added to the work efficiency. Results of this study confirm the recent consideration too [22].

The results of a study by Jing et al. [23] showed that WPO can reduce the organic compounds of oil sludge effectively; in addition, the retention and reaction temperature were regarded as the important factors for removing COD. At the reaction temperature of 340°C, the initial volume of oil field sludge 4000 mg/L, retention time of 9 minutes, and the COD removal efficiency reached 88.6%. The COD removal efficiency was

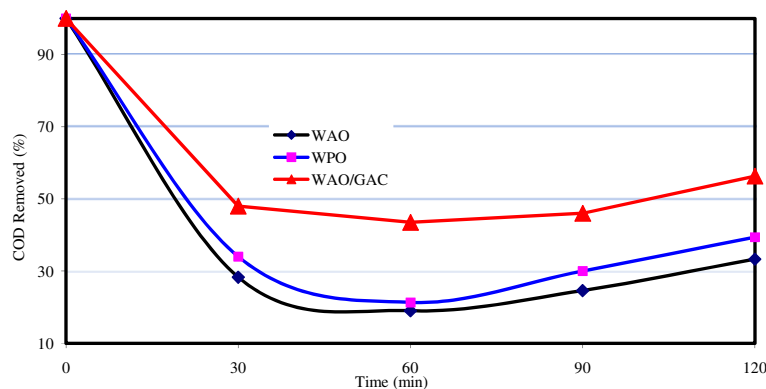


Figure 2 The comparison of the removal efficiency of three methods WAO, WPO and WAO/GAC in COD removal.

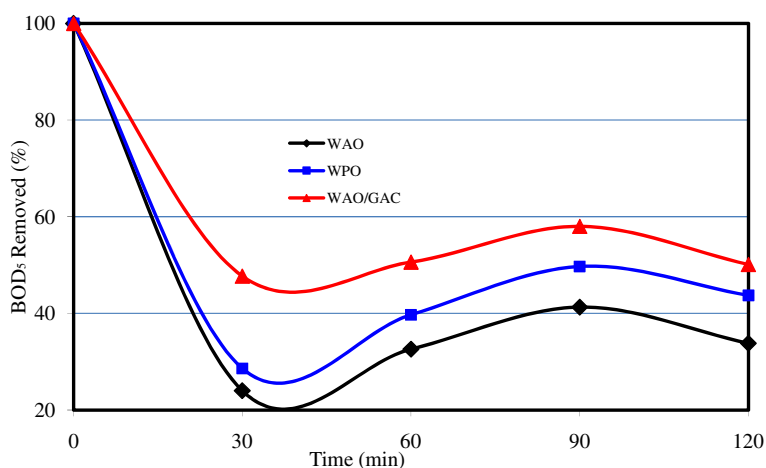


Figure 3 The comparison of the removal efficiency of three methods WAO, WPO and WAO/GAC in BOD removal.

increased by the increase in the reaction temperature and retention time [23].

WAO in combination with GAC: adding GAC to the reactor, COD removal efficiency was improved. The maximum removal efficiency of COD was 48% by this method; whereas, the maximum removal efficiency of WAO is only 33%. As it is observed from Figures 2, 3, 4, the most COD removal efficiency is concerned with WAO/GAC combined process.

The disadvantages of the method will be high consumption of energy and GAC that need was regenerated; however, among the three studied methods, this one is more appropriate for removing the organic matter and ammonium. The BOD₅ removal efficiency is 31–43.6%, and the ratio of BOD₅/COD was also increased to 90%. Some researchers know WAO combined method with GAC activated carbon as an appropriate option for the leachate treatment due to synergist property [24].

WAO enables the initial oxidation of organic compounds to more stable oxidized state, also decomposition of large and resistant pollutants to small molecules,

and as a result, CO₂ and H₂O formation of water; whereas, GAC results in increasing the reaction rate in a degradation process through the formation of H₂O radicals. It reacts quickly with target compounds in the leachate via OH radicals and gives rise to final degradation of the leachate. Increasing the oxidation of organic compounds by WAO in the leachate is dependent on the initial value of GAC and reactions chain of WAO degradation. In this case, WAO by affecting the decomposition of molecules will result in the absorption increase in pyrrolic groups in a graphenic layer in GAC (the same basal level of electrons), and due to the reduction in microporous congestion, the absorption power will be increased. In addition, to regenerate the activated carbon, WAO method can be applied [25].

The regeneration of activated carbon is performed by heating carbon at the temperature of 700° to 900°C. As a result, energy costs and large amounts of carbon are lost due to heat. The regeneration of activated carbon by WAO is more appropriate than thermal regeneration of the activated carbon. Results of this operation in a

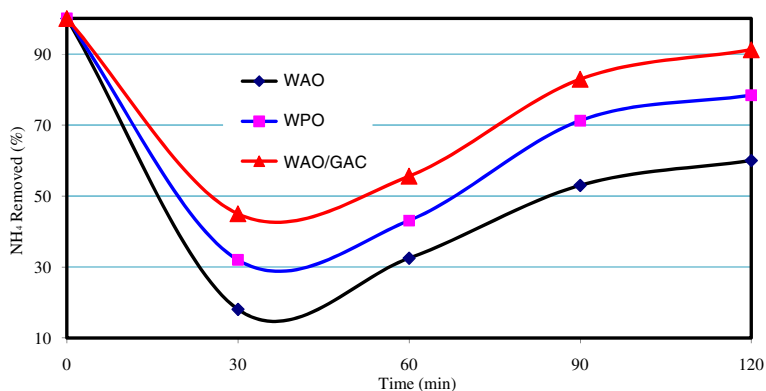


Figure 4 The comparison of the removal efficiency of three methods WAO, WPO and WAO/GAC in NH₃ removal.

laboratory scale indicated that due to increased breakdown of the organic compounds to simpler ones at higher temperatures, the use of this method along with a biological treatment (aerobic and anaerobic) can be a promising option for the leachate treatment of the compost plant [26].

Also, given that no similar work has been done using the wet oxidation method, therefore, it is required that other researchers apply the results of this plan or method in a semi-industrial and full scale. The problems of this study include an accurate setting of pressure and temperature in the reactor, the possibility of bursting pipes and fittings during work, etc.

Conclusion

The study considers the wet air oxidation process to reduce organic load from the composting factory leachate. The WAO process is very effective in oxidizing high concentrations of organic matter to obtain more than 35% and 38% removal efficiency of COD and BOD₅. Using WPO process will result in the improvement of COD removal efficiency. The removal efficiency of the process in COD removal was increased to 4.6-11.95% at 100°C, and to 16-34% at 300°C at the volume of 1 ml hydrogen peroxide. The removal efficiency of BOD₅ also reached 23.9-40% at 100°C and 31.9-50% at 300°C at the volume of 5 mL hydrogen peroxides. Adding GAC to the reactor, COD removal efficiency was improved. The maximum removal efficiency of COD was 48% by this method; whereas, the maximum removal efficiency of WAO is only 33%. Results of this operation in a laboratory scale indicated that due to increased breakdown of the organic compounds to simpler ones at higher temperatures, the use of this method along with a biological treatment (aerobic and anaerobic) can be a promising option for the leachate treatment of the compost plant.

Competing interests

The authors declare that they have no competing interests.

Authors' contributions

This work is part of the Master thesis of BK that MHE developed initial idea and proposed and supervised the whole work. BK administered data collection. AE and MM are Faculty advisor of thesis. All authors read and approved the final manuscript.

Acknowledgements

The authors acknowledge financial and scientific support provided by the Faculty of Environment Health, Shahid Sadoughi University of Medical Sciences, Yazd, Iran.

Author details

¹Department of Environmental Health Engineering, School of Health, Arak University of Medical Sciences, Arak, Iran. ²Department of Environmental Health Engineering, School of Health, Shahid Sadoughi University of Medical

Sciences, Yazd, Iran. ³Environmental Research Center, School of Health, Isfahan University of Medical Sciences, Isfahan, Iran.

Received: 12 December 2012 Accepted: 15 December 2012

Published: 2 January 2013

References

1. Ghaly A, Kamal M, Mahmoud N, Cote R: **Treatment of Landfill Leachate using Limestone/Sandstone Filters Under Aerobic Batch Conditions.** *Am J Environ Sci* 2007, **3**(2):43-53.
2. Ozturk I, Altinbas M, Koyuncu I, Arıkan O, Gomec-Yangin C: **Advanced physico-chemical treatment experiences on young municipal landfill leachates.** *Waste Manage* 2003, **23**(5):441-446.
3. Huang TL, MacInnes JM, Cliffe KR: **Nitrogen removal from wastewater by a catalytic oxidation method.** *Water Res* 2001, **35**(9):2113-2120.
4. Levec J, Pintar A: **Catalytic wet-air oxidation processes: a review.** *Catal Today* 2007, **124**(3):172-184.
5. Kurniawan TA, Lo WH, Chan G: **Degradation of recalcitrant compounds from stabilized landfill leachate using a combination of ozone-GAC adsorption treatment.** *J Hazard Mater* 2006, **137**(1):443-455.
6. Gené N, Yonsel S, Dagasan L, Onar AN: **Wet oxidation: a pre-treatment procedure for sludge.** *Waste Manage* 2002, **22**(6):611-616.
7. Taghipour A, Mahvi AH, Nabizade R, Dehghanzade R: **Study the efficiency of the combined system of coagulation and flocculation/ozonation in treatment of fresh landfill Leachates in Tabriz City.** *Iran J Health & Environ* 2011, **4**(1):57-64.
8. Hung CM, Lou JC, Lin CH: **Removal of ammonia solutions used in catalytic wet oxidation processes.** *Chemosphere* 2003, **52**(6):989-995.
9. Hajipour A, Moghadam N, Nosrati M, Shojasadatı S: **Aerobic thermophilic treatment of landfill leachate in a moving-Bed biofilm bioreactor.** *Iran J Health & Environ* 2011, **8**(1):3-14.
10. Karimi B, Ehrampoush MH, Ebrahimi A, Mokhtari M, Amin MM: **Catalytic oxidation of hydrogen peroxide and the adsorption combinatory process in leachate waste pretreatment from composting factory.** *Int J Env Health Eng* 2012, **1**(1):15-20.
11. Perathoner S, Centi G: **Wet hydrogen peroxide catalytic oxidation (WHPCO) of organic waste in agro-food and industrial streams.** *Top Catal* 2005, **33**(1):207-224.
12. Rivas FJ, Beltrán FJ, Carvalho F, Alvarez PM: **Oxone-promoted wet air oxidation of landfill leachates.** *Ind Eng Chem Res* 2005, **44**(4):749-758.
13. Wang F, Smith DW, El-Din MG: **Application of advanced oxidation methods for landfill leachate treatment-A review.** *J Environ Eng Sci* 2003, **2**(6):413-427.
14. Kaewpuang-Ngam S, Inazu K, Kobayashi T, Aika KI: **Selective wet-air oxidation of diluted aqueous ammonia solutions over supported Ni catalysts.** *Water Res* 2004, **38**(3):778-782.
15. Kılıç MY, Kestioglu K, Yonar T: **Landfill leachate treatment by the combination of physicochemical methods with adsorption process.** *Biol Environ Sci* 2007, **1**(1):37-43.
16. Apha A, WEF: *Standard Methods for the Examination of Water and Wastewater.* American Public Health Association, American Water Works Association, and Water Environment Federation; 2005.
17. Li Y, Wang J, Liu Y: *Degradation of Landfill Leachate and Short Chain Organic Acids by Catalytic Wet Air Oxidation Over Mn/Ce and Co/Bi Catalyst.* IEE; 2008:3047-3050.
18. Karimi B, Ehrampoush MH, Mokhtari M, Ebrahimi A: **Leachate treatment Using Wet Air oxidation processes.** *Iran J Health & Environ* 2011, **4**(1):23-34.
19. Abu-Hassan MA, Mantzavinos D, Metcalfe IS: **Wet air oxidation and ultrasound for the removal of linear alkylbenzenesulfonates from wastewater: the beneficial role of catalysis.** *Top Catal* 2005, **33**:141-148.
20. Bhargava SK, Tardio J, Prasad J, Föger K, Akolekar DB, Grocott SC: **Wet oxidation and catalytic wet oxidation.** *Ind Eng Chem Res* 2006, **45**(4):1221-1258.
21. Neyens E, Baeyens J, Weemaes M: **Pilot-scale peroxidation (H₂O₂) of sewage sludge.** *J Hazard Mater* 2003, **98**(1):91-106.
22. Rodriguez EM, Alvarez PM, Rivas FJ, Beltrán FJ: **Wet peroxide degradation of atrazine.** *Chemosphere* 2004, **54**(1):71-78.
23. Jing G, Luan M, Chen T: **Wet peroxide oxidation of oilfield sludge.** *Arabian J Chem* 2011, In press.

24. Zazo J, Casas J, Mohedano A, Rodríguez J: **Catalytic wet peroxide oxidation of phenol with a Fe/active carbon catalyst.** *Appl Catal B* 2006, **65**(3):261–268.
25. Rey A, Faraldos M, Casas J, Zazo J, Bahamonde A, Rodríguez J: **Catalytic wet peroxide oxidation of phenol over Fe/AC catalysts: influence of iron precursor and activated carbon surface.** *Appl Catal B* 2009, **86**(1–2):69–77.
26. Okawa K, Suzuki K, Takeshita T, Nakano K: **Regeneration of granular activated carbon with adsorbed trichloroethylene using wet peroxide oxidation.** *Water Res* 2007, **41**(5):1045–1051.

doi:10.1186/1735-2746-10-1

Cite this article as: Karimi *et al.*: The study of leachate treatment by using three advanced oxidation process based wet air oxidation. *Iranian Journal of Environmental Health Sciences & Engineering* 2013 **10**:1.

Submit your next manuscript to BioMed Central and take full advantage of:

- Convenient online submission
- Thorough peer review
- No space constraints or color figure charges
- Immediate publication on acceptance
- Inclusion in PubMed, CAS, Scopus and Google Scholar
- Research which is freely available for redistribution

Submit your manuscript at
www.biomedcentral.com/submit

