


Advertisers in This Issue

	Page No.
*Academic Press	20
*American Institute of Physics	72
Arizona State University	62
*BioSymb Technologies, Inc.	1
*Cambridge University Press	71
*Chapman and Hall	55, 69
*Digital Instruments, Inc.	7
Elchema	80
*Elsevier Science Inc.	74, 76, 78, 82
*Evans East	19
*Extrel, Division of Waters	8, 50
*High Voltage Engineering Europa B.V.	inside front cover
*Hitachi Scientific Instruments	23
*Huntington Laboratories	outside back cover
IEE/Inspec	66, 81
*Instruments SA, Inc.	24
*JEOL USA, Inc.	37
*Kurt J. Lesker Co.	11, 38
Linn High Therm	79
Magnet Sales & Manufacturing Inc.	64
*Marcel Dekker Inc.	65
*MDC Vacuum Products Corporation	18
*MKS Instruments, Inc.	2
*Nanophase Technologies Corporation	27
*National Electrostatics Corporation	16
*New Focus, Inc.	inside back cover
*Nor-Gal Products	10
*Oxford University Press	68
*Philips Analytical X-Ray	31
*Plasma Sciences, Inc.	56
*Plenum Publishing Corporation	12
*Princeton Gamma-Tech, Inc.	15
*Pure Tech Inc.	17
*Quantum Design	32
Rudolph Research	58
*Semiconductor Processing Company	49
*Solid State Equipment Corporation	26
*Sopra Inc.	88
*Springer Verlag	73
*Staib Instrumente	13
*Sycon Instruments	36
*Virginia Semiconductors Inc.	59, 61, 63
*Voltaix, Inc.	62

For free information about the products and services offered in this issue, fill out and mail the Reader Service Card, or fax it to (312) 922-3165.

*Please visit us at the Exhibit, November 28–December 2, during the 1994 MRS Fall Meeting in Boston. For a complete list of exhibitors, please see page 70.

German Furnace Technology




Gastight Muffle Furnace. Fibre insulated muffle furnace with heat resistant gastight muffle insert for inert gas operation up to 1100 °C. Water cooled door flange. Chamber volume up to 200 liters available, based on our KS-series. As an option vacuumtight for temperatures up to 800 °C, gas supply, exhaust with burner.



High temperature furnace HT for universal heat treatment and sintering under air, gas and vacuum, short heating and cooling cycles, ceramic fibre or Graphite felt insulation, 1400 °C – 1900 °C, chamber volumes 4 to 52 liters; special systems on request.

Induction remelt furnace LIFUMAT-3.3-met

for sample preparation of Spectroscopy, from 50 gr. to 1 kg, casting under air, gas or vacuum.

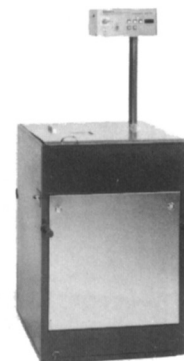

The Value Builder For Furnaces:



Micro
Specialty Systems, Inc.

Phone (215) 866-6200
Fax (215) 866-7710
10 South Commerce Way
Bethlehem, Pennsylvania 18017

Heinrich-Hertz-Platz 1
D-92275 Hirschbach
Germany
Tel. ++49-9665-91400
Fax. ++49-9665-1720

Circle No. 31 on Reader Service Card.