

Widening operators for powerset domains

Roberto Bagnara · Patricia M. Hill · Enea Zaffanella

Published online: 27 February 2007
 © Springer-Verlag 2007

Erratum to: Int J Softw Tools Technol Transfer
8(4/5): 449–466
DOI 10.1007/s10009-005-0215-8

In the printed version of this article unfortunately all figures are incomplete. Please find the correct version of all figures enclosed and in the online version of the original article.

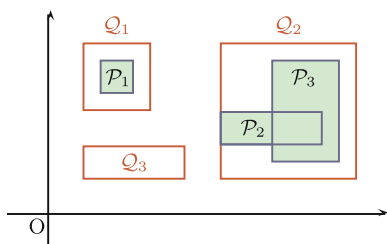


Fig. 1 The collection of Q_i approximates the collection of P_i

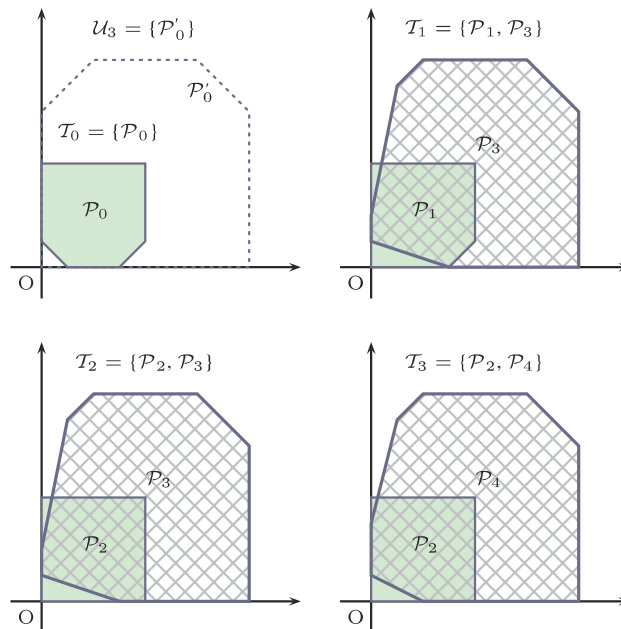


Fig. 2 The iterates T_0, T_1, T_2, T_3 and U_3 in Example 3

The online version of the original article can be found at
<http://dx.doi.org/10.1007/s10009-005-0215-8>.

R. Bagnara (✉) · E. Zaffanella
 Department of Mathematics,
 University of Parma, Parma, Italy
 e-mail: bagnara@cs.unipr.it

E. Zaffanella
 e-mail: zaffanella@cs.unipr.it

P. M. Hill
 School of Computing,
 University of Leeds, Leeds, UK
 e-mail: hill@comp.leeds.ac.uk

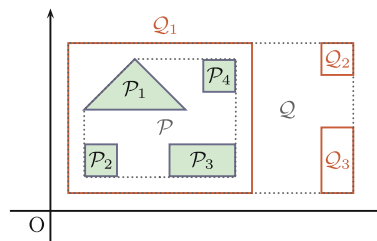


Fig. 3 The lgo relation on collections of polyhedra

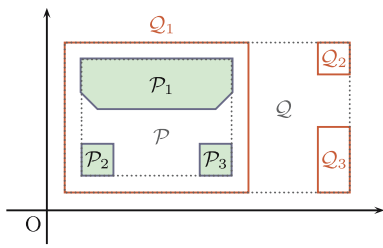


Fig. 4 The lgo relation on collections of polyhedra

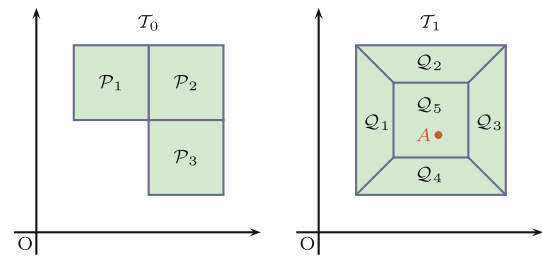


Fig. 6 Merging polyhedra according to '∞'

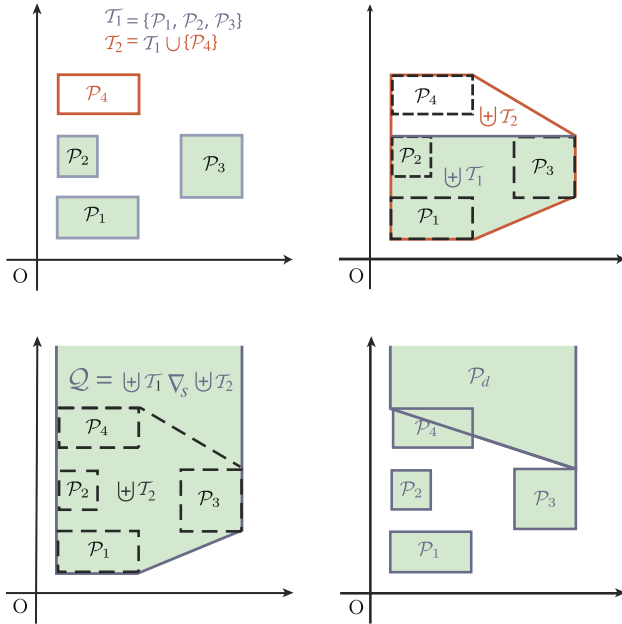


Fig. 5 The second case of the certificate-based widening

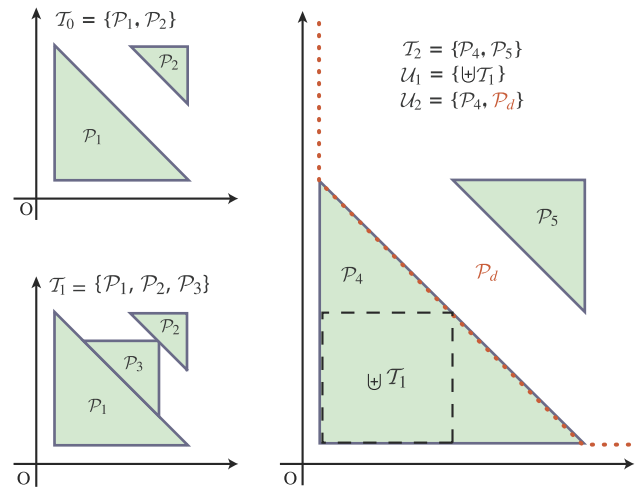


Fig. A.1 The condition $\#U_1 > 1$ is needed to obtain a proper widening