




Correction to: Virus propagation: threshold conditions for multiple profile networks

Angeliki Rapti¹  · Kostas Tsihclas² · Spyros Sioutas³ · Giannis Tzimas⁴

Published online: 18 December 2018
© Springer-Verlag London Ltd., part of Springer Nature 2018

Correction to: Knowledge and Information Systems <https://doi.org/10.1007/s10115-018-1274-y>

In the original publication, part figures were incorrectly positioned in Figure 2. The correct Fig. 2 is given below.

The original article can be found online at <https://doi.org/10.1007/s10115-018-1274-y>.

✉ Angeliki Rapti
arapti@ceid.upatras.gr
Kostas Tsihclas
tsihclas@csd.auth.gr
Spyros Sioutas
sioutas@ionio.gr
Giannis Tzimas
tzimas@cti.gr

- 1 University of Patras, Patras, Greece
- 2 Aristotle University of Thessaloniki, Thessaloniki, Greece
- 3 Ionian University, Corfu, Greece
- 4 Technological Educational Institute of Western Greece, Patras, Greece

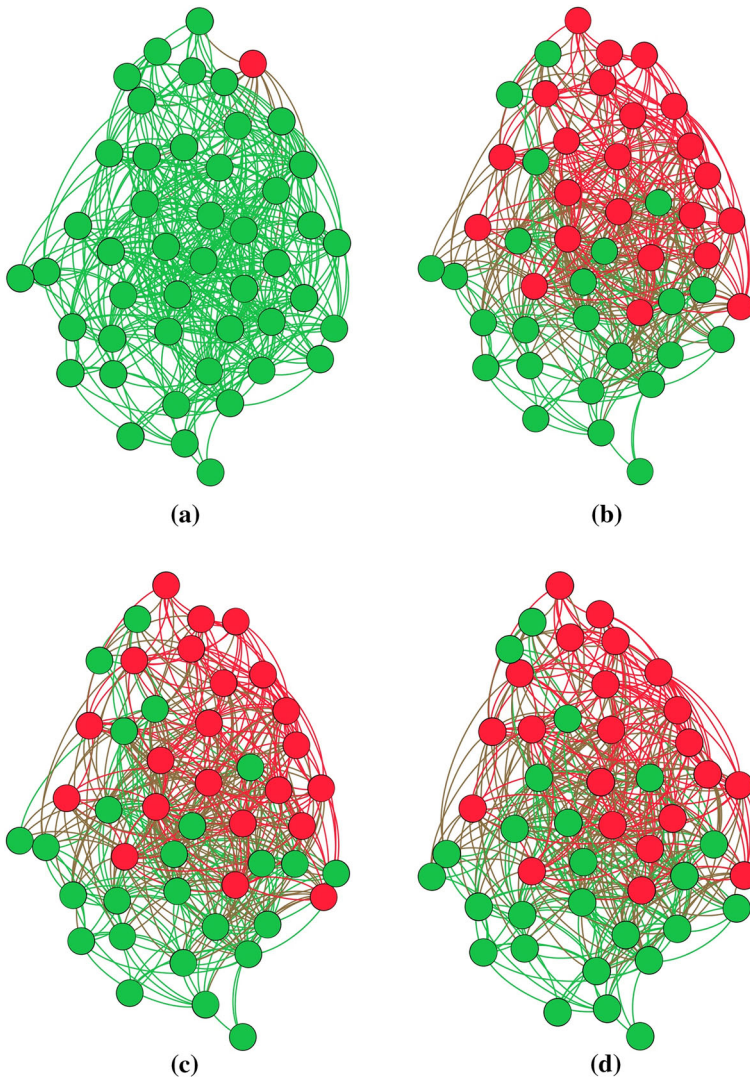


Fig. 2 A small subgraph of 47 nodes from the Enron email network in various phases of the infection process. Green nodes are susceptible nodes while red nodes are infected nodes. In figure **a** is the initial round (round 0) of the infection process and there is only one infected node in the network. In figure **b**, we observe round 2000 where the virus has spread in a greater part of the network. In figures **c**, **d** the infection has spread through a large part of the network and the system has reached a steady state where the amount of infected nodes is almost equal

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.